

201^{Q&As}

TMOS Administration

Pass F5 201 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/201.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by F5 Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

A virtual server is listening at 10.10.1.100:any and has the following iRule associated with it:

```
when CLIENT_ACCEPTED { if {[TCP::local_port] equals 21 } { pool  
ftppool } elseif {[TCP::local_port] equals 23 } { pool telnetpool }
```

If a user connects to 10.10.1.100 and port 22, which pool will receive the request?

- A. ftpool
- B. telnetpool
- C. None. The request will be dropped.
- D. Unknown. The pool cannot be determined from the information provided.

Correct Answer: D

QUESTION 2

A site needs a virtual server that will use an iRule to parse HTTPS traffic based on HTTP header values. Which two profile types must be associated with such a virtual server? (Choose two.)

- A. TCP
- B. HTTP
- C. HTTPS
- D. ServerSSL

Correct Answer: AB

QUESTION 3

Assume a virtual server has a ServerSSL profile. What SSL certificates are required on the BIG-IP?

- A. No SSL certificates are required on the BIG-IP.
- B. The BIG-IP's SSL certificates must only exist.
- C. The BIG-IP's SSL certificates must be issued from a certificate authority.
- D. The BIG-IP's SSL certificates must be created within the company hosting the BIG-IPs.

Correct Answer: A

QUESTION 4

A BIG-IP Administrator opens a case with F5 Support. The support engineer requests the BIG-IP appliance chassis serial number.



Which TMSH command will provide this information?

- A. . list /sys software
- B. show /sys version
- C. list/sys diags
- D. show /sys hardware

Correct Answer: D

QUESTION 5

Refer to the exhibit

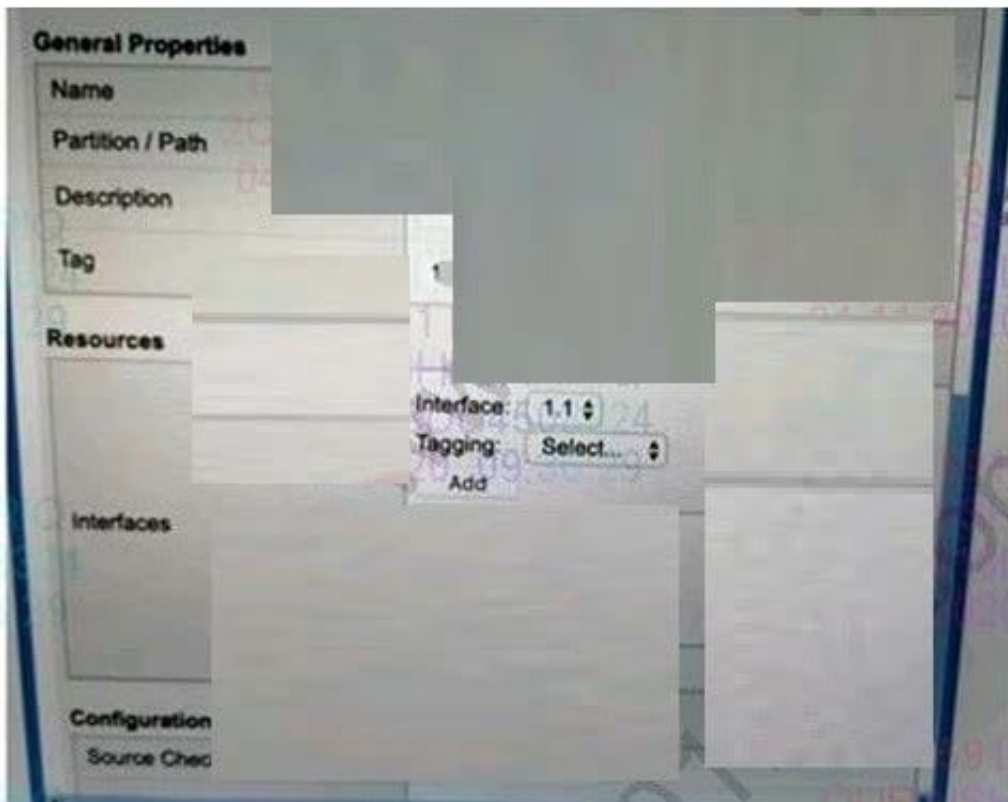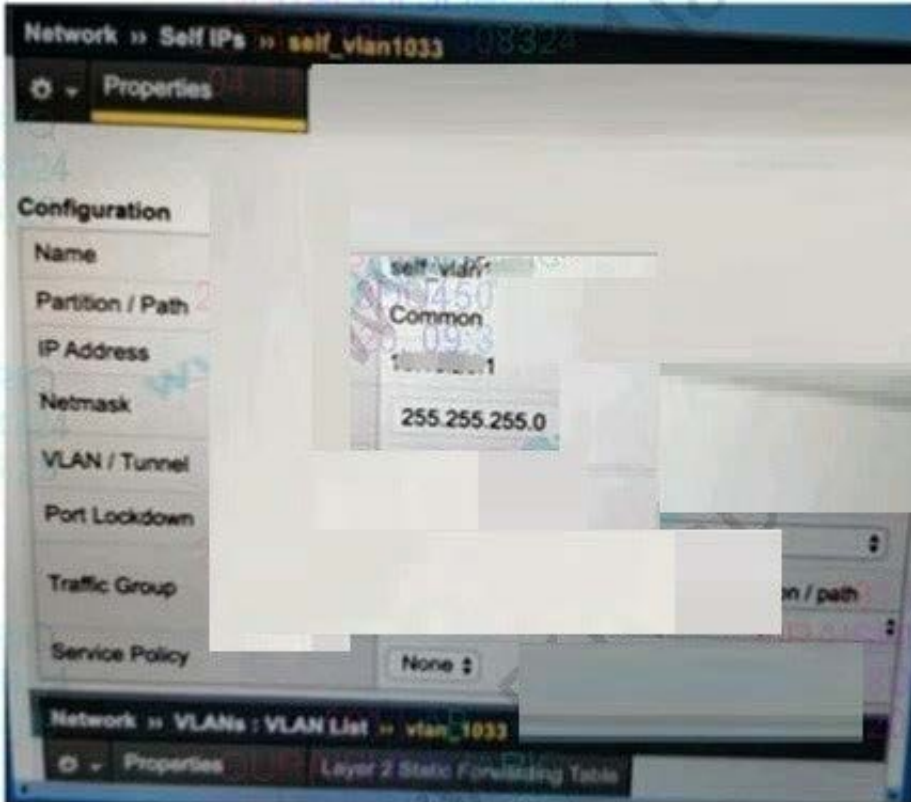

The network team creates a new VLAN on the switches. The BIG-IP Administrator needs to create a configuration on the BIG-IP device. The BIG-IP Administrator creates a new VLAN and Self IP, but the servers on the new VLAN are NOT reachable from the BIG-IP device.

Which action should the BIG-IP Administrators to resolve this issue?

- A. Set Port Lockdown of Set IP to Allow All
- B. Change Auto Last Hop to enabled
- C. Assign a physical interface to the new VLAN
- D. Create a Floating Set IP Address

Correct Answer: C

[201 VCE Dumps](#)

[201 Practice Test](#)

[201 Exam Questions](#)