300-320^{Q&As}

300-320^{Q&As} — rendered as:

300-320 $^{Q\&As}$

Designing Cisco Network Service Architectures

Pass Cisco 300-320 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass4lead.com/300-320.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco Official Exam Center

Instant Download After Purchase

100% Money Back Guarantee

365 Days Free Update
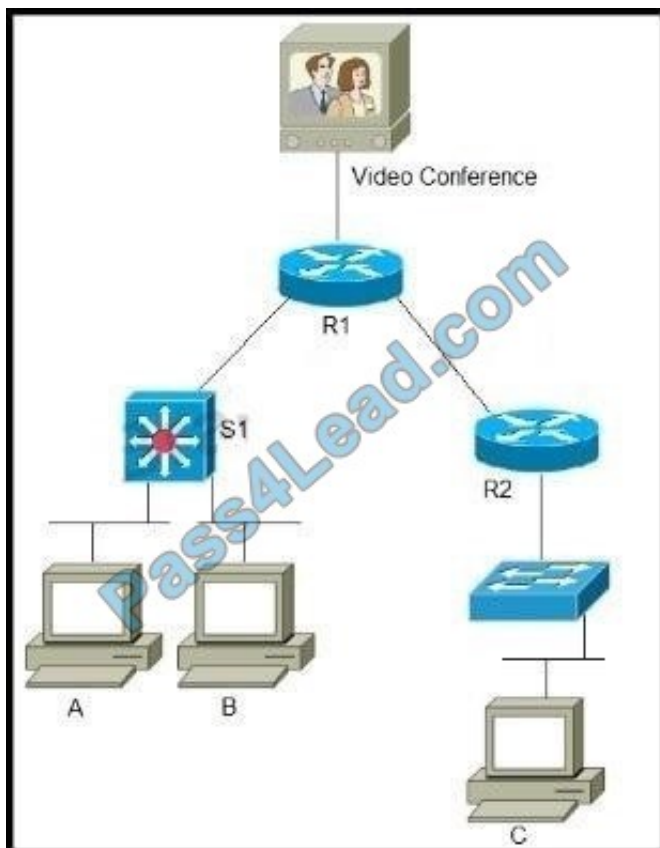
800,000+ Satisfied Customers

QUESTION 1

What security feature would require a packet to be received on the interface that the interface would use to forward the return packet?

A. urpf

B. arp inspection

C. vlan acl

D. ...

Correct Answer: A

QUESTION 2

Refer to the exhibit. The network engineer wants to ensure that receiver A does not receive traffic from the video conference.

For multicast traffic, where must the filtering be placed to fulfill that requirement?

A. R1

B. Video Conference

C. A

D. S1

E. R2

Correct Answer: D

QUESTION 3

A customer with 30 branch offices requires dynamic IGP routing protocol, IP multicast, and non-IP protocol support. Which solution satisfies these requirements?

A. dmvpn spoke-to-spoke

B. dmvpn hub-and-spoke

C. vti

D. p2p gre

E. IPsec direct encapsulation

Correct Answer: D

QUESTION 4

A network engineer is building a LAN design that includes Cisco NAC. What two characteristics of an out-of-band NAC deployment are important to consider when evaluating it for the design? (Choose two.)

A. supported by a limited number of switch models

B. never in-line with user traffic

C. aggregate client traffic is constrained to NAC server port speed

D. recommended if sharing ports between IP phones and PCs

E. supports real IP gateway (routed mode)

Correct Answer: AD

https://www.safaribooksonline.com/library/view/foundation-learning-guide/9780132652933/ch08.html "Out-of-band traffic flow is supported with the Cisco NAS connected to most common Cisco switches with recent software releases." https://

www.cisco.com/c/en/us/td/docs/security/nac/appliance/configuration_guide/47/cas/47cas-book/s_deploy.html "OOB Virtual Gateway

Recommended configuration if sharing ports between IP phones and PCs."

QUESTION 5

During an upgrade of an existing data center, a network team must design segmentation into existing networks. Due to legacy applications, the IP addresses cannot change. Which firewall deployment model meets these requirements?

A. Routed mode

B. Multicontext mode

C. Transparent mode

D. Cluster mode

Correct Answer: B

Latest 300-320 Dumps   300-320 VCE Dumps   300-320 Exam Questions

Try our product !

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket: