

300-415^{Q&As}

Implementing Cisco SD-WAN Solutions (ENSDWI)

Pass Cisco 300-415 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/300-415.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

What are the two functions of vSmart? (Choose two.)

- A. It ensures that valid WAN Edge routers can build the control plane connectivity.
- B. It validates that the WAN Edge trying to join the overlay is authorized to join.
- C. It orchestrates connectivity between WAN Edge routers using policies to create network topology.
- D. It uses TLOCs to uniquely identify the circuit interface to control plane and data plane information.
- E. It builds control plane connections with WAN Edge routers using TLS or DTLS.

Correct Answer: CE

QUESTION 2

Which policy tracks path characteristics such as loss, latency, and jitter in vManage?



- A. VPN
- B. control
- C. app-route
- D. data

Correct Answer: C

<https://www.cisco.com/c/en/us/td/docs/routers/sdwan/configuration/policies/ios-xe-17/policies-book-xe/application-aware-routing.html>

QUESTION 3

Refer to the exhibit. What does the BFD value of 8 represent?

Hostname	State	System IP	Reachability	Site ID	Device Model	BFD	Control
 BR1-VEDGE1		10.3.0.1	reachable	300	vEdge Cloud	8	5

- A. dead timer of BFD session
- B. poll-interval of BFD session
- C. hello timer of BFD session

D. number of BFD sessions

Correct Answer: D

QUESTION 4

A policy is created to influence routing in the network using a group of prefixes. What policy application will achieve this goal when applied to a site list?

A. Vpn-membership policy

B. Control-policy


C. cflowd-template

D. App-route policy

Correct Answer: B

QUESTION 5

Refer to the exhibit.

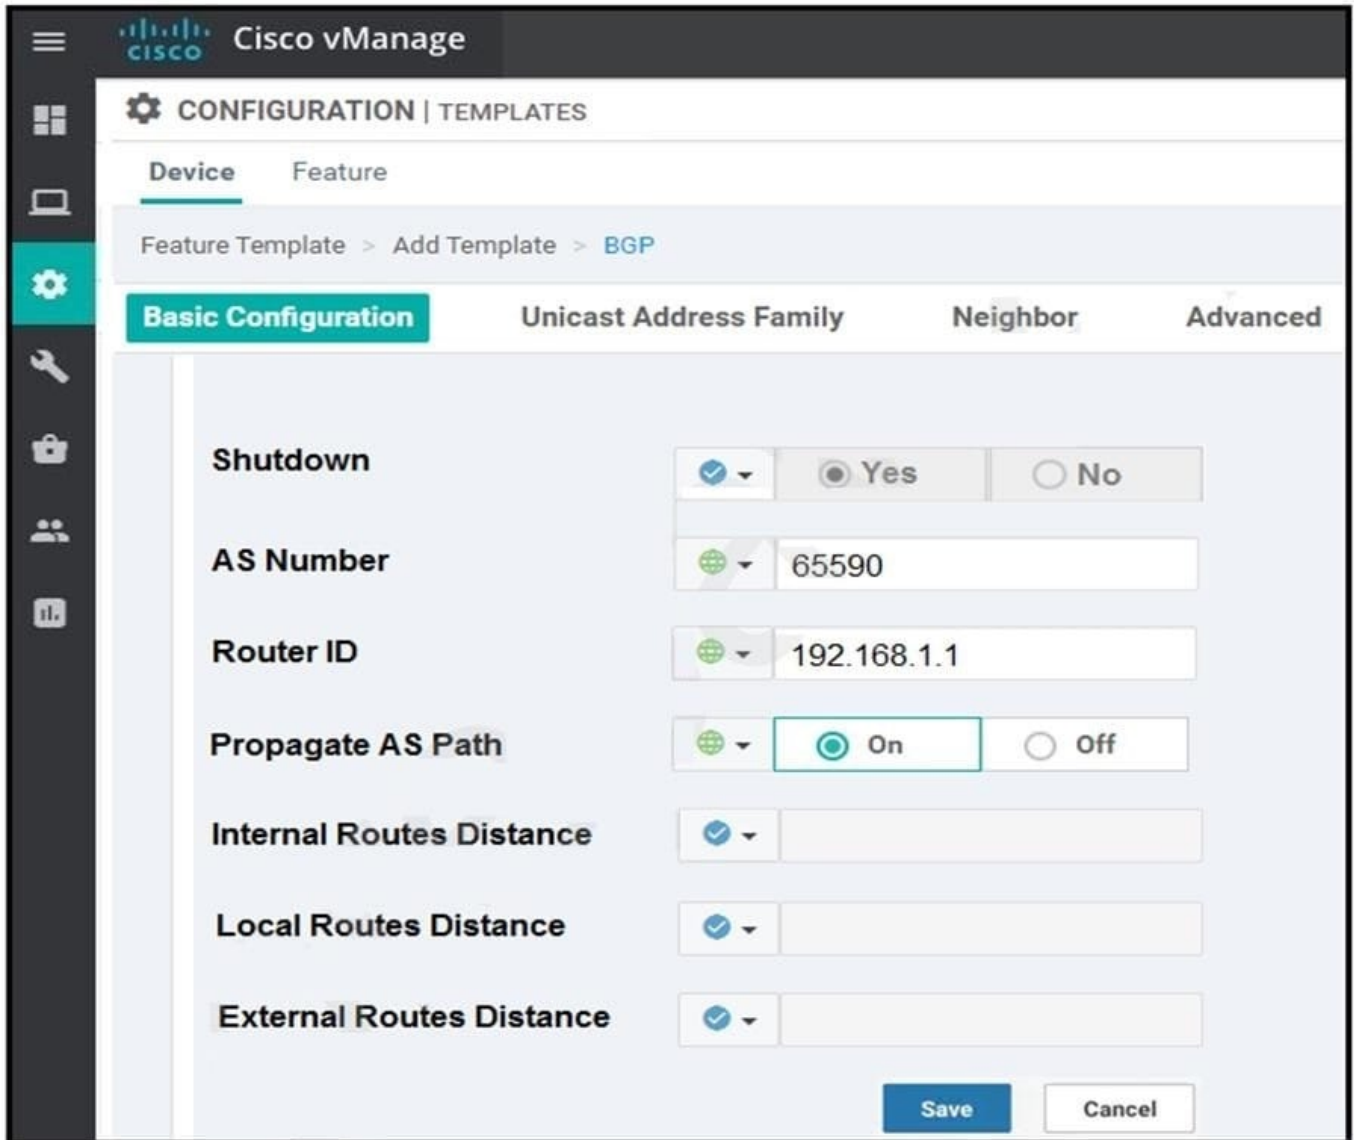

Which configuration value is used to change the administrative distance of iBGP routes to 20?

- A. Configure Internal Routes Distance to 10.
- B. Configure Propagate AS Path to off.
- C. Configure Local Routes Distance to 20.
- D. Configure External Routes Distance to 20.

Correct Answer: C

Reference: <https://www.cisco.com/c/en/us/td/docs/routers/sdwan/configuration/routing/vEdge-20-x/routing-book/m-unicast-routing.html>