

300-415^{Q&As}

Implementing Cisco SD-WAN Solutions (ENSDWI)

Pass Cisco 300-415 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/300-415.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by Cisco
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

Refer to the exhibit.

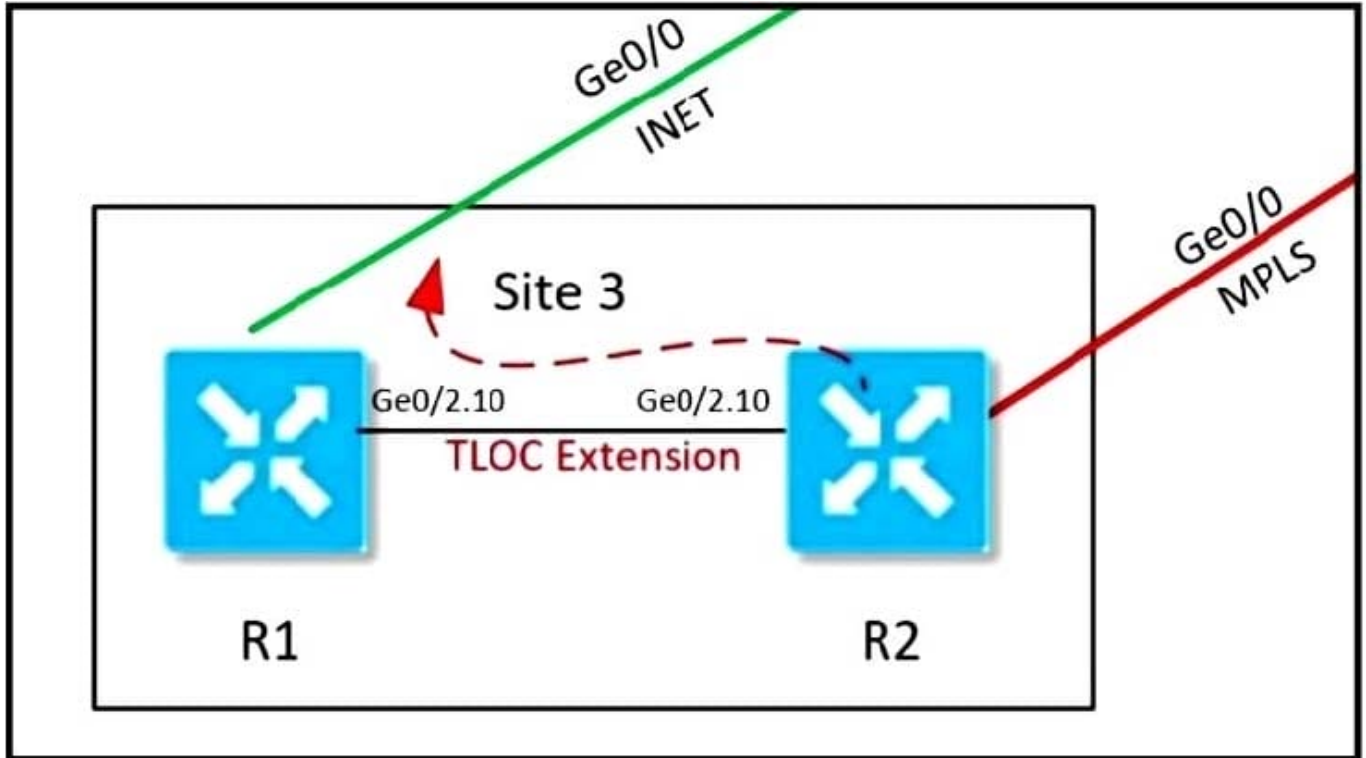

Which configuration extends the INET interface on R1 to be used by R2 for control and data connections?

A.

```
R1
interface ge0/2
no shutdown
interface ge0/2.10
ip address 43.43.43.2/30
tloc-extension ge0/0

R2
interface ge0/2
no shutdown
interface ge0/2.10
ip address 43.43.43.1/30
tloc-extension ge0/0
```

B.

```
R1
interface ge0/2
interface ge0/2.10
ip address 43.43.43.2/30
tloc-extension ge0/0
tunnel-interface
color public-internet

R2
interface ge0/2
interface ge0/2.10
ip address 43.43.43.1/30
tunnel-interface
color public-internet
```

C.

```
R1
interface ge0/2
mtu 1504
no shutdown
interface ge0/2.10
ip address 43.43.43.2/30
tloc-extension ge0/0

R2
interface ge0/2
mtu 1504
no shutdown
interface ge0/2.10
ip address 43.43.43.1/30
tunnel-interface
color public-internet
```

A. Option A

B. Option B

C. Option C

Correct Answer: C

<https://www.ciscolive.com/c/dam/r/ciscolive/us/docs/2018/pdf/BRKRST-2091.pdf>

Subinterfaces require a physical, parent interface to be defined in VPN 0, and also require the subinterface MTU to be four bytes lower than the physical interface due to the 802.1q tag. It is recommended to configure the parent physical interface for an MTU of 1504 to take care of this requirement.

QUESTION 2

Which configuration step is taken on vManage after WAN Edge list is uploaded to support the on-boarding process before the device comes online?

- A. Verify the device certificate
- B. Enable the ZTP process
- C. Set the device as valid
- D. Send the list to controllers

Correct Answer: C

Reference: <https://www.cisco.com/c/dam/en/us/td/docs/solutions/CVD/SDWAN/sd-wan-wan-edge-onboarding-deploy-guide-2020jan.pdf>

QUESTION 3

Which third-party Enterprise CA server must be used for a cloud-based vSmart controller?

- A. RootCert
- B. VeriSign
- C. Microsoft
- D. RADIUS

Correct Answer: A

Reference: <https://www.nerone.com/articles/cisco-sdwan-viptela-everything-you-wanted-to-know-about-certificates-deployment-but-were-afraid-to-ask>

QUESTION 4

Which device in the SD-WAN solution receives and categorizes event reports, and generates alarms?

- A. vSmart controllers
- B. WAN Edge routers
- C. vBond controllers
- D. vManage NMS

Correct Answer: D

https://sdwan-docs.cisco.com/Product_Documentation/vManage_Help/Release_17.1/vManage_NMS_Product_Help

QUESTION 5

An engineer must deploy a QoS policy with these requirements:

policy name: App-police police rate: 1000000 burst: 1000000 exceed: drop

Which configuration meets the requirements?

- A.

```
vpn-list VPN10
sequence 1
match
app-list youtube
action accept
set
policer App-police
```
- B.

```
policy
data-policy policy-name
vpn-list 10
sequence 1
action accept
set
policer App-police
```
- C.

```
vpn 10
interface ge0/0/0
set
policer App-police in
default action accept
```
- D.

```
policy
action accept
set
policer App-police
```

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: B

There is no "set" command under interface configuration:

```
site3-vedge01(config)# vpn 10 site3-vedge01(config-vpn-10)# interface ge0/0/0 site3-vedge01(config-interface-ge0/0/0)# set ^ % Invalid input detected at \\^\ marker.
```