

300-430^{Q&As}

Implementing Cisco Enterprise Wireless Networks (ENWLSI)

Pass Cisco 300-430 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/300-430.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1


When configuring a large, high-availability wireless network which change to a mobility group creates less load on the controllers and maintains the same mobility messages?

- A. Configure mobility group multicast messaging.
- B. Remove unnecessary controllers from the mobility group.
- C. Configure the controllers into separate RF groups from the mobility groups.
- D. Separate the controllers into different mobility groups per controller.

Correct Answer: A

QUESTION 2

Refer to the exhibit.

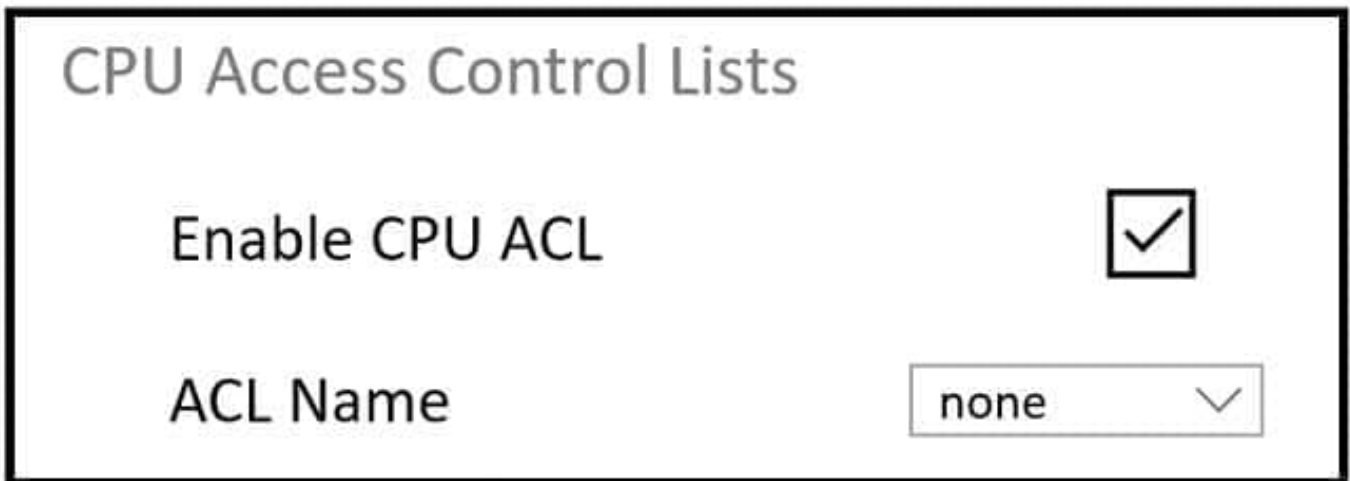

An engineer must restrict some subnets to have access to the WLC. When the CPU ACL function is enabled, no ACLs in the drop-down list are seen. What is the cause of the problem?

- A. The ACL does not have a rule that is specified to the Management interface.
- B. No ACLs have been created under the Access Control List tab.
- C. When the ACL is created, it must be specified that it is a CPU ACL.
- D. This configuration must be performed through the CLI and not through the web GUI.

Correct Answer: B

QUESTION 3

You enter the command on a Cisco Catalyst 3850 Series Switch that runs Cisco IOS XE. What does the command do?

- A. It defines the user identity or the device identity to be validated by the RADIUS server.
- B. It captures information on the length of the authorized session, as well as the bandwidth usage of the client.
- C. It defines the RADIUS server used to track which sessions are still active.
- D. It defines the level of access of the user or the device.

Correct Answer: D

QUESTION 4

A corporation has employees working from their homes. A wireless engineer must connect 1810 OEAP at remote teleworker locations. All configuration has been completed on the controller side, but the network readiness is pending. Which two configurations must be performed on the firewall to allow the AP to join the controller? (Choose two.)

- A. Block UDP ports 1812 and 1813 on the firewall.
- B. Enable NAT Address on the 5520 with an Internet-routable IP address.
- C. Configure a static IP on the OEAP 1810.
- D. Allow UDP ports 5246 and UDP port 5247 on the firewall.
- E. Allow UDP ports 12222 and 12223 on the firewall.

Correct Answer: BD

Reference:

https://www.cisco.com/c/en/us/td/docs/wireless/controller/technotes/8-3/b_Cisco_OfficeExtend_Access_Point_.pdf

QUESTION 5

An engineer has successfully implemented 10 active RFID tags in an office environment. The tags are not visible when the location accuracy is tested on the Cisco CMX Detect and Locate window. Which setting on Cisco CMX allows the engineer to view the tags?

- A. Enable hyper location services for RFID.
- B. Enable RFID tags in tracking options
- C. Enable probing clients for active tags.
- D. Define an RFID group globally and add the tags.

Correct Answer: B

[300-430 Practice Test](#)

[300-430 Exam Questions](#)

[300-430 Braindumps](#)