

300-430^{Q&As}

Implementing Cisco Enterprise Wireless Networks (ENWLSI)

Pass Cisco 300-430 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/300-430.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

The security policy mandates that only controller web management traffic is allowed from the IT subnet. In testing, an engineer is trying to connect to a WLAN with Web Authentication for guest users, but the page is timing out on the wireless

client browser.

What is the cause of this issue?

- A. Web Authentication Redirect is supported only with Internet Explorer, and the client is using Google Chrome.
- B. The DNS server that is configured on the controller is incorrect
- C. Web Authentication Redirect is not supported with CPUACLs. QUE
- D. The implemented CPU ACL on the controller is blocking HTTP/HTTPS traffic from the guest clients.

Correct Answer: D

QUESTION 2

Where is a Cisco OEAP enabled on a Cisco Catalyst 9800 Series Wireless Controller?


- A. RF Profile
- B. Flex Profile
- C. Policy Profile
- D. AP Join Profile

Correct Answer: B

https://www.cisco.com/c/en/us/td/docs/wireless/controller/9800/configguide/b_wl_16_10_cg/flex_connect.html

QUESTION 3

Refer to the exhibit.

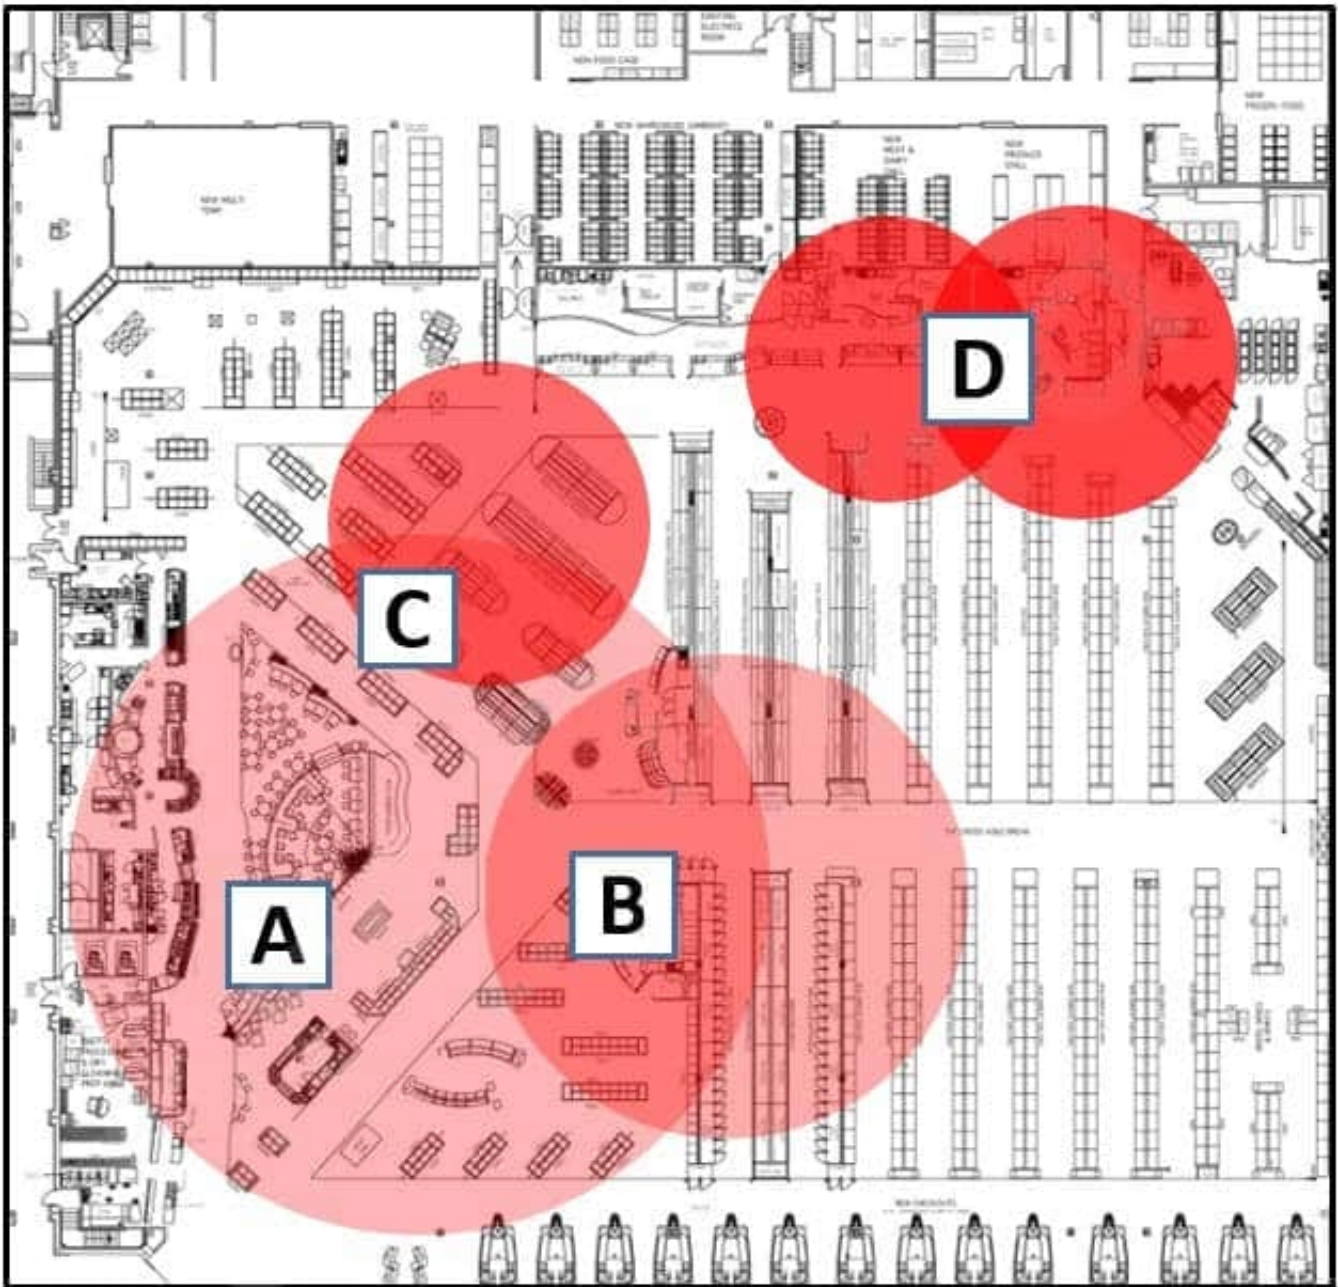

Which area indicates the greatest impact on the wireless network when viewing the Cisco CleanAir Zone of Impact map of interferers?

- A. A
- B. B
- C. C
- D. D

Correct Answer: D

QUESTION 4

Refer to the exhibit.

Seq	Action	Source IP/Mask	Destination IP/Mask	Protocol	Source Port	Dest Port	DSCP	Direction
1	Deny	0.0.0.0 / 0.0.0.0	10.0.0.5 / 255.255.255.255	TCP	Any	HTTPS	Any	Any
2	Deny	0.0.0.0 / 0.0.0.0	10.0.0.5 / 255.255.255.255	TCP	Any	22	Any	Any

Interface Name	VLAN Identifier	IP Address	Interface Type	Dynamic AP Management
management	100	10.0.0.5	Static	Enabled
service-port	N/A	10.0.1.20	DHCP	Disabled
virtual	N/A	192.0.2.100	Static	Not Supported

An engineer implemented the CPU ACL on your Cisco 5520 Series Wireless LAN Controller, and the controller is no longer manageable via the network. What must be changes on this CPU ACL to enable it to manage the controller again?

- A. Line 1 must be set to a destination port of HTTP
- B. Permit statements must be added to the top of the ACL in both directions, which specify the network to be managed from and the virtual interface of the controller.
- C. Line 1 must be set to the inbound direction. 2
- D. Permit statements must be added to the top of the ACL, which specify the network to be managed from

Correct Answer: B

QUESTION 5

An engineer must use Cisco AVC on a Cisco WLC to prioritize Cisco IP cameras that use the wireless network. Which element do you configure in a rule?

- A. permit-ACL
- B. WMM required
- C. mark
- D. rate-limit

Correct Answer: C

https://www.cisco.com/c/en/us/td/docs/wireless/controller/technotes/8-8/AVC_8point8_dg.html

[Latest 300-430 Dumps](#)

[300-430 Study Guide](#)

[300-430 Braindumps](#)