

# 300-625<sup>Q&As</sup>

Implementing Cisco Storage Area Networking (DCSAN)

## Pass Cisco 300-625 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/300-625.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco  
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

Which two protocols are used to implement SAN telemetry on Cisco MDS switches? (Choose two.)

- A. RPC transport
- B. GPB transport
- C. gRPC transport
- D. gRPC encoding
- E. GPB encoding

Correct Answer: CE

---

**QUESTION 2**

A storage administrator is enabling DH-CHAP for the first time on a Fibre Channel fabric. Which condition must the administrator consider while configuring this feature?

- A. NTP must be configured on all devices or the configuration fails.
- B. The MD5 hash must be used if TACACS+ or RADIUS authentication for FCSP is enabled.
- C. All switches on the fabric must be configured for the same password.
- D. Enabling DH-CHAP protocol feature is unsupported on FCIP interfaces.

Correct Answer: B

---

**QUESTION 3**

Refer to the exhibit.

**Switch 1**

```
Ivr nat
ivr vsan-topology auto
ivr service-group name GROUP1
autonomous-fabric-id 100 vsan-ranges 1-3, 100
autonomous-fabric-id 1 switch 20:00:00:05:31:11:32:ac vsan-ranges 1
autonomous-fabric-id 1 switch 20:00:00:05:40:12:1e:dd vsan-ranges 1-3
```

**Switch 2**

```
ivr vsan-topology auto
ivr service-group name GROUP2
autonomous-fabric-id 100 vsan-ranges 1, 6-7, 200
autonomous-fabric-id 1 switch 20:00:00:05:31:11:32:ac vsan-ranges 1
autonomous-fabric-id 1 switch 20:00:00:05:40:12:1e:dd vsan-ranges 6-7
```


What is the result of merging the fabric?

- A. The merged fabric IVR VSAN topology is set to activate.
- B. The merged fabric has NAT enabled.
- C. The merge is invalid.
- D. The merged fabric contains only service group Group1.

Correct Answer: D

**QUESTION 4**

Refer to the exhibit.

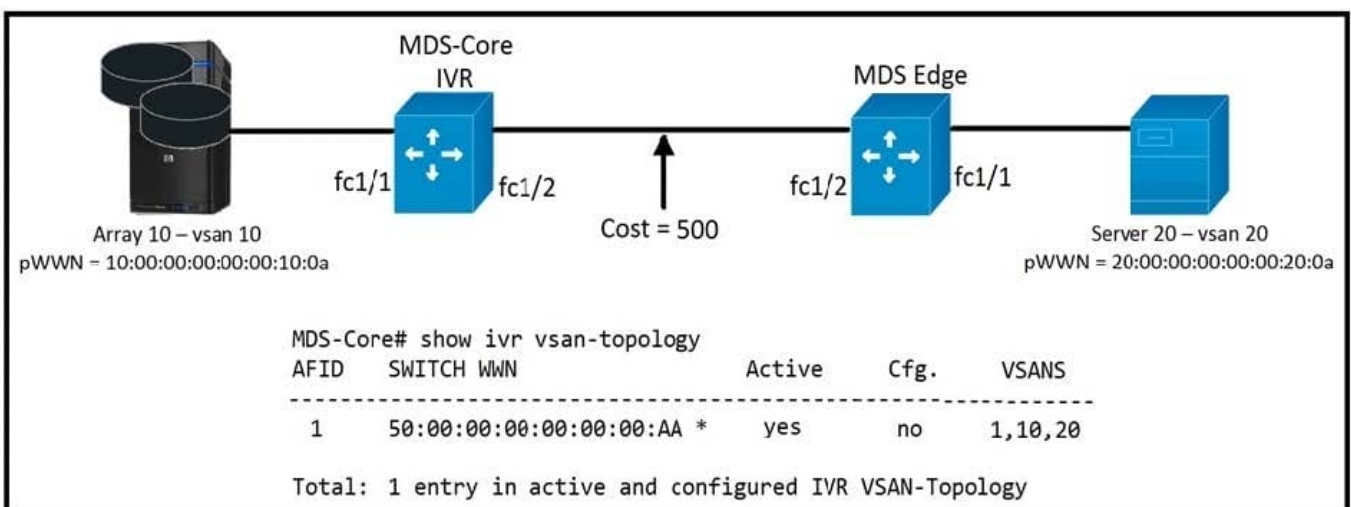

An engineer is configuring Inter-VSAN routing for two Cisco MDS switches. The FSPF cost between the switches is 500, and the Cisco MDS core virtualizes an IVR NAT domain as shown. Which statement about the topology is correct?

- A. The MDS-Core simulates an IVR NAT, and the FSPF cost is 500.

- B. The MDS-Core simulates an IVR NAT, and increases the cost to 501.
- C. The MDS-Core simulates an IVR NAT, and decreases the cost to 400.
- D. The MDS-Core simulates an IVR NAT, and increases the cost to 600.

Correct Answer: B

---

#### QUESTION 5

A Cisco MDS Series Switch with the POAP feature boots and does not find the startup configuration. Which location is checked first when the switch enters POAP mode?

- A. USB device that contains the software image files and the switch configuration file
- B. DHCP server to bootstrap the interface IP address, gateway, DNS server, and TFTP IP addresses
- C. TFTP server where the necessary configuration files are downloaded
- D. HTTP server where the URL is used to download the software image

Correct Answer: A

[300-625 Practice Test](#)

[300-625 Exam Questions](#)

[300-625 Braindumps](#)