

350-601 Q&As

Implementing and Operating Cisco Data Center Core Technologies
(DCCOR)

Pass Cisco 350-601 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/350-601.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

Refer to the exhibit.

```
CISCO-UCS-A# scope org /
CISCO-UCS-A /org* # create service-profile Cisc01 instance
CISCO-UCS-A /org/service-profile* # set bios-policy bios1
CISCO-UCS-A /org/service-profile* # set boot-policy boot1
CISCO-UCS-A /org/service-profile* # set ext-mgmt-ip-state none
CISCO-UCS-A /org/service-profile* # set host-fw-policy ipmi-user987
CISCO-UCS-A /org/service-profile* # set identity dynamic-uuid derived
CISCO-UCS-A /org/service-profile* # set ipmi-access-profile ipmi1
CISCO-UCS-A /org/service-profile* # set local-disk-policy local1
CISCO-UCS-A /org/service-profile* # set maint-policy maint1
CISCO-UCS-A /org/service-profile* # set mgmt-fw-policy mgmt1
CISCO-UCS-A /org/service-profile* # set power-control-policy power1
CISCO-UCS-A /org/service-profile* # set scrub-policy scrub1
CISCO-UCS-A /org/service-profile* # set sol-policy sol1
CISCO-UCS-A /org/service-profile* # set stats-policy stats1
CISCO-UCS-A /org/service-profile* # set user-label Cisco
CISCO-UCS-A /org/service-profile* # vcon-policy vconnpolicy
CISCO-UCS-A /org/service-profile* # commit-buffer
CISCO-UCS-A /org/service-profile #
```

What is a characteristic presented in the service profile of the UUID?

- A. based on the hardware
- B. vendor assigned
- C. unique system generated
- D. allocated from a UUID pool

Correct Answer: A

There is no parameter for `set identity dynamic-uuid` to specify a pool name-you can only state "derived" or a 32 hex character string (128-bits, therefore full UUID). `ucspe /org/service-profile # set identity dynamic-uuid derived` Derived FFFFFFFF-FFFF-FFFF-FFFF-FFFFFFFFFFFFFF Dynamic UUID The documentation, as usual for Cisco, is poor. Shagya references old v1.4.1 documentation but it's the same in 4.1. It's inaccurate as `uuid-pool` should now read `uuid-suffix-pool`. You can use UCSPE to check the CLI with contextual help. `ucspe /org/service-profile # set identity dynamic-uuid` Dynamic UUID dynamic-wwnn Dynamic WWNN `uuid-suffix-pool` UUID Suffix Pool `wwnn-pool` WWNN Pool If `set identity dynamic-uuid` only gives us the option of a static UUID or the parameter "derived", and `set identity uuid-suffix-pool` is the option to assign a pool... I would suggest that the most logical answer here is -derived from the hardware. https://www.cisco.com/en/US/docs/unified_computing/ucs/sw/cli/config/guide/1.4.1/CLI_Config_Guide_1_4_1_chapter27.html

QUESTION 2

An engineer must create a scheduler configuration to create two backup jobs per day. The backup file must be copied to a server in the operations VRF. Which configuration accomplishes this task?

- A. scheduler schedule name CNFGBACKUP
job name BACKUP-JOB
copy running-config tftp://10.19.11.12/\$(SWITCHNAME)-\$(TIMESTAMP).cfg vrf operations
time start now repeat 12:00
- B. scheduler schedule name CNFGBACKUP
job name BACKUP-JOB
show tech-support | redirect vrf operations tftp://10.19.11.12/\$(SWITCHNAME)-\$(TIMESTAMP).cfg
time start daily 12:30 0:30
- C. scheduler schedule name CNFGBACKUP
job name BACKUP-JOB
copy startup-config tftp://10.19.11.12/\$(SWITCHNAME)-\$(TIMESTAMP).cfg
time daily 12:30 0:30
- D. scheduler schedule name CNFGBACKUP
job name BACKUP-JOB
copy vrf operations config tftp://10.19.11.12/\$(SWITCHNAME)-\$(TIMESTAMP).cfg
time start 12:30 repeat 12

A. Option A

B. Option B


C. Option C

D. Option D

Correct Answer: A

QUESTION 3

Refer to the exhibit.

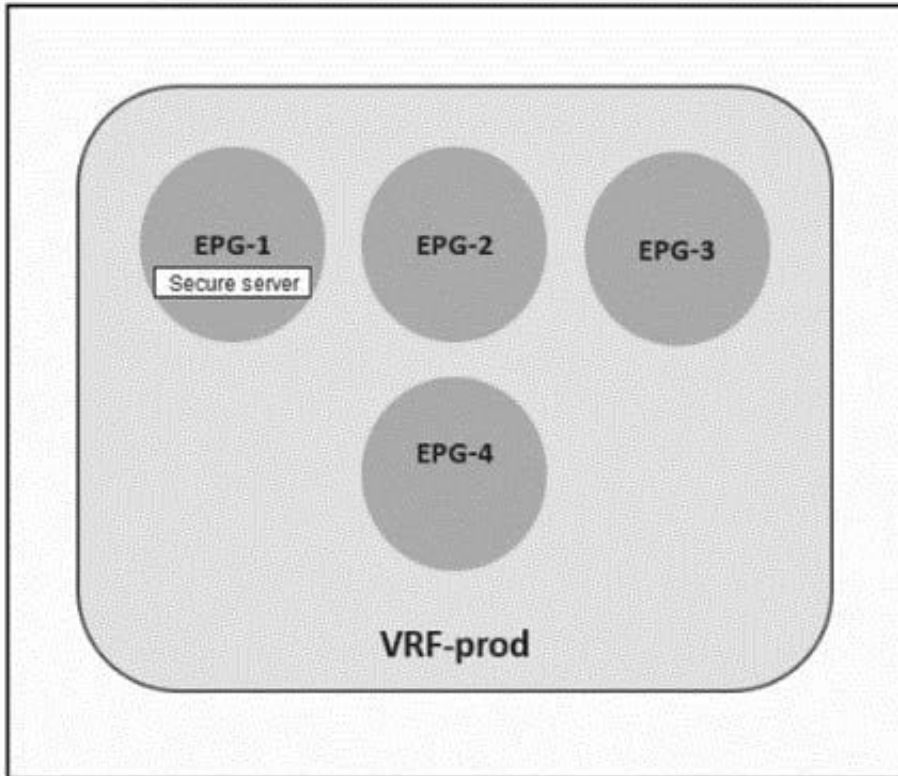

A secure server that provides services to EPG-2 must be placed in EPG-1. The remaining EPGs--EPG-2, EPG-3, and EPG-4--must communicate without any contracts. Which set of actions accomplishes this goal?

- Exclude EPG-2, EPG-3, and EPG-4 from the preferred group.
Configure a contract between EPG-2 and EPG-3.
- Include EPG-2, EPG-3, and EPG-4 in the preferred group.
Configure a contract between EPG-1 and EPG-2.
- Include EPG-1 and EPG-2 in the preferred group.
Configure a contract between EPG-2 and EPG-3.
- Exclude EPG-2, EPG-3, and EPG-4 from the preferred group.
Configure a contract between EPG-1 and EPG-3.

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: B

QUESTION 4

An engineer is seeking the most optimal on demand CPU performance while configuring the BIOS settings of UCS C-

series rack mount server.

- A. C0/C1 state
- B. C6 Retention
- C. C2 state
- D. C6 non-Retention

Correct Answer: A

https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/c/sw/gui/config/guide/4_0/b_Cisco_UCS_C-Series_GUI_Configuration_Guide_for_S3260_Servers_40/b_Cisco_UCS_CSeries_GUI_Configuration_Guide_for_S3260_Servers_40_appendix_010011.html

QUESTION 5

An engineer must build a lab replica of a Cisco UCS production environment. The file must be imported into a new Cisco UCS cluster using a Cisco UCS manager GUI. The file must be in XML format and be exported from Cisco UCS Manager using encrypted method.

Which two configuration parameters should be selected to meet these requirements?. (Choose two.)

- A. Type: Logical configuration
- B. Protocol SCP
- C. Type Full state
- D. Protocol TFTP
- E. Type All configuration

Correct Answer: BE

[Latest 350-601 Dumps](#)

[350-601 PDF Dumps](#)

[350-601 Braindumps](#)