

# 350-801<sup>Q&As</sup>

Implementing and Operating Cisco Collaboration Core Technologies (CLCOR)

## Pass Cisco 350-801 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass2lead.com/350-801.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center


- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers





### **QUESTION 1**

Refer to the exhibit.

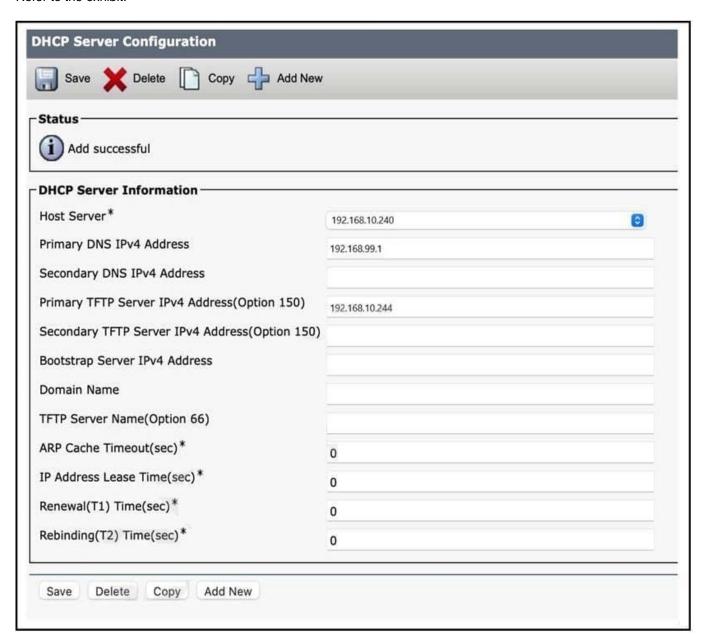

An administrator configured a codec preference list with 0,122 and ILBC codecs. Which change must the administrator make in the dial-peer section of the configuration to use this list?

- A. add voice-codecs 20
- B. add session codec 20
- C. add codec preference 20
- D. add voice-class codec 20



https://www.pass2lead.com/350-801.html 2024 Latest pass2lead 350-801 PDF and VCE dumps Download

Correct Answer: D
QUESTION 2
Which IP precedence value maps to DSCP EF?
A. 0
B. 1
C. 3
D. 5
Correct Answer: D
QUESTION 3
A collaboration engineer troubleshoots issues with a Cisco IP Phone 7800 Series. The IPv4 address of the phone is reachable via ICMP and HTTP, and the phone is registered to Cisco UCM. However, the engineer cannot reach the CL of the phone. Which two actions in Cisco UCM resolve the issue? (Choose two.)
A. Enable Settings Access under Product Specific Configuration Layout in Cisco UCM.
B. Enable FIPS Mode under Product Specific Configuration Layout in Cisco UCM.
C. Enable SSH Access under Product Specific Configuration Layout in Cisco UCM.
D. Set a username and password under Secure Shell Information in Cisco UCM.
E. Disable Web Access under Product Specific Configuration Layout in Cisco UCM.
Correct Answer: CD
Enable ssh for phone, and then setup username and password so that engineer can login to phone via CLI
QUESTION 4

Refer to the exhibit.



- A. in the Called Party Transformation Pattern Configuration section, configure the Pattern as 9.011841234567 configure the Discard Digits as Predot
- B. in the Calling Party Transformation Patterns section, configure the Pattern as 9.011841234567 configure the Discard Digits as Predot 10-10-Dialing
- C. in the Called Party Transformation Pattern Configuration section, configure the Pattern as 9.011841234587 configure the Discard Digits as Predot 10-10-Dialing
- D. in the Calling Party Transformation Patterns section, configure the Pattern as a 011841234557 configure the Discard Digits as Predot

What is a possible cause of the PRI issue?

- A. The cable is unplugged.
- B. The clock source is incorrect.
- C. The controller shut down.
- D. The framing is configured incorrectly.

Correct Answer: D

### **QUESTION 5**

An engineer must configure a route pattern that can route all +E.164 globalized international numbers for the plans of all countries. Which Cisco UCM configuration accomplish this task?

User's phone has:

Line level CSS which contains Partition\_A

Device level CSS which contains Partition B

Configured Route Patterns:

2XXX in Partition\_A set to block call 21XX in Partition B set to route call

- A. Option A
- B. Option B



## https://www.pass2lead.com/350-801.html 2024 Latest pass2lead 350-801 PDF and VCE dumps Download

C. Option C

D. Option D

Correct Answer: D

Latest 350-801 Dumps

350-801 PDF Dumps

350-801 Study Guide