400-151 Q&As

CCIE Data Center Written

Pass Cisco 400-151 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass4lead.com/400-151.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco Official Exam Center

Instant Download After Purchase
100% Money Back Guarantee
365 Days Free Update
800,000+ Satisfied Customers

QUESTION 1

```
admin@SYD-Fab1:~> acidiag fnvread
    ID       Name     Serial Number     IP address        Role     State            LastUpdMsgId
-------------------------------------------------------------------------------------------------
    0                 SAL12345678       0.0.0.0           unknown  unsupported      0
```

Refer to the exhibit. An admin wants to bring online a new leaf node into their ACI fabric. Before registering the leaf node, the admin checks the current status and sees this output. Which option is the reason for the admin to see this output?

A. The DHCP server running on the APIC has failed and thus the leaf node not been able toobtain an IP address.

B. The leaf node is yet to be physically connected to the fabric.

C. This output is expected until the admin registers the leaf node with an ID and name.

D. This output is expected until the admin registers the leaf node and assigns it a role.

E. The wrong catalog firmware is running on the APIC.

Correct Answer: E

QUESTION 2

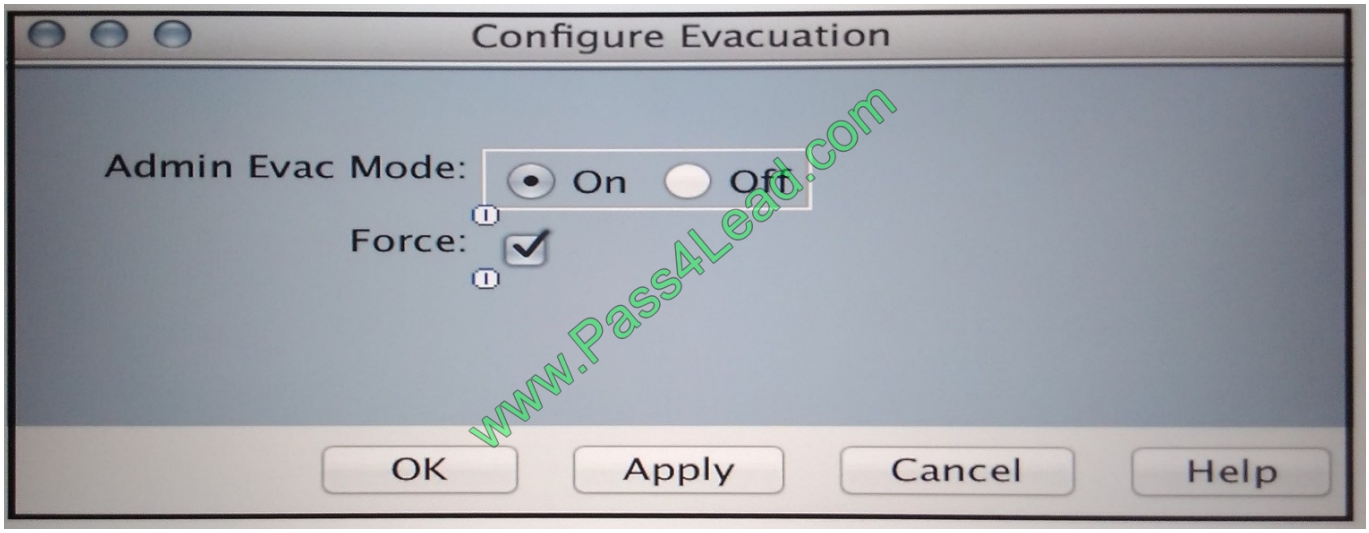

Refer to the exhibit. Which outcome of this configuration is true?

A. Any newly created trafficflows do not use this fabric interconnect.

B. Servers cease to use this fabric interconnect upon next reboot.

C. All traffic ceases to flow through this fabric interconnect after a reboot.

D. All traffic ceases to flow through this fabric interconnect.

Correct Answer: D

QUESTION 3

Which two cluster interface types are valid when integrating a Layer 4 ?Layer 7 device in an ACI Fabric? (Choose two.)

A. control

B. outside

C. provider

D. consumer

E. inside

Correct Answer: CD

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/L4-L7_Services_Deployment/b_L4L7_Deploy_ver222/b_L4L7_Deploy_ver221_chapter_010100.html

QUESTION 4

What is SD-Access LAN Automation?

A. LAN Automation configures the fabric overlay using NETCONF and SNMP

B. LAN Automation configures the fabric overlay using Cisco Plug and Play

C. LAN Automation configures the fabric underlay using NETCONF and SNMP

D. LAN Automation configures the fabric underlay using Cisco Plug and Play

Correct Answer: D

QUESTION 5

Cisco UCS Director provides an option to offer the report metadata and Rest API Browser for developers. Which configuration step is needed in Cisco UCS Director to enable this feature?

A. Enable report metadata.

B. Enable the REST API.

C. Enable the developer menu.

D. Enable the debugging menu.

Correct Answer: C

Latest 400-151 Dumps 400-151 VCE Dumps 400-151 Practice Test

To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications.
You can view Vendor list of All Certification Exams offered:

https://www.pass4lead.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket:

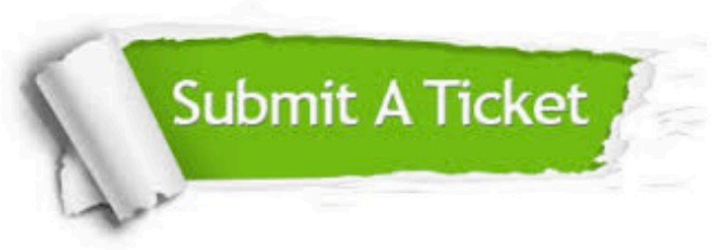

Any charges made through this site will appear as Global Simulators Limited.
All trademarks are the property of their respective owners.
Copyright © pass4lead, All Rights Reserved.