500-220 Q&As

Cisco Meraki Solutions Specialist

Pass Cisco 500-220 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass2lead.com/500-220.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco Official Exam Center

QUESTION 1

Refer to the exhibit. During a Meraki AP deployment, the default SSID that the exhibit shows is broadcast. What causes this behavior?

A. An AP does not have a wired connection to the network.

B. An AP cannot connect to the default gateway.

C. An AP has never connected to the Meraki Cloud Controller.

D. An AP has Site Survey mode enabled.

Correct Answer: B

Reference: https://documentation.meraki.com/MR/Other_Topics/Troubleshooting_local_connection_issues_using_defau lt_SSID_on_MR_Access_Points

QUESTION 2

In an organization that uses the Co-Termination licensing model, which two operations enable licenses to be applied? (Choose two.)

A. Renew the Dashboard license.

B. License a network.

C. License more devices.

D. Call Meraki support.

E. Wait for the devices to auto-renew.

Correct Answer: AC

Reference: https://documentation.meraki.com/General_Administration/Licensing/Meraki_Co-Termination_Licensing_Overview
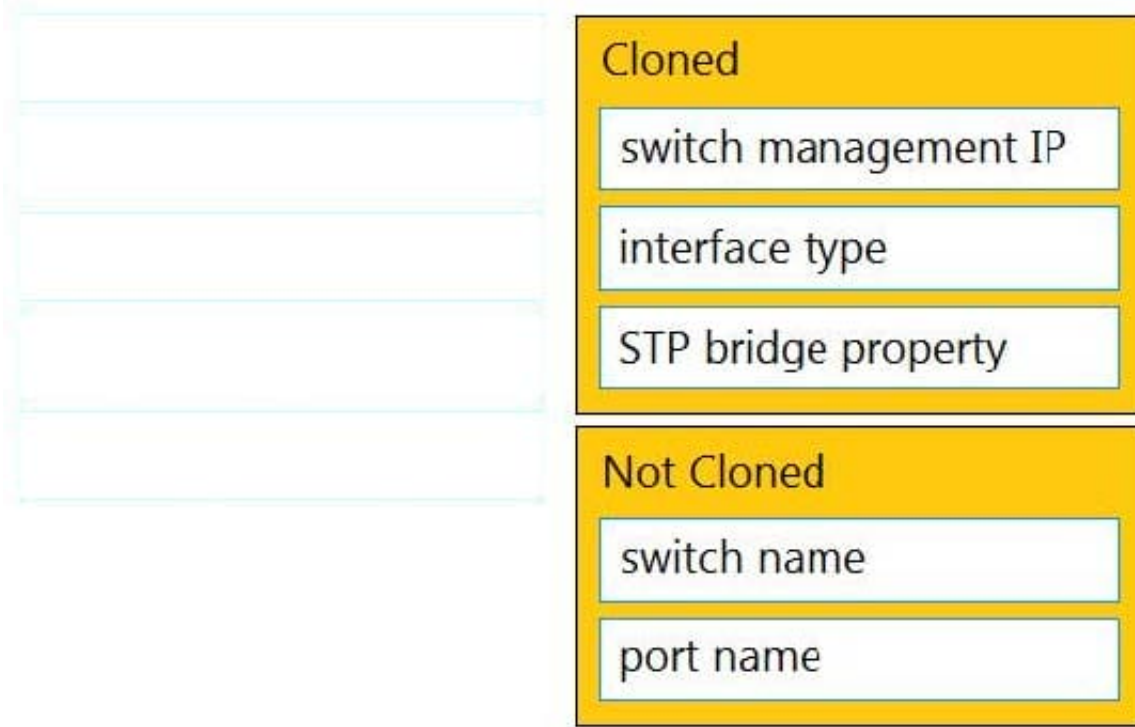
QUESTION 3

DRAG DROP

Drag and drop the settings from the left into the boxes on the right to indicate if the setting will be cloned or not cloned using the Cisco Meraki MS switch cloning feature.

Select and Place:

Correct Answer:

![Pass2Lead logo](https://Pass2Lead.com)

```
Cloned
   switch management IP
   interface type
   STP bridge property

Not Cloned
   switch name
   port name
```

QUESTION 4

Which Cisco Meraki product must be deployed in addition to Systems Manager so that Systems Manager Sentry enrollment can be used?

A. MS Switch

B. Meraki Insight

C. MR Access Point

D. MV Smart Camera

Correct Answer: C

Reference: https://meraki.cisco.com/blog/tag/systems-manager/page/4/

QUESTION 5

When an SSID is configured with Sign-On Splash page enabled, which two settings must be configured for unauthenticated clients to have full network access and not be allow listed? (Choose two.)

A. Controller disconnection behavior

B. Captive Portal strength

C. Simultaneous logins

D. Firewall and traffic shaping

E. RADIUS for splash page settings

Correct Answer: AB

Reference: https://documentation.meraki.com/MR/Access_Control

Latest 500-220 Dumps   500-220 Practice Test   500-220 Exam Questions