Pass2Lead
https://Pass2Lead.com

5V0-21.20 Q&As

VMware Certified Master Specialist (HCI 2020)

Pass VMware 5V0-21.20 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass2lead.com/5v0-21-20.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by VMware
Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update

⚙ **800,000+** Satisfied Customers

QUESTION 1

An architect has been asked to plan the impact of a storage policy change to one of the production All-Flash based vSAN datastores. The change will reduce the failures to tolerate value from 2 to 1 for objects with a RAID-1 (Mirroring) layout in the existing policy. This change will be applied to multiple VMs.
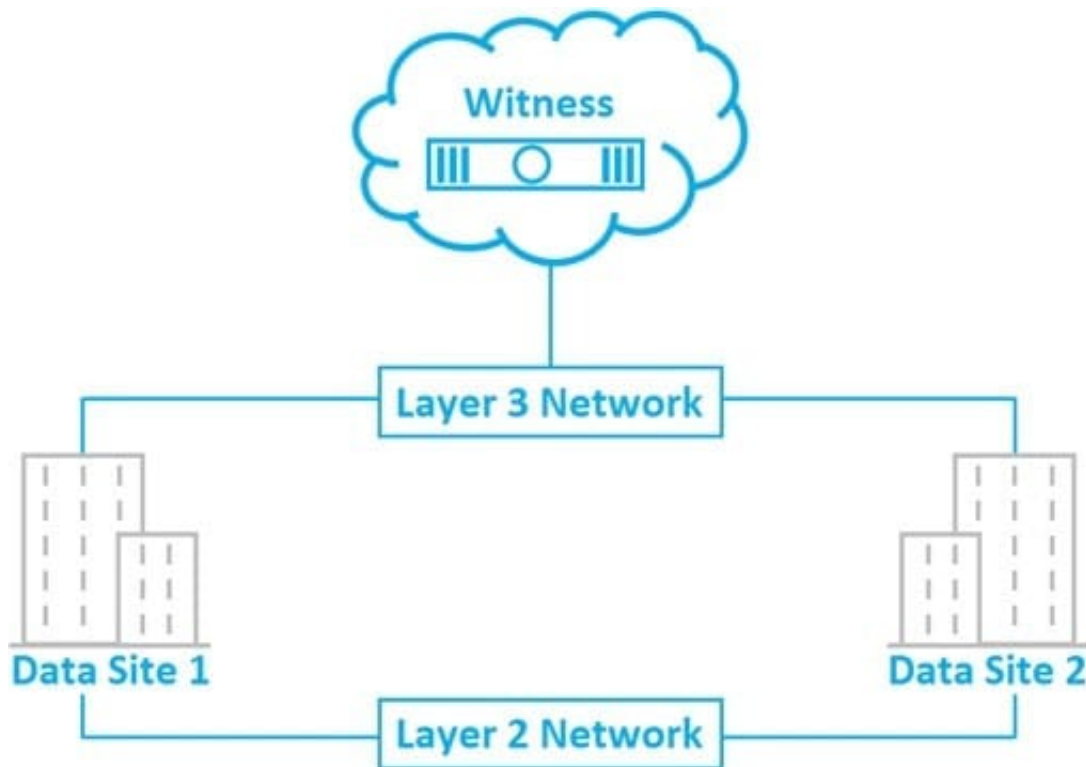
Which statement is correct in this scenario?

A. FTT-2 requires another change to apply a RAID-6 configuration.

B. The policy will need to be recreated and applied with an additional tag.

C. There will be no objects rebuilt that impact performance.

D. There will be an object rebuild impact on performance.

Correct Answer: D

QUESTION 2

Refer to the exhibit.

A vSAN Cluster stretched across Data Site 1 and Data Site 2 has a vSAN data network configured with an MTU of 9000. The witness node has been placed in a remote site across a WAN with an MTU of 1500. The vSAN health check, \\'vSAN: MTU check (ping with large packet size)\\', reports a failed ping.

What two actions could resolve the issue? (Choose two.)

![Pass2Lead logo](https://Pass2Lead.com)
A. Reduce the MTU from 9000 to 1500 on all vSAN VMkernel interfaces.

B. Reconfigure the VLAN of the witness traffic to be identical to data nodes.

C. Configure proper routing from data sites to the witness across the WAN.

D. Reconfigure WAN link to support an MTU of 9000.

E. Stretch L2 traffic from WAN to both data sites.

Correct Answer: AD

Reference: https://kb.vmware.com/s/article/2141733

QUESTION 3

The Cloud Native Storage control plane in vSphere allows an administrator to provision storage directly from which cloud technology?

A. Kubernetes Clusters

B. vRealize Automation

C. Docker nodes

D. AWS EC2 instances

Correct Answer: A

QUESTION 4

Refer to the exhibit.

There are three hosts in a vSAN cluster. All virtual machines in the cluster are assigned a storage policy with failures to tolerate set to 1 failure ?RAID-1 (Mirroring).

What is the result of placing a host in maintenance mode using the options shown in the image?

A. The host will enter maintenance mode. A reduced redundancy warning is displayed.

B. The host will not enter maintenance mode. The administrator is prompted to select a different data migration option.

C. The host will not enter maintenance mode. A general vSAN error is reported.

D. The host will enter maintenance mode. All powered-off and suspended VMs are migrated to other hosts.

Correct Answer: B

QUESTION 5

An administrator wants to orchestrate the update of the controller driver and firmware in a vSAN cluster.

Which is a required step when using VMware vSphere Update Manager and vSAN Health Service to perform the updates?

A. Upload an OEM provided vSphere ISO.

B. Install a vendor tool for the controller.

C. Manually create a vSAN system baseline.

D. Ensure all controllers are in pass-through mode.

Correct Answer: C

Reference: https://docs.vmware.com/en/VMware-vSphere/6.7/com.vmware.vsphere.update_manager.doc/GUID-6906DCFA-F4A4-4A67-A86D-2F56AB0B3B38.html

---

[5V0-21.20 PDF Dumps](#)   [5V0-21.20 VCE Dumps](#)   [5V0-21.20 Braindumps](#)