

5V0-41.20^{Q&As}

VMware SD-WAN Troubleshoot

Pass VMware 5V0-41.20 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/5v0-41-20.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by VMware
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers




QUESTION 1

Scenario 3:

After resolving numerous connectivity issues throughout the various branch sites, connectivity between applications and users is finally present. The network administrator is informed that during certain tests, applications are not performing as they are expected to. Users report that call quality has not fully improved and that some of their calls either drop or have poor voice quality where the conversation is breaking up. Other users are noticing that file transfers are slower than expect. A group of users from a few sites have reported slowness in accessing internal and external applications.

Exhibit.

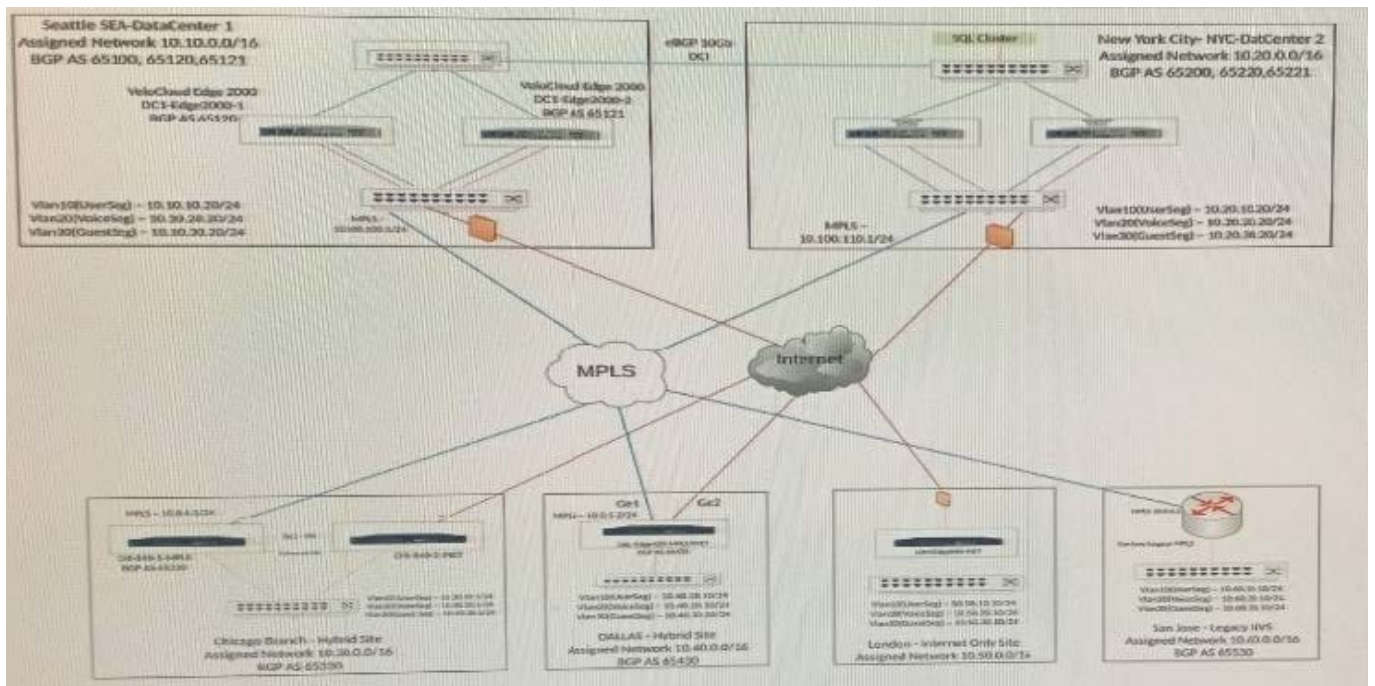

A network administrator wants to achieve better high-availability and network reconvergence between LAN-side BGP Networks and the hub Edges in New York.

What must the administrator do?

- A. Modify the Keep Alive and Hold timers to the lowest possible values ensuring the Hold timer is 3 times more than the Keep Alive timer.
- B. Nothing, the system will auto-rebalance connections and will provide sub-second convergence.
- C. Modify the Connect and Hold timers to the lowest possible values ensuring the Hold timer is 3 times more than the Connect timer.
- D. Modify the Keep Alive and Hold timers to the lowest possible values ensuring the Keep Alive timer is 3 times more than the Hold timer.

Correct Answer: B


QUESTION 2

Scenario 3:

After resolving numerous connectivity issues throughout the various branch sites, connectivity between applications and users is finally present. The network administrator is informed that during certain tests, applications are not performing as they are expected to.

Users report that call quality has not fully improved and that some of their calls either drop or have poor voice quality where the conversation is breaking up. Other users are noticing that file transfers are slower than expect. A group of users from a few sites have reported slowness in accessing internal and external applications.

Exhibit.

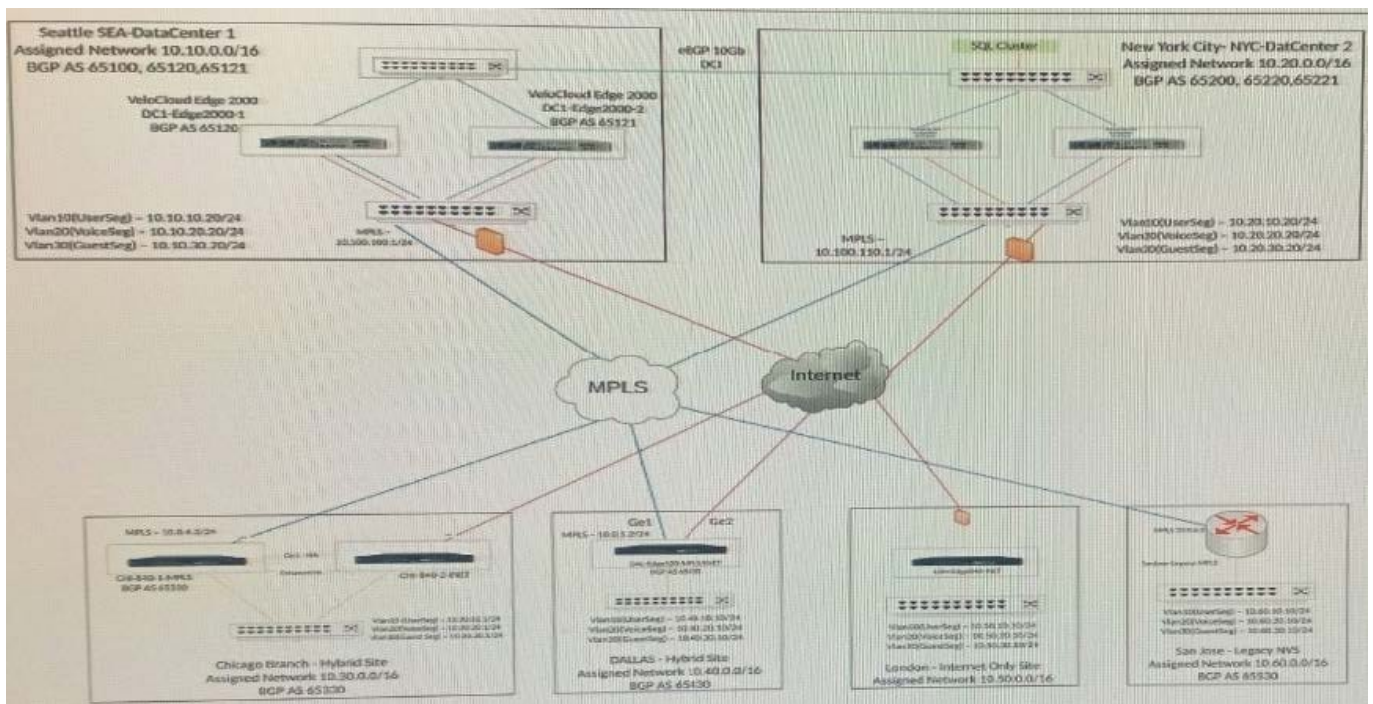

Users are complaining that web pages to certain web sites are very slow to load and at times unresponsive. The network administrator has verified that the traffic is going correctly out the underlay.

What should the administrator check next?

- A. Verify if Path-MTU Discovery is disabled.
- B. Verify if there is latency, loss, or jitter on the underlay.
- C. Verify the Business Policy flows are matching.
- D. Verify if routes to Gateways are present in the Overlay Flow Control (OFC).

Correct Answer: A

QUESTION 3


Scenario 3: After resolving numerous connectivity issues throughout the various branch sites, connectivity between applications and users is finally present. The network administrator is informed that during certain tests, applications are not performing as they are expected to. Users report that call quality has not fully improved and that some of their calls either drop or have poor voice quality where the conversation is breaking up. Other users are noticing that file transfers are slower than expect. A group of users from a few sites have reported slowness in accessing internal and external applications.


Users at multiple branches complain that a highly performant SQL Database cluster residing at the New York Data Center is not responding to database queries or inserts as expected. It is affecting the order management site. A network administrator investigates and finds that traffic from the branches are going through Seattle to reach the SQL Cluster in New York. The design for this SD-WAN network does not call for routing security.

The SQL Cluster is reachable through either Data Center, but for performance reasons, must flow through the New York DC. The network administrator has verified that the routes are not present in the OFC and the BGP neighborship is down in Network Services.

Refer to the Exhibit(s).

Exhibit.

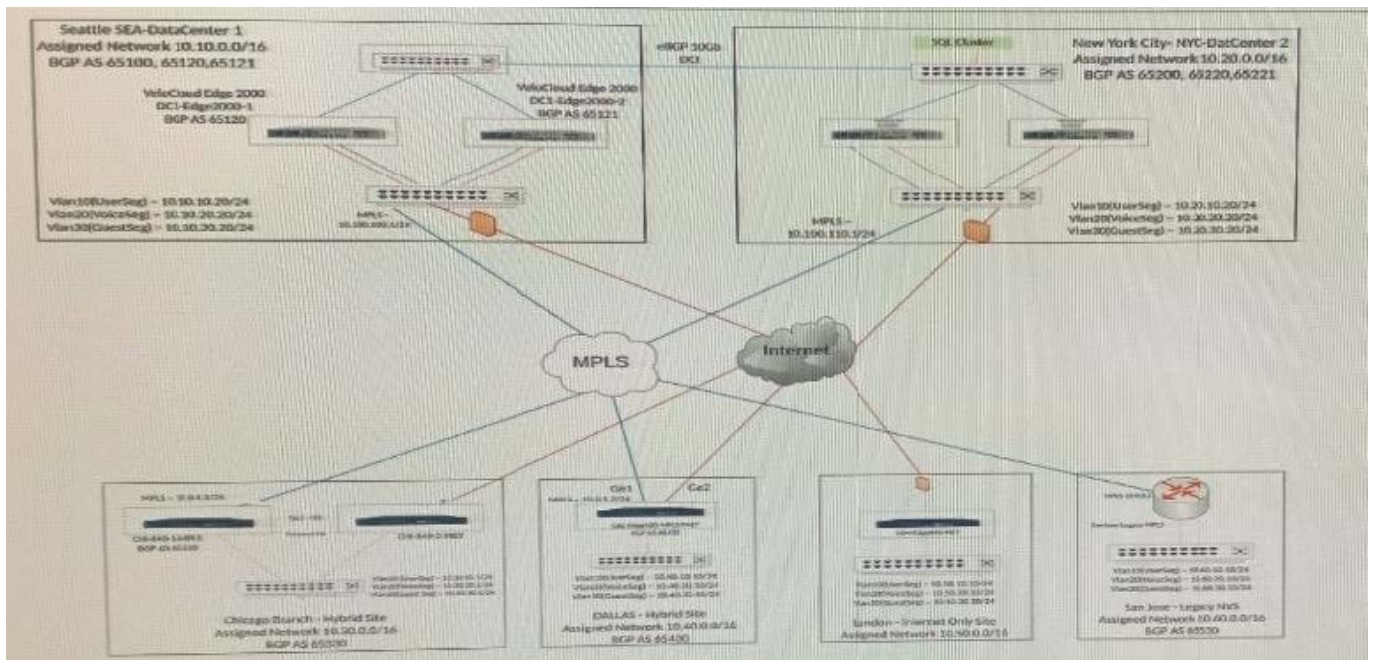

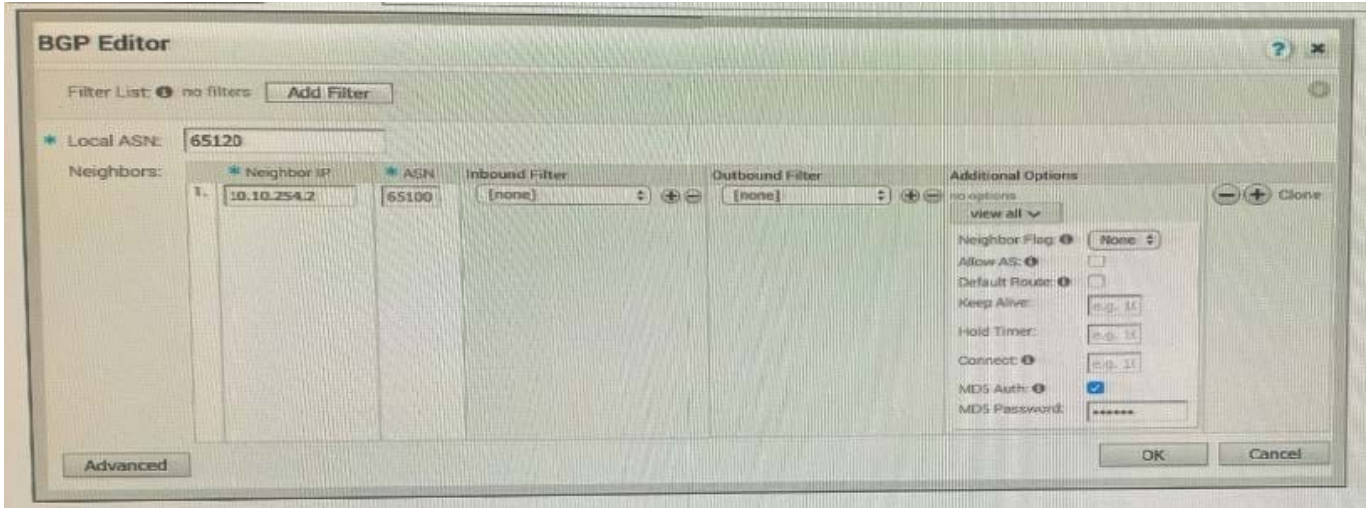

What should the administrator verify?

- A. The BGP configuration has a filter in place to deny the prefix in New York.
- B. The BGP Authentication matches on both sides.
- C. The BGP configuration has a filter in place to deny the prefix in Seattle.
- D. Backhauling through the Seattle DC is disabled.


Correct Answer: D

QUESTION 4

Scenario 3:

After resolving numerous connectivity Issues throughout the various branch sites, connectivity between applications and users is finally present- The network administrator is informed (hat during certain tests, applications are not performing as they are expected to. Users report that call quality has not fully improved and that some of their calls either drop or have poor voice quality where the conversation is breaking up. Other users are noticing that file transfers are slower than expect. A group of users from a few sites have reported slowness in accessing internal and external applications.

Exhibit.

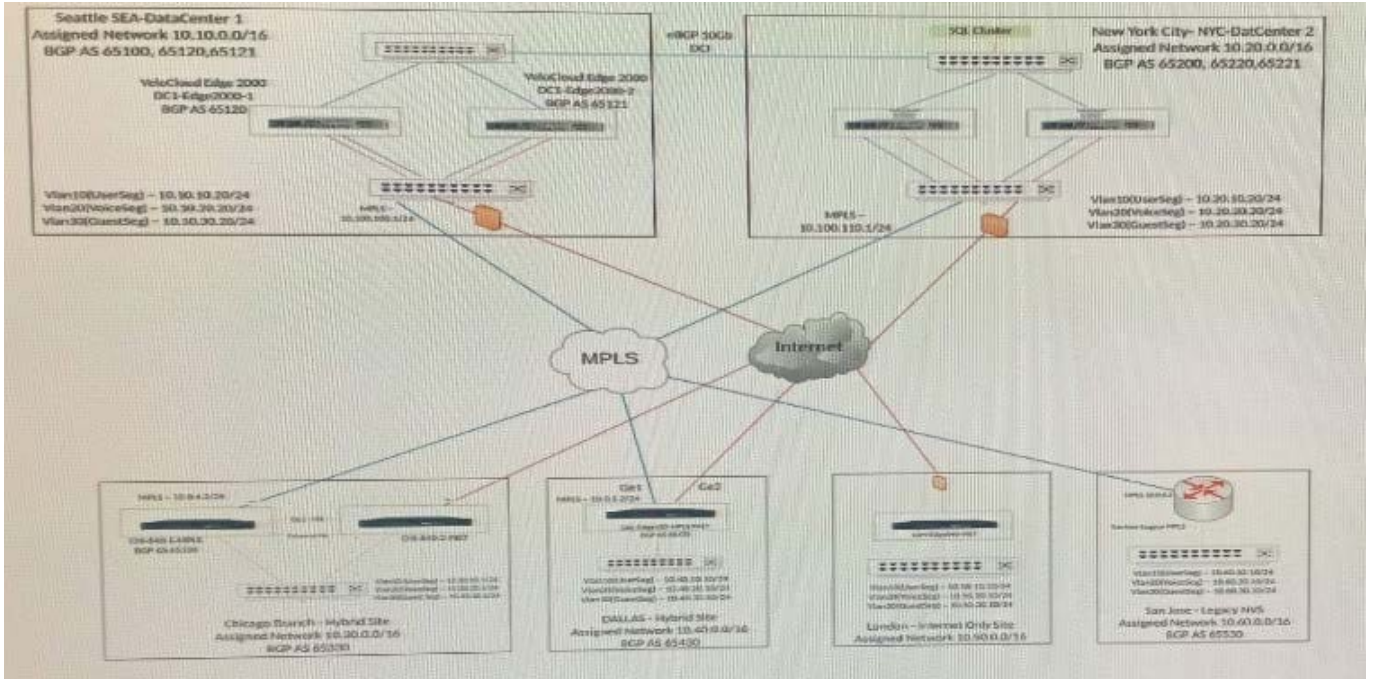

Which metrics can a network administrator verify in the QoE screen to determine the overall health of Underlay and Overlay?

- A. Jitter Packet Loss, Speed.
- B. Jitter, Packet Loss, Latency.
- C. Jitter, Speed, Latency.
- D. Packet Loss, Latency, Speed.


Correct Answer: B

QUESTION 5

Scenario 1:

A network administrator is tasked with enabling SD-WAN at three branch locations. A topology has been provided for reference. For each site, the administrator is having issues bringing edges online, as another administrator has gone ahead and created a configuration ahead of time. The organization has several branch sites. One is an Internet- only site and two are Hybrid locations with both internet and MPLS. The last location is MPLS only. There are hub data center locations in this environment as well. Please refer to the topology.

Exhibit.

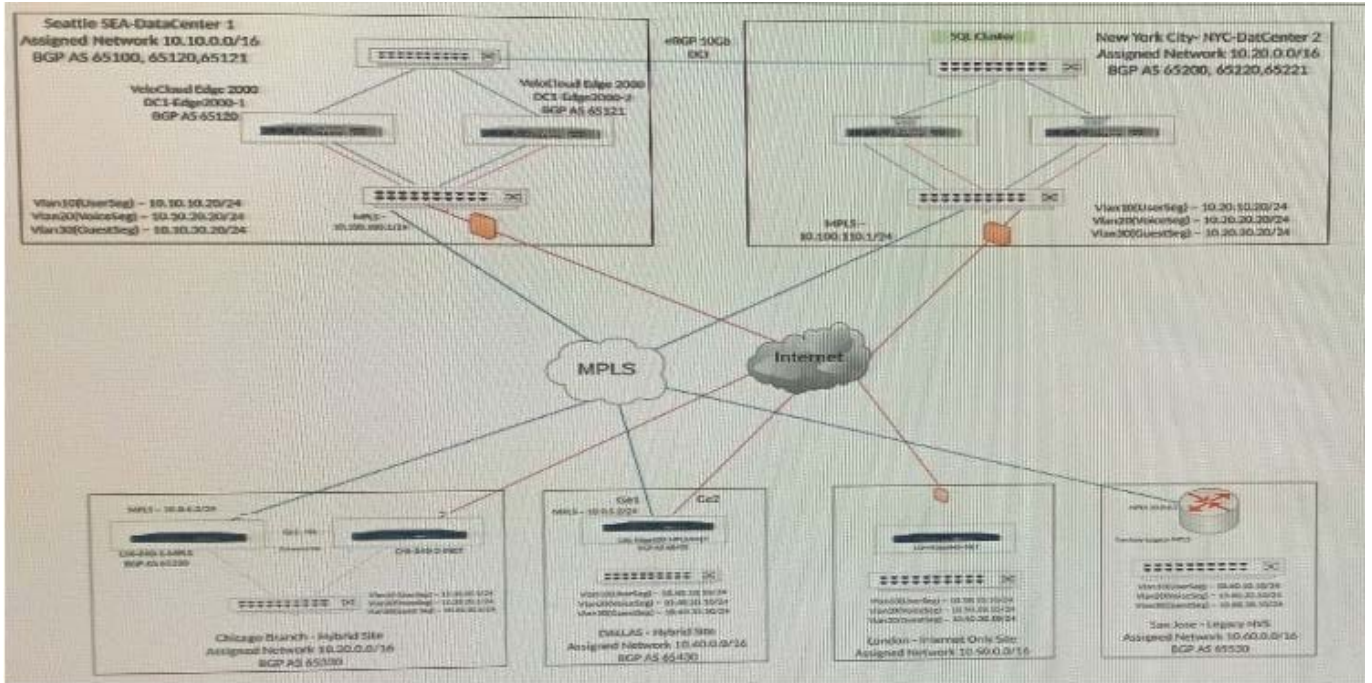

Interface Settings								
Actions		Interface	Mode	VLANs	Addressing	WAN Overlay	Segment	
Edit	<input checked="" type="checkbox"/>	LAN1	Access	1 - Corporate			Global Segment	
Edit	<input checked="" type="checkbox"/>	LAN2	Access	1 - Corporate			Global Segment	
Edit	<input checked="" type="checkbox"/>	LAN3	Access	1 - Corporate			Global Segment	
Edit	<input checked="" type="checkbox"/>	LAN4	Access	1 - Corporate			Global Segment	
Edit	<input checked="" type="checkbox"/>	LAN5	Trunk	1 - Corporate 10 - UserSeg 20 - VoiceSeg 30 - GuestSeg			Global Segment	
Edit	<input checked="" type="checkbox"/>	LAN6	Access	1 - Corporate			Global Segment	
Edit	<input checked="" type="checkbox"/>	LAN7	Access	1 - Corporate			Global Segment	
Edit	<input checked="" type="checkbox"/>	LAN8	Access	1 - Corporate			Global Segment	
Edit	<input checked="" type="checkbox"/>	GE1			Static IP: 10.0.0.1/24 Gateway: 192.0.2.1	User Defined	all segments	
Edit	<input checked="" type="checkbox"/>	GE2			DHCP	User Defined	all segments	
Edit	<input checked="" type="checkbox"/>	SFP1			DHCP	Auto Detect	all segments	
Edit	<input checked="" type="checkbox"/>	SFP2			DHCP	Auto Detect	all segments	
Edit	<input checked="" type="checkbox"/>	WLAN1	WiFi	1 - Corporate			Global Segment	
Edit	<input checked="" type="checkbox"/>	WLAN2	Interface disabled.					

WAN Settings				
Type	Name	Interfaces	Link Type	Alerts
User Defined	INET	GE1	Public Wired	<input checked="" type="checkbox"/>
User Defined	MPLS	GE2	Private Wired	<input checked="" type="checkbox"/>

The network administrator determines the issue preventing the Dallas Branch from coming online.

Refer to the Exhibit(s).

What must the administrator do for the Edge to communicate with the Orchestrator and other branches?

- A. Reverse the WAN Overlay configurations
- B. Update the Orchestrator to the latest version as it enables "Auto WAN Swapping"
- C. Delete the User Defined WAN Overlays as the Orchestrator will discover these automatically on MPLS and Internet

D. Create a User-defined WAN Overlay to bond both interfaces

Correct Answer: A

[5V0-41.20 Practice Test](#)

[5V0-41.20 Exam Questions](#)

[5V0-41.20 Braindumps](#)