

5V0-41.20^{Q&As}

VMware SD-WAN Troubleshoot

Pass VMware 5V0-41.20 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/5v0-41-20.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by VMware
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers




QUESTION 1

Scenario 2:

After completing the branch activation activities for all required branches, the network administrator attempts to test connectivity between the various branches and between the hubs and branches. The administrator notices a lack of connectivity despite being certain that configurations have been complete. The administrator also observed that several users are reporting intermittent connectivity to some of the applications they are accessing. Other users are reporting no access to these applications. Other users at some of the branches claim they cannot get to certain public resources. The administrator wants to ensure that all sites can talk to each other and all resources are accessible.

Exhibit.

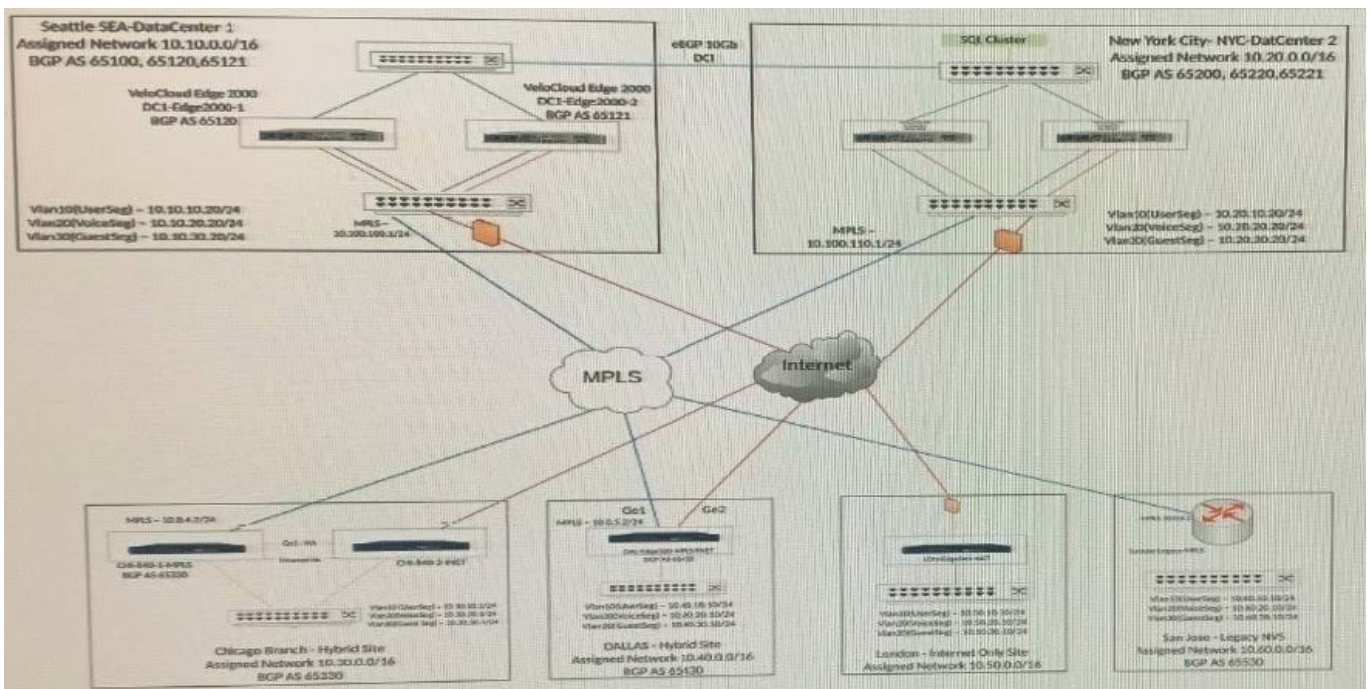

One branch location is not able to communicate with another branch location via dynamic branch-to-branch tunnels. While troubleshooting at the Edge configuration level, the network administrator notices Cloud VPN is not enabled and is grayed out, preventing them from enabling that feature.

- A. Where is the next location to check for and enable the necessary feature?
- B. Within the Configuration section under Profiles. Within the Monitor section under Network Services.
- C. Within the Test and Troubleshooting section under Remote Diagnostics.
- D. Within the Configuration section under Customer VPN enablement.


Correct Answer: D

QUESTION 2

Scenario:1

A network administrator is tasked with enabling SD-WAN at three branch locations, A topology has been provided for reference. For each site, the administrator is having issues bringing edges online, as another administrator has gone ahead and created a configuration ahead of time. The organization has several branch sites. One is an Internet- only site and two are Hybrid locations with both internet and MPLS. The last location is MPLS only. There are hub data center in this environment as well. Please refer to the topology.

Exhibit.

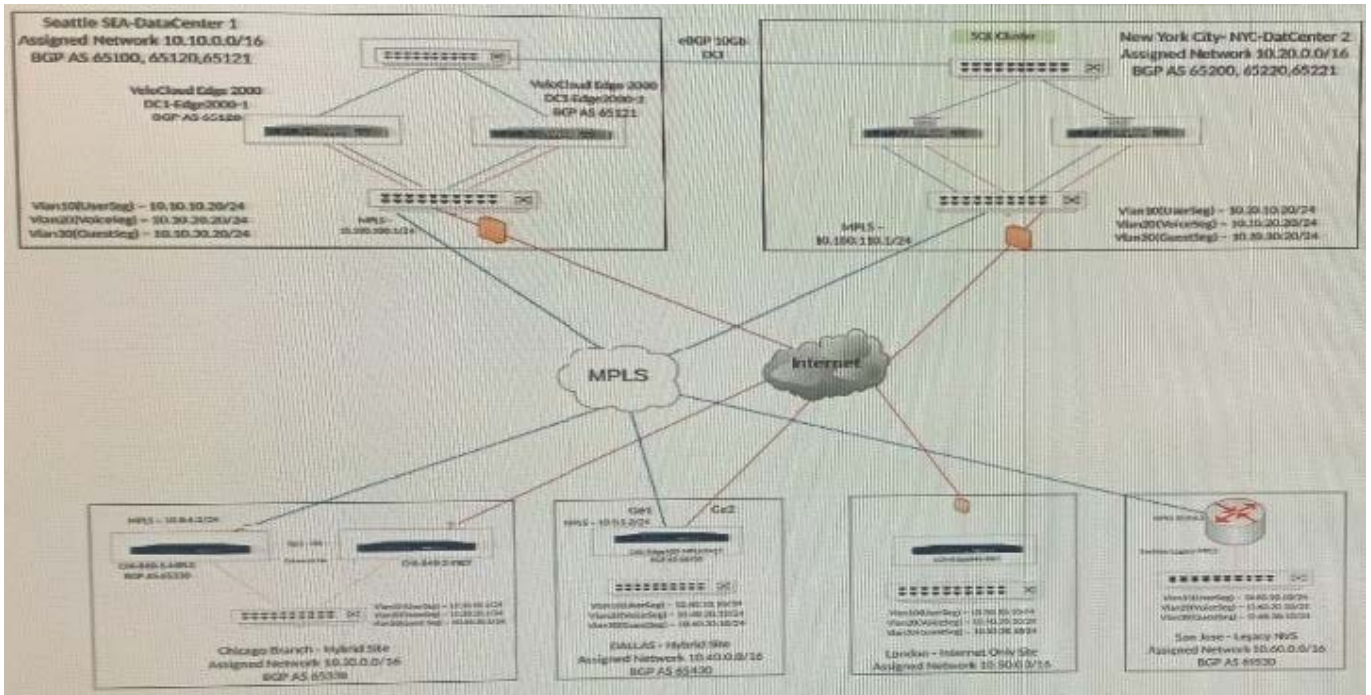

One of the Edges at the Chicago site is unable to activate. The Edge has a red LED. What is the next troubleshooting step?

- A. If the Edge is connected to its HA peer, determine if there is a link-light on the HA peer- link.
- B. If the Edge is connected to the MPLS circuit, determine if the Hub is advertising gateway routes.
- C. If the Edge is connected to the MPLS circuit which does not have DHCP, determine if there is a static IP configuration that needs to be applied upon activation.
- D. If the Edge is connected to its HA peer, determine if underlay BGP peering is present between the two Edges.

Correct Answer: C


QUESTION 3

Scenario 2:

After completing the branch activation activities for all required branches, the network administrator attempts to test connectivity between the various branches and between the hubs and branches. The administrator notices a lack of

connectivity despite being certain that configurations have been complete. The administrator also observed that several users are reporting intermittent connectivity to some of the applications they are accessing. Other users are reporting no access to these applications. Other users at some of the branches claim they cannot get to certain public resources. The administrator wants to ensure that all sites can talk to each other and all resources are accessible.

Exhibit.

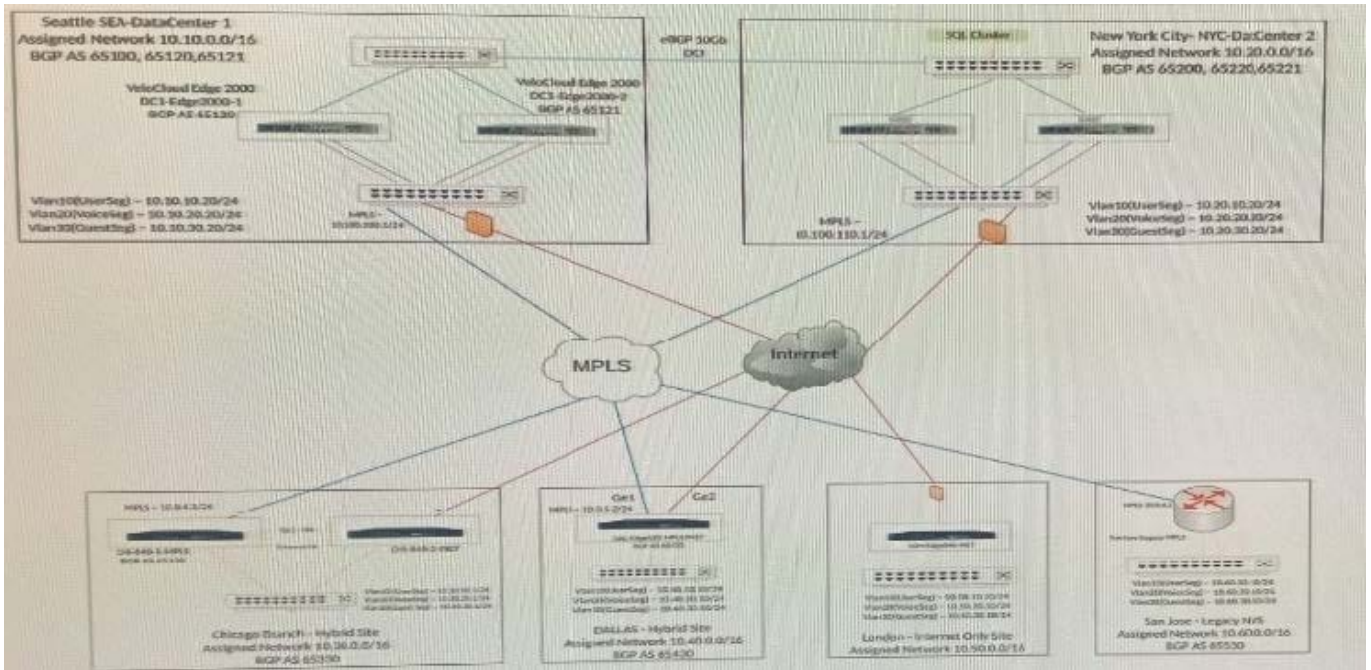

The tunnel from spoke to hub is not coming up. What are the two possible reasons? (Choose two.)

- A. Spoke Edge and hub Edge are two different Edge models.
- B. Spoke Edge and hub Edge have a mismatch certificate authentication mode.
- C. Hub WAN Interface might be behind the NAT Device or firewall.
- D. Dynamic Branch to Branch is not enabled.


Correct Answer: BC

QUESTION 4

Scenario 3:

After resolving numerous connectivity Issues throughout the various branch sites, connectivity between applications and users is finally present. The network administrator is informed that during certain tests, applications are not performing as they are expected to. Users report that call quality has not fully improved and that some of their calls either drop or have poor voice quality where the conversation is breaking up. Other users are noticing that file transfers are slower than expect. A group of users from a few sites have reported slowness in accessing internal and external applications.

Exhibit.

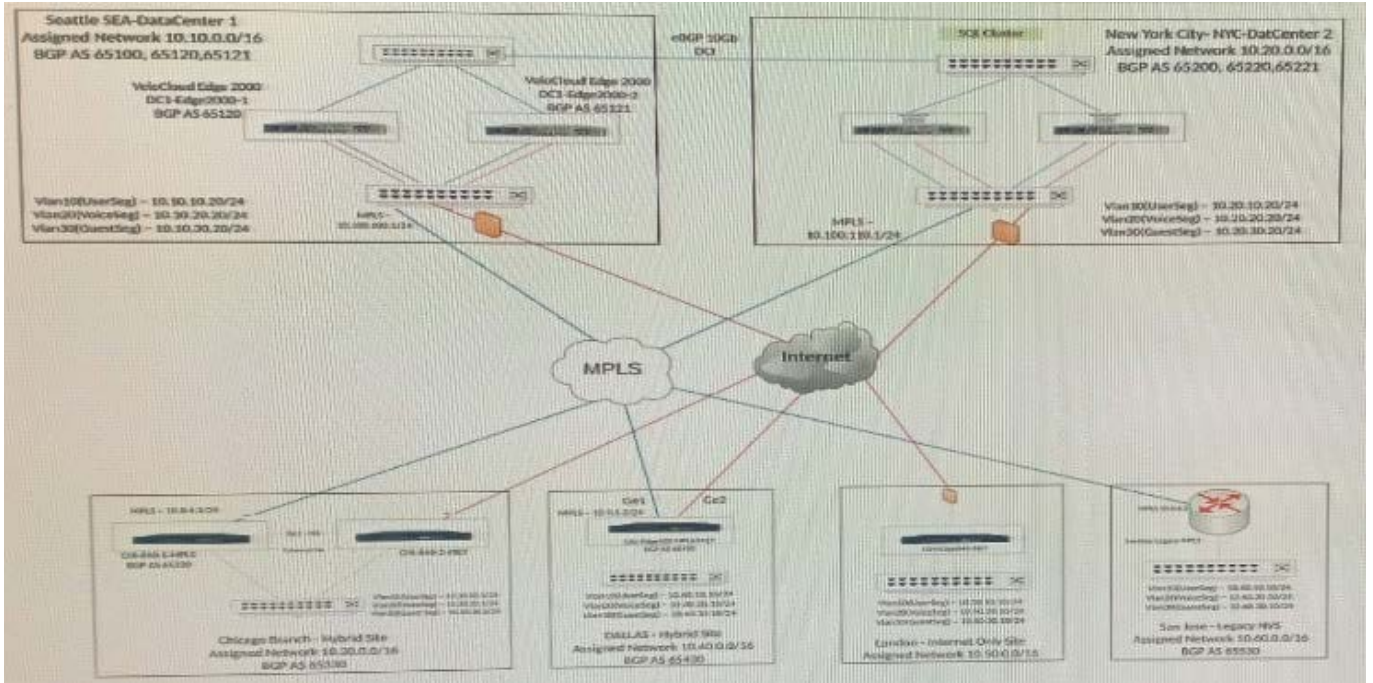

The network administrator has been made aware that Chicago is receiving traffic from non- SD-WAN sites, bottlenecking Chicago's interfaces. The network administrator's VMware SE has mentioned using the uplink feature to help resolve this.

What are two ways the uplink feature should be used in this scenario? (Choose two.)

- A. Set the uplink community to forward traffic to a group of neighbors.
- B. Direct all traffic to that neighbor designated as an uplink,
- C. Stop mutual redistribution of routes from underlay and overlay.
- D. Prevent the site in question from becoming a transit site.


Correct Answer: BD

QUESTION 5

Scenario 2:

After completing the branch activation activities for all required branches, the network administrator attempts to test connectivity between the various branches and between the hubs and branches. The administrator notices a lack of connectivity despite being certain that configurations have been complete. The administrator also observed that several users are reporting intermittent connectivity to some of the applications they are accessing. Other users are reporting no access to these applications. Other users at some of the branches claim they cannot get to certain public resources. The administrator wants to ensure that all sites can talk to each other and all resources are accessible.

Exhibit.

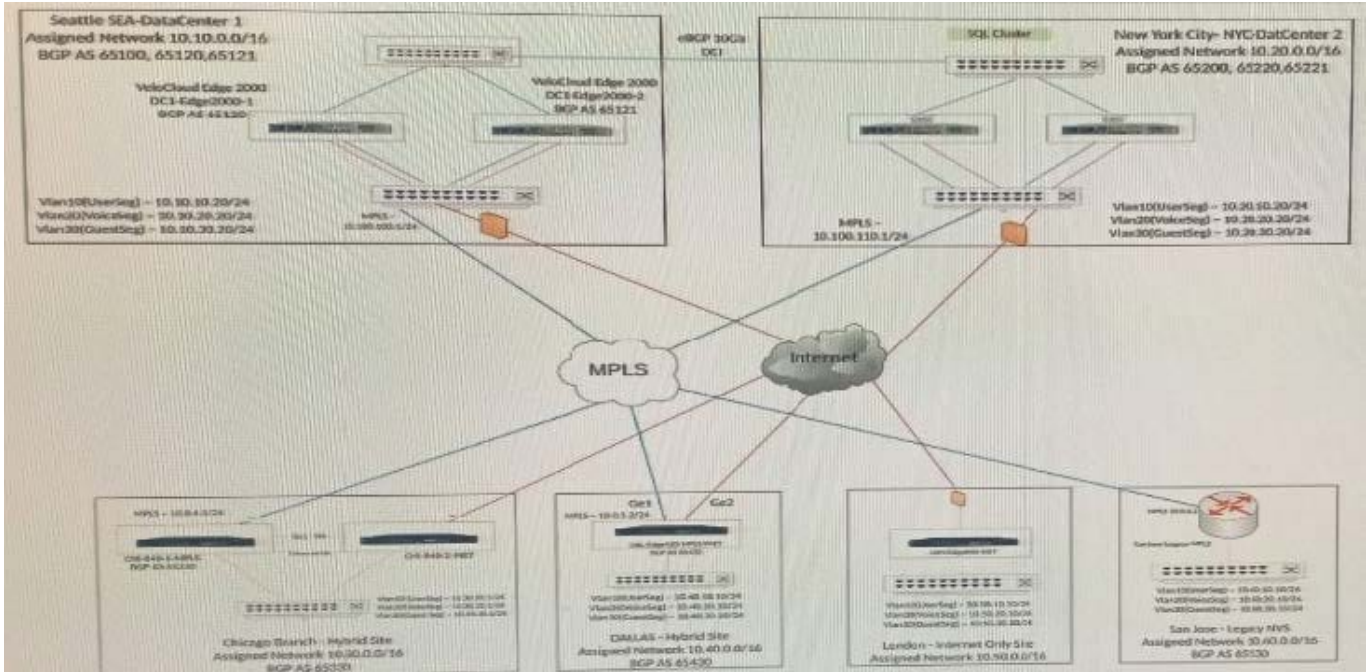

Where can the network administrator check to see what routes are present on the London- site Edge?

- A. Log into the VCO > Configuration > Overlay Flow Control
- B. Log into the VCO > Test and Troubleshoot > Remote Diagnostics > Run "List Paths"
- C. Log into the VCO > Test and Troubleshoot > Remote Diagnostics > Run "Route Table Dump"
- D. Log into the VCO > Monitoring > Overlay Flow Control

Correct Answer: C

[5V0-41.20 Study Guide](#)

[5V0-41.20 Exam Questions](#)

[5V0-41.20 Braindumps](#)