642-999 Q&As

Implementing Cisco Data Center Unified Computing

Pass Cisco 642-999 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass4lead.com/642-999.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco Official Exam Center

Instant Download After Purchase
100% Money Back Guarantee
365 Days Free Update
800,000+ Satisfied Customers

QUESTION 1

Which option describes the difference between "high-performance" and "none" on a VM- FEX port profile?

A. None is software assisted, and high-performance is software and hardware assisted.

B. None indicates that VM-FEX is not used on this interface, and high-performance indicates that is used.

C. None is used for management profiles, and high-performance is used for mission-critical data profiles.

D. None assumes default scheduling settings for the port profile, and high-performance gives the ports priority in scheduling.

Correct Answer: A

QUESTION 2

Select and Place:

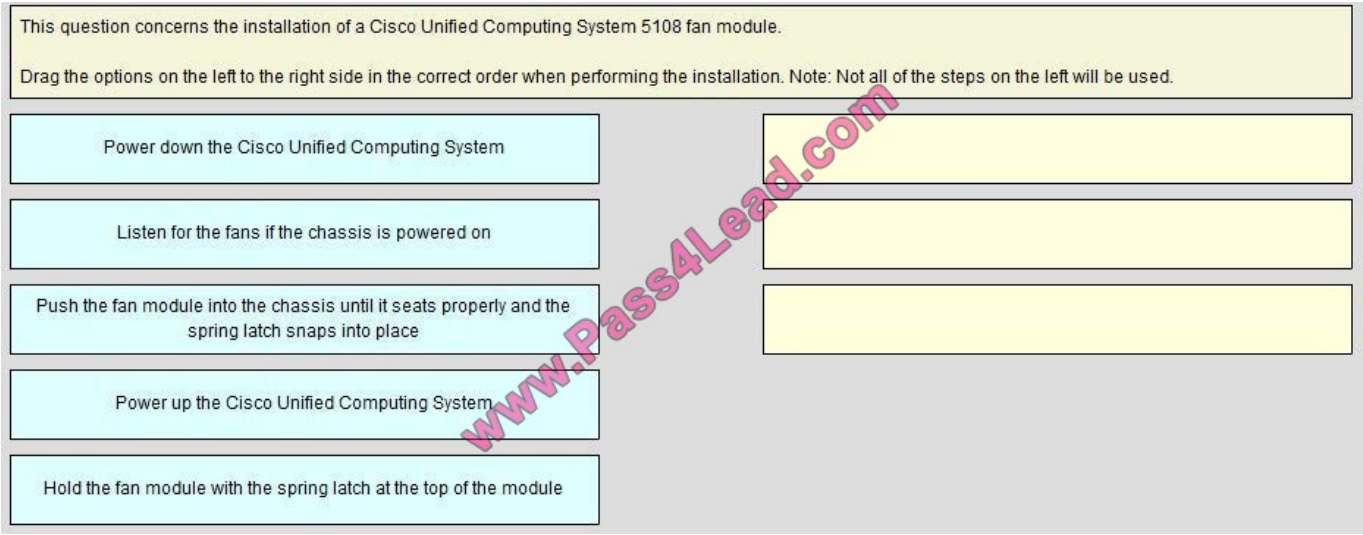

Correct Answer:

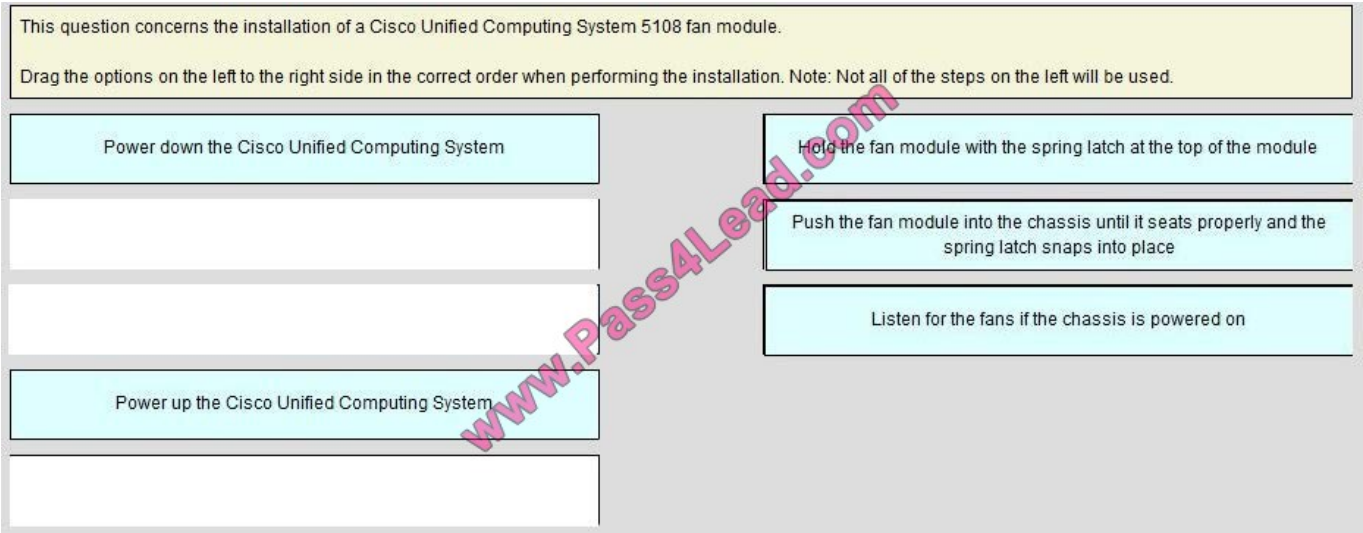

QUESTION 3

Which two statements describe the full state type of backup? (Choose two.)

A. It is a binary file.

B. It cannot be used to restore the system during disaster recovery.

C. It can use this file for an import.

D. It can be used only on a system that is running the same version as the system from which the backup file was exported.

E. It is an XML file.

Correct Answer: AD

QUESTION 4

Which policy would you change to form a port channel between a Cisco UCS 6248 and a Cisco UCS 2208?

A. link aggregation policy

B. chassis discovery policy

C. IOM connection policy

D. link discovery policy

Correct Answer: B

QUESTION 5

An admin wants to make sure that for each VLAN added to a vNIC, a static MAC address entry is added to the fabric interconnect. Which setting within Cisco UCS Manager accomplishes this task?

A. The MAC Register Mode in the network control policy is set to Only Native VLAN.

B. The MAC Register Mode in the LAN connectivity policy is set to All Host VLANs.

C. The MAC Register Mode in the network control policy is set to All Host VLANs.

D. The MAC Register Mode in the LAN connectivity policy is set to Only Native VLAN.

E. The MAC Register Mode in the link protocol policy is set to All Host VLANs.

F. The MAC Register Mode in the link protocol policy is set to Only Native VLAN.

Correct Answer: C

Latest 642-999 Dumps 642-999 Exam Questions 642-999 Braindumps

To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications.
You can view Vendor list of All Certification Exams offered:

https://www.pass4lead.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket:

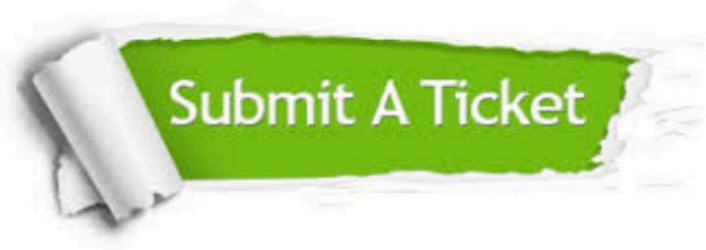

Any charges made through this site will appear as Global Simulators Limited.
All trademarks are the property of their respective owners.
Copyright © pass4lead, All Rights Reserved.