

# 75940X<sup>Q&As</sup>

Avaya Converged Platform Integration

## Pass Avaya 75940X Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/75940x.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Avaya  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

What is a benefit of using Virtual Router Redundancy Protocol (VRRP) on the VSP switches in the ACP 4200?

- A. It creates virtual Layer 2 connections for the VMs.
- B. It allows you to connect to the switches for management access.
- C. It ensures the end systems do not need to change their gateway IP address in the event of a fail-over.
- D. It allows the end systems to automatically change their gateway IP address in the event of a fail-over.

Correct Answer: D

Reference: <https://www.alliedtelesis.com/en/documents/vrrp-feature-overview-and-configuration-guide>

---

**QUESTION 2**

When powering up the virtual machines, what is the first virtual machine that needs to be powered on?

- A. vCenter Server
- B. WebLM
- C. System Manager
- D. Communication Manager

Correct Answer: A

---

**QUESTION 3**

Which three examples of hardware equipment redundancy are built into the ACP 4200? (Choose three.)

- A. Redundant iLO connections to each HP server.
- B. Redundant storage processors in the storage arrays.
- C. Redundant hot swap switch CPU modules.
- D. Redundant power supplies in all hardware components.
- E. Redundant pairs of Power Distribution Units.

Correct Answer: ACE

---

**QUESTION 4**

A new ESXi host has been added to the ACP 4200. However, unlike existing ESXi hosts within the ACP 4200, the new

host cannot be monitored or detected by Avaya Orchestrator.


What is causing this problem?

- A. The new host has not been correctly configured to support vMotion.
- B. The new host has not been added to Avaya Orchestrator.
- C. The new host has not been licensed yet.
- D. The new host has not been configured for Auto Detection.

Correct Answer: B

**QUESTION 5**

Refer to the exhibit.

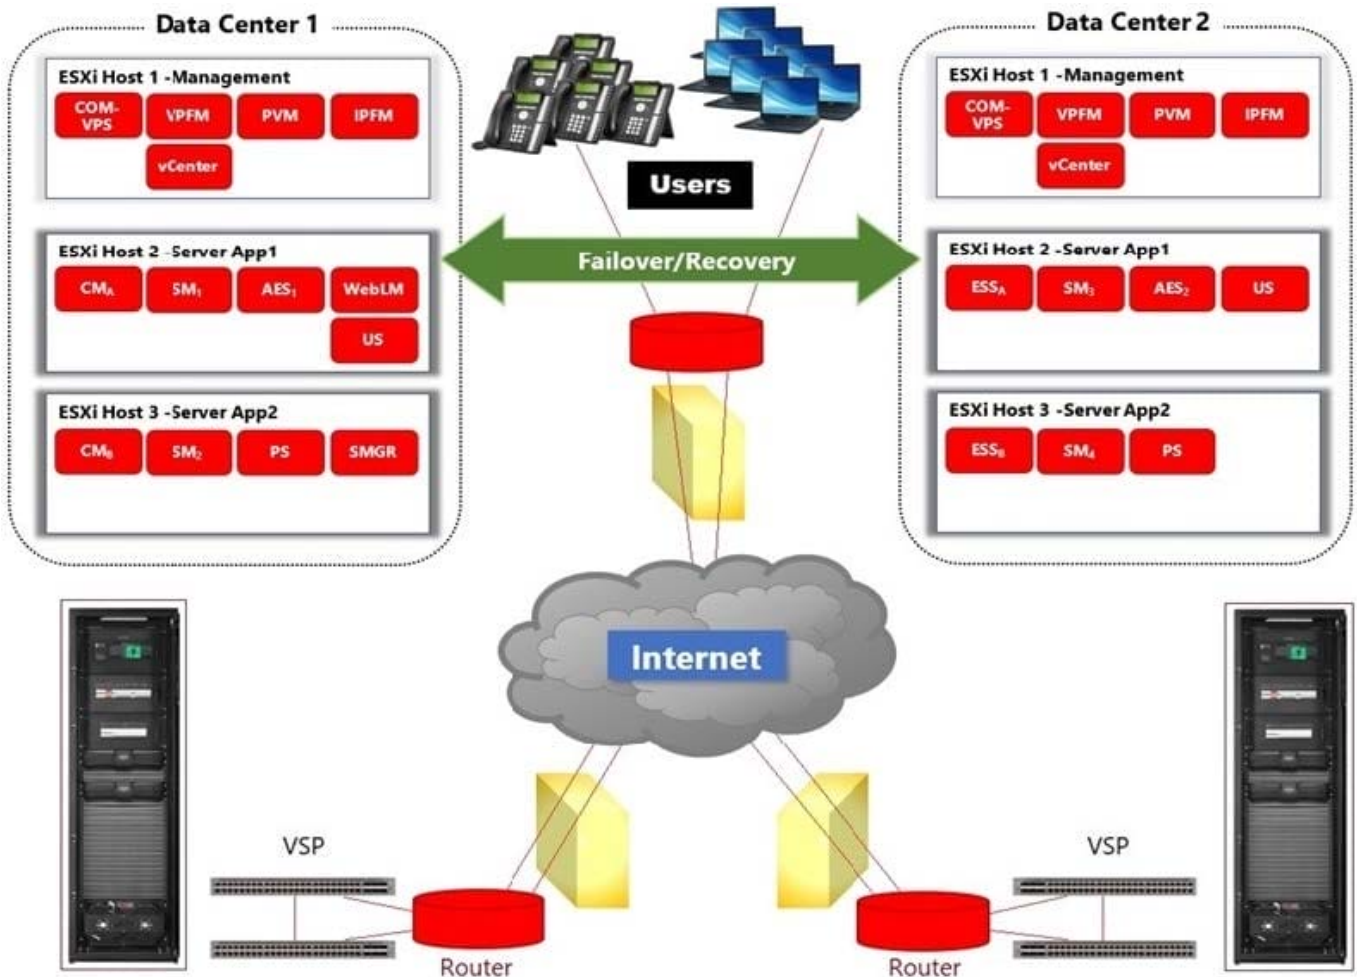

In the deployment shown in the exhibit, how is High Availability achieved across the two Data Centers?

- A. By ensuring that the L2 VLANs are extended across to both Data Centers.
- B. By managing both Data Centers using the same vCenter Server and using vMotion and DRS.

C. By using Virtualization Provisioning Service (VPS) to automate the provisioning of the network hardware and vSwitches across the two Data Centers.

D. By using Avaya Aura?Application High Availability features.

Correct Answer: C

Reference: <https://downloads.avaya.com/css/P8/documents/100182353>

[75940X VCE Dumps](#)

[75940X Practice Test](#)

[75940X Braindumps](#)