HP2-K34 Q&As

Supporting and Servicing HP 3PAR StoreServ Solutions

Pass HP HP2-K34 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass4lead.com/HP2-K34.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

QUESTION 1

Which situation prevents you from using SmartStart to install an HP 3PAR StoreServ 7000 system at a customer site?

A. DHCP is not running in the customer environment

B. The customer will not allow remote access of the Service Processor

C. The controller nodes and the service processor are connected to the same network.

D. All the customer servers are running Windows 2008 R2.

Correct Answer: D

QUESTION 2

Which HP resource can be used to obtain the latest information on operating system support in an

HP 3PAR Storage System environment?

A. HP Single Point of Connectivity Knowledge

B. HP 3PAR Storage System Information Library

C. HP Product Bulletin

D. HP Active Answers

Correct Answer: A

Reference:http://h18000.www1.hp.com/products/quickspecs/14433_na/14433_na.pdf(page 3, see the text in blue)

QUESTION 3

Match each description to the correct HP 3PAR StoreServ thin technology.

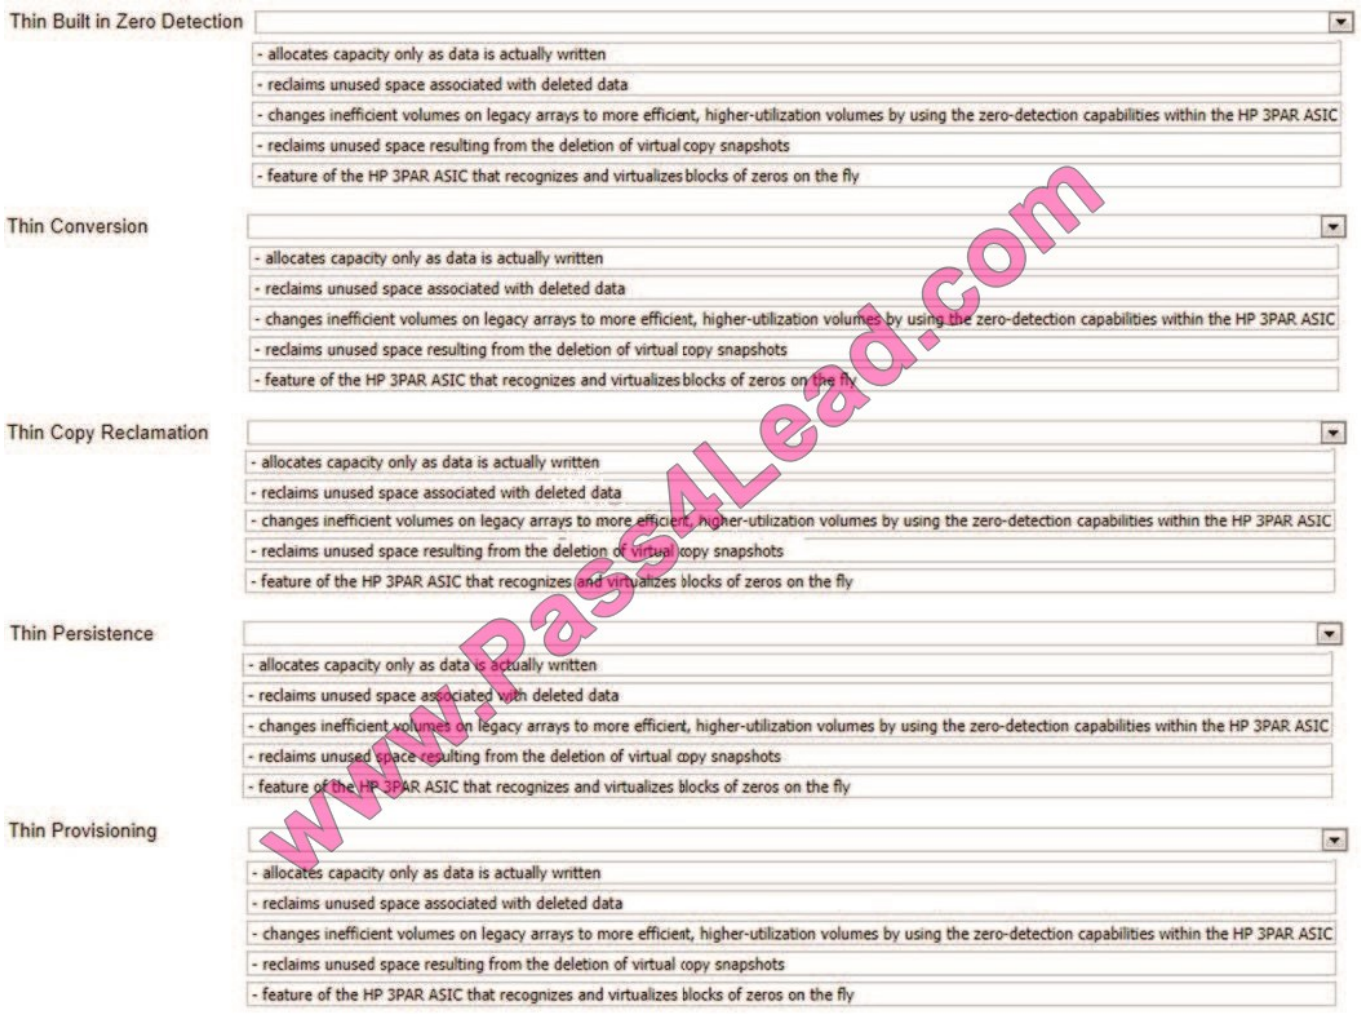

Hot Area:

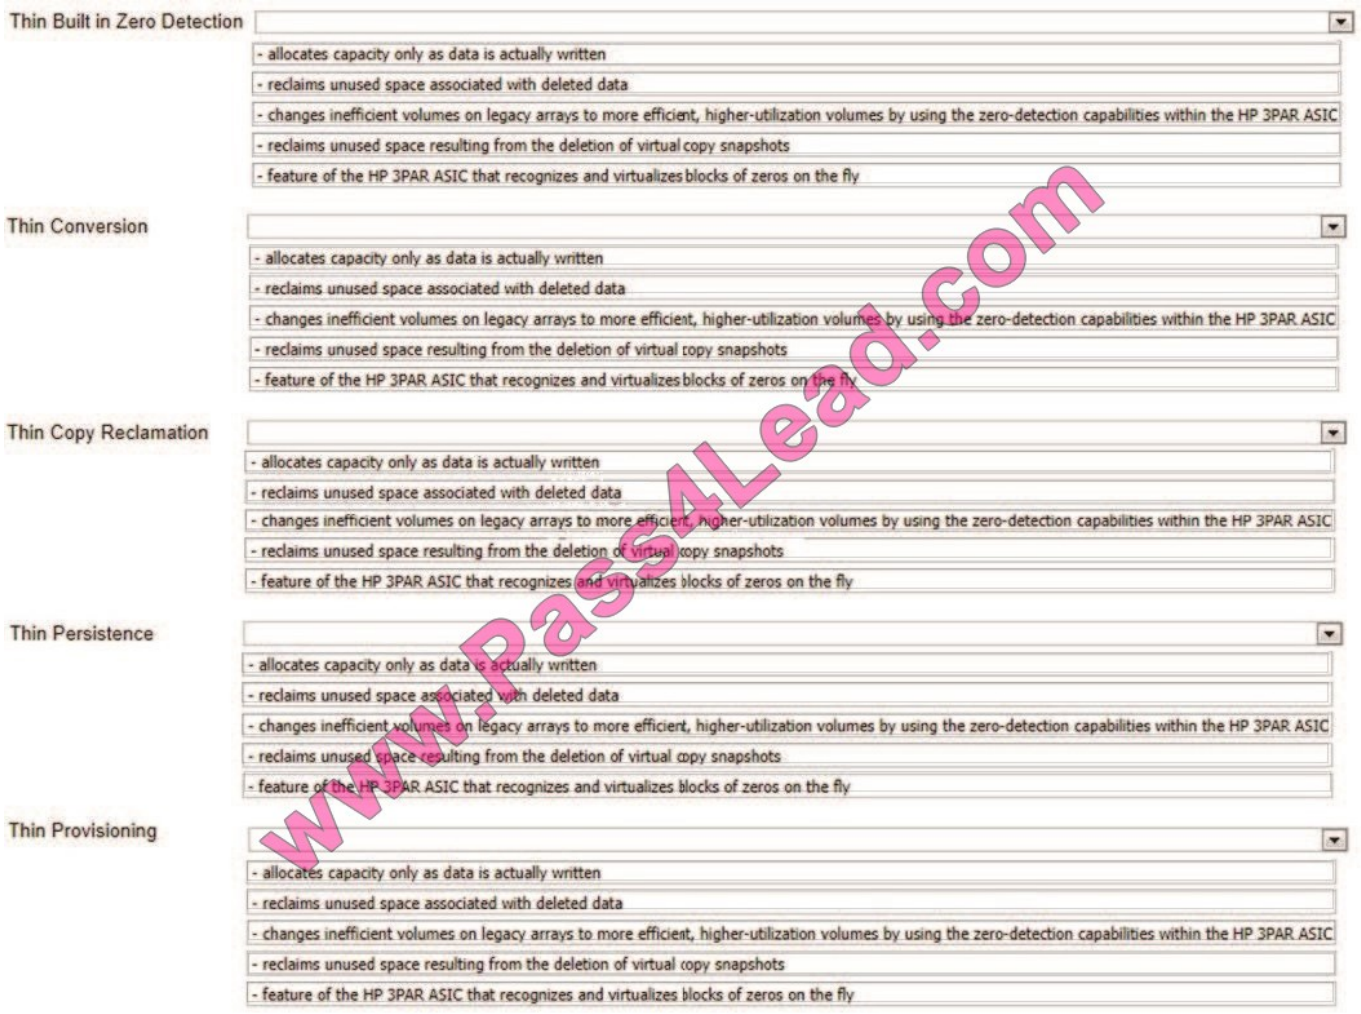

Correct Answer:

QUESTION 4

What is true about the node interconnection link cables on the HP 3PAR StoreServ 7400?

A. They are color coded

B. Their length is a maximum of 2 meters,

C. They are directional

D. Their ends are labeled with an Aand C

Correct Answer: CD

Reference:http://h20628.www2.hp.com/km-ext/kmcsdirect/emr_na-c03692717-2.pdf(page 23, see caution)

QUESTION 5

You are installing an HP 3PAR StoreServ 10800. The customer needs persistent ports to enable a node pair to transparently failover and back with no interruption or pause of the host I/O during an upgrade or node failure. Which

best practices should you recommend to meet this requirement? (Select two.)

A. All controller ports from a single node should be connected to the same fabric.

B. StoreServ controller nodes should be connected to alternate fabrics.

C. Host ports should be zoned in partner pairs.

D. Host ports require port-based zoning

E. Ports of the same pair of nodes with the same ID should be connected to the same fabric

Correct Answer: CE

Reference:http://h20195.www2.hp.com/V2/GetPDF.aspx%2F4AA4-4524ENW.pdf(page 18, see front-end port cabling, best practice)

To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications.
You can view Vendor list of All Certification Exams offered:

https://www.pass4lead.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket: