

JN0-343^{Q&As}

Juniper Networks Certified Internet Specialist (JNCIS-ENT)

Pass Juniper JN0-343 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/jn0-343.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1


Which statement describes a routing instance on a Junos device?

- A. A routing instance provides separation of processing resources.
- B. A routing instance provides control plane separation.
- C. A routing instance virtualizes a Junos-based device, enabling it to run multiple copies of the Junos OS on the same system.
- D. A routing instance is a unique collection of routing tables, interfaces, and routing protocol parameters.

Correct Answer: D

QUESTION 2

Referring to the exhibit, what does the asterisk (*) following the ge-0/0/12.0 interface indicate?

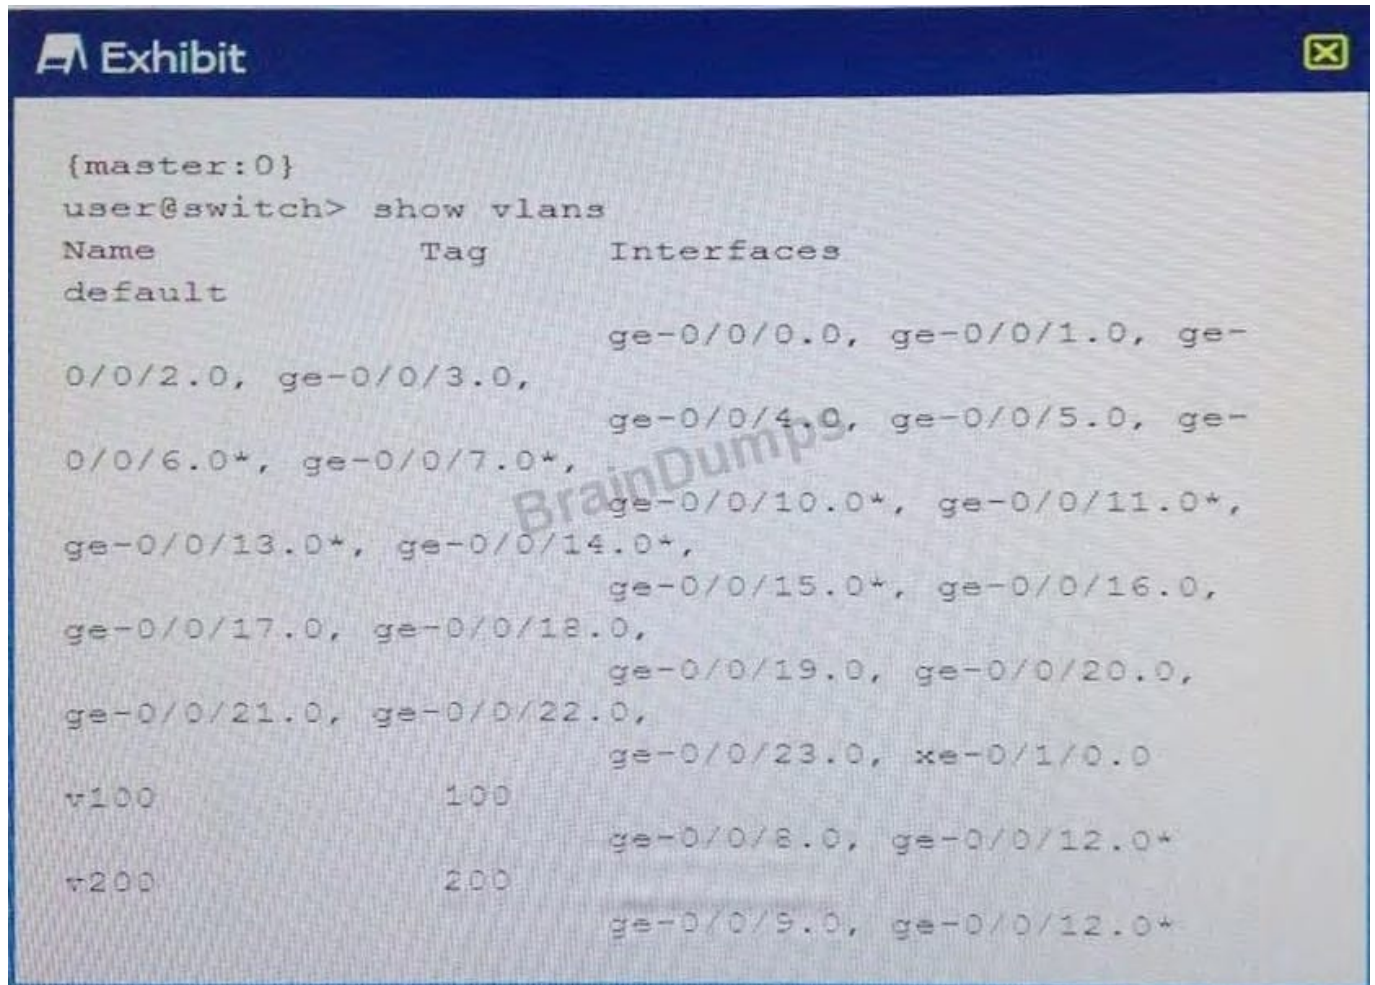

- A. It indicates the interface is active.

- B. It indicates the interface is not active.
- C. It indicates the interface is a trunk port.
- D. It indicates the interface is an access port.

Correct Answer: A

QUESTION 3

Which two statements are true of GRE? (Choose two.)

- A. GRE can encapsulate and transport protocols other than IP across an IP network.
- B. GRE can create a point-to-point link between two devices separated by multiple hops
- C. GRE encrypts the data it transports to ensure data integrity.
- D. GRE maintains state at Layer 5 of the OSI reference model.

Correct Answer: AB

QUESTION 4

Which two statements about RSTP are correct? (Choose two.)

- A. RSTP permits multiple root bridges within a Layer 2 domain.
- B. RSTP permits only a single root bridge within a Layer 2 domain.
- C. RSTP is backwards compatible with STP.
- D. RSTP is not backwards compatible with STP.

Correct Answer: BC

QUESTION 5

You want to ensure that interface routes appear in multiple routing instances. Which configuration accomplishes this scenario?

- A. Configure each interface under multiple routing instances.
- B. Add an import policy for each routing instance.
- C. Configure the routing instance to be a forwarding type instead of a virtual-router type.
- D. Configure a RIB group and configure the router to install interface routes in the RIB group.

Correct Answer: D

[JN0-343 PDF Dumps](#)

[JN0-343 VCE Dumps](#)

[JN0-343 Study Guide](#)