

DES-4121^{Q&As}

PowerEdge Specialist Exam for Implementation Engineer

Pass EMC DES-4121 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/des-4121.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by EMC
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

Refer to the exhibit.

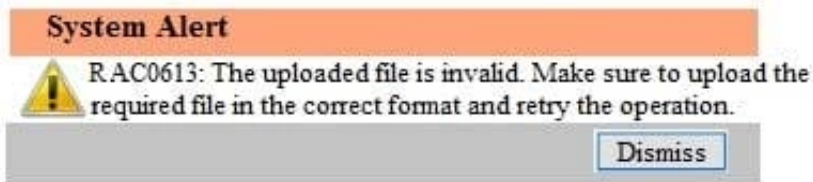

A technician tries to apply a BIOS update on a server through the iDRAC web interface using the Linux Dell Update Package file BIOS_2H4CC_LN_2.0.2.BIN. This results in the error shown in the exhibit.

What should the technician do to address this issue?

- A. Reset the iDRAC and reapply the update
- B. Extract the Linux Dell Update Package and apply payload file
- C. Re-download the file to replace the corrupted version and reinstall
- D. Download and apply the Windows Dell Update Package file

Correct Answer: A

QUESTION 2

A technician is setting up a previously used server. Upon power up, the PERC alerts them to the presence of a foreign configuration. In the iDRAC storage section, the technician checks Foreign View. The foreign array configuration is the same as the configuration needed for the new project.

What is a recommended way to prepare the disks for the new project?

- A. Edit the foreign configuration and set it to Ready
- B. Import the foreign configuration and perform a full initialization
- C. Format the foreign configuration and clear the controller configuration
- D. Access the Ctrl+R utility, clear the foreign configuration and set up array as needed

Correct Answer: D

Reference <https://www.dell.com/community/PowerEdge-HDD-SCSI-RAID/PERC-H310-active-drives-arelisted-in-foreign-config/td-p/6126153>

QUESTION 3

A technician needs to configure a server to PXE boot a server setup image with the BIOS in UEFI mode. What action is

required to enable this function?

- A. Navigate to Network Settings, PXE Device1 Settings, and configure IP
- B. Boot to Ctrl+S and configure the NIC for PXE Device1
- C. From the iDRAC web interface, select Network Settings, and enable PXE Device1
- D. Navigate to Boot Options Settings and set PXE Device1 as first option

Correct Answer: D

QUESTION 4

A server is configured with a RAID 5 Virtual Disk across five hard disks and one spare disk. If a hard disk failure occurs within the RAID 5 virtual disk, the spare disk needs to be online as quickly as possible. It is acceptable for users to experience decreased performance during the rebuild procedure.

How should this requirement be met?

- A. Enable Rebuild Priority
- B. Increase Rebuild Rate
- C. Change cache to Write Through
- D. Select Fast Rebuild

Correct Answer: A

QUESTION 5

A server has two power supply units (PSUs) in a redundant configuration. One PSU fails. A technician replaces the failed PSU, but the server does not return to redundant power mode.

What is the cause of this issue?

- A. Power redundant option is disabled in the System Setup Utility.
- B. Server has not been power cycled to bring the new PSU online
- C. Both PSUs were not replaced at the same time
- D. New PSU has a different wattage than the existing PSU

Correct Answer: B