

H12-211^{Q&As}

HCIA-Routing & Switching V2.2

Pass Huawei H12-211 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/h12-211.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by Huawei
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

Refer to the graphic.

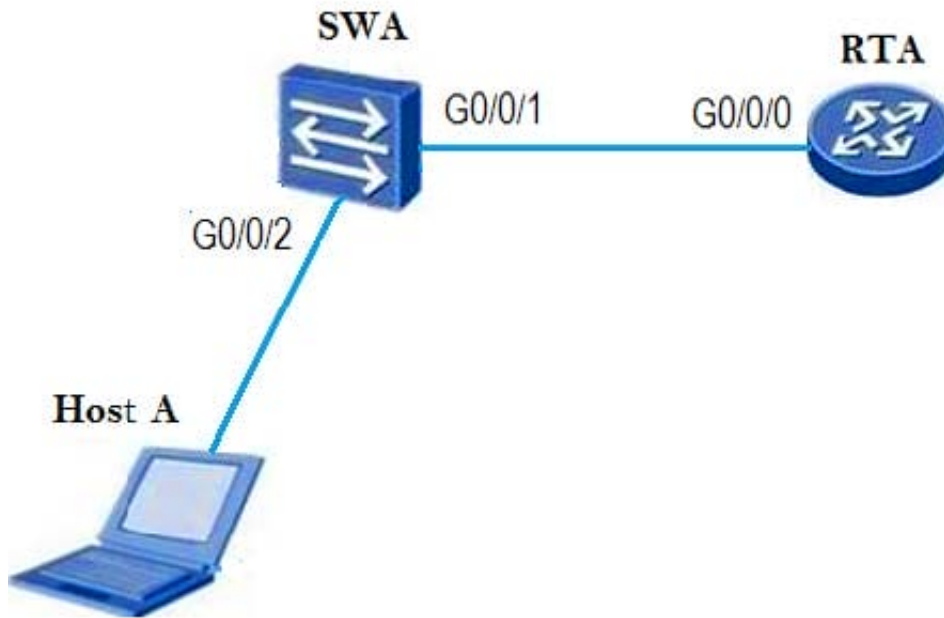

A host has established a telnet connection with the router attached to interface G0/0/0. Which of the following statements are correct? (Choose two)

- A. The destination address of a frame sent by the host will be the MAC address of the router interface.
- B. The destination address of a frame will be the MAC address of the switch interface.
- C. The destination port number in a segment header will have a value of 80.
- D. The destination IP address of a packet will be the IP address of the network interface of the router.

Correct Answer: AD

QUESTION 2

An ARP request is sent by host A to obtain the destination MAC address of host D. Which statement is true about regarding the ARP reply?

- A. The destination MAC address of this frame is the MAC address of Switch A.
- B. The destination IP address of this packet is the VLANIF1 IP address of Switch A.
- C. The destination MAC address of this frame is the MAC address of Host A.
- D. The destination IP address of this packet is a broadcast IP address.

Correct Answer: C

QUESTION 3

When the router's configuration file is saved, which storage medium is generally stored on it?

- A. SDRAM
- B. NVRAM
- C. Flash
- D. Boot ROM

Correct Answer: C

QUESTION 4

When an IPsec tunnel is established between two routers, which of the following parameters does not need to be consistent between IPsec peers?

- A. The security protocol used
- B. Data encapsulation mode
- C. Proposal name
- D. Authentication algorithm

Correct Answer: C

QUESTION 5

If the IPv4 address of a host on a local area network (LAN) is 192.168.1.1/30, which of the following destination IPv4 addresses can be carried in data packets that the host can decapsulate?

- A. 192.168.1.1
- B. 192.168.1.2
- C. 192.168.1.3
- D. 255.255.255.255

Correct Answer: B
