

H12-261^{Q&As}

HCIE-Routing & Switching (Written) V3.0

Pass Huawei H12-261 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/h12-261.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Huawei
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

Which of the following lists, in the correct order, the protocols that use TCP ports 443, 179, 137, 110, and 23?

- A. HTTPS, BGP, NetBios Name Server, POP3, Telnet
- B. Finger, DHCP Server, NetBios Name Server, POP3, Telnet
- C. BGP, POP3, SNMP, TFTP, Telnet
- D. LDAP, SNMP, TFTP, POP3, Telnet
- E. HTTPS, SNMP, POP3, DNS, Telnet

Correct Answer: A

QUESTION 2


One of the VXLAN BD VNIs can have multiple correspondences

- A. Correct
- B. Error

Correct Answer: B

QUESTION 3

As shown in the figure, 1 2 , , URPP routers share the traffic between the branch network load network and the branch network. In this case, configure the router physical interface. Source address bullying must use loose mode P to spoof.

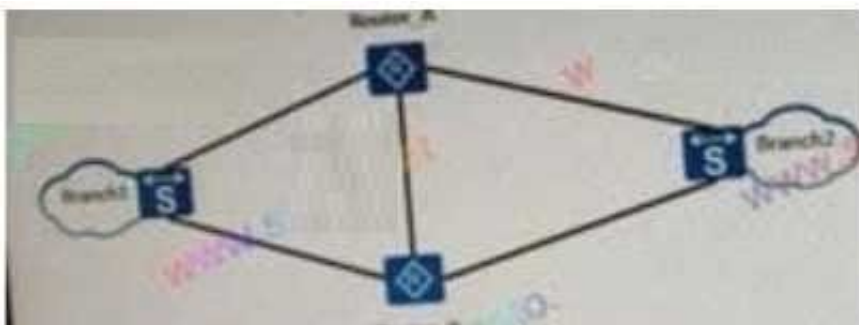

- A. True
- B. False

Correct Answer: A

QUESTION 4

The following is about the correct change of the MUX VLAN in Huawei.

- A. Under the same one, you can mix and use VLAN MUX VLAN Super VLAN
- B. MUX VLAN Principal VLAN Subor is divided into and divided into dinate VLANs, Subordinate VLAN S is separate VLAN and Isolate VLAN
- C. Each can be bound to multiple Separate VLAN Principal VLANs
- D. Principal Port MUX VLAN can communicate with all interfaces inside

Correct Answer: D

QUESTION 5

Which of the following statements regarding OSPFv3 Router-LSAs is true?

- A. The data part of a Router-LSA contains the interface IDs of the local router and its neighbors\' router ID.
- B. When LS type in the LSA header is 0x0001, the data part of the LSAs is a Router-LSA.
- C. Similar to OSPFv2, the Option field exists in an LSA header rather than the data part of a Router- LSA.
- D. The data part of a Router-LSA contains the link-local address.

Correct Answer: C

[Latest H12-261 Dumps](#)

[H12-261 Practice Test](#)

[H12-261 Study Guide](#)