

H12-891^{Q&As}

HCIE-Datacom V1.0

Pass Huawei H12-891 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/h12-891.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Huawei
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1


The following statement about EVPN Type5 routing is wrong?(Single choice questions).

- A. Type5 routes carry Layer 3 VNI.
- B. Type5 routing carries both Layer 2 VVI and Layer 3 VNI
- C. The IP Prefix field can carry both host and network segment addresses.
- D. Type5 is an IP prefix route.

Correct Answer: B

QUESTION 2

A router Router LSA is shown in the figure below, and the following statement is incorrect?

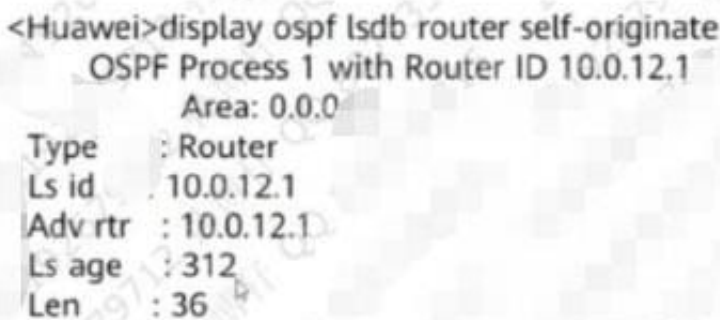

```
<Huawei>display ospf lsdb router self-originate
OSPF Process 1 with Router ID 10.0.12.1
Area: 0.0.0
Type      : Router
Ls id     : 10.0.12.1
Adv rtr   : 10.0.12.1
Ls age    : 312
Len       : 36
```

- A. This router is a DR
- B. This router has established an adjacency relationship
- C. This router supports external route ingestion
- D. The Router ID of this router is 100121

Correct Answer: A

QUESTION 3

Regarding the description of VRRP Fast Switching, the error is ?

- A. Use VRRP to monitor BFD sessions or EFM features, either in BPD sessions or EFM session states After the change, the VRRP module is notified to achieve fast VRRP switching
- B. A VRRP backup group cannot monitor Peer BFD, Link BFD, and Normal BFD
- C. at the same time If you configure to monitor multiple BFDs at the same time Then the various configurations are interrelated and may have an impact

D. When a VRRP backup group monitors normal BFD, when the BFD state changes, the active-standby state is changed by modifying the backup group priority

Correct Answer: BC

QUESTION 4

Regarding the description of the encapsulation format of the labels in MPLS, the correct one is ?

A. The TTL field in the label has a similar meaning to the TTL (Time To Live) in the IP packet, and also has the effect of preventing loops

B. The total length of an MPLS single tag is 4 bytes (32 bits).

C. For Ethernet, PPP packets, the tag stack is like a "cushion layer", located between the layer 2 header and the data, and when there is a VLAN tag, the MPLS header is placed on the Ether head and VLANtag between

D. label in the S field, Ibit Used to identify whether the label is a bottom label, and a value of 1 indicates that it is the penultimate label

Correct Answer: AB

QUESTION 5

The most effective way to view device warnings through the CLI is ?

A. Display alarm

B. Display current-configuration

C. Display interface brief

D. Display clock

Correct Answer: A

[H12-891 PDF Dumps](#)

[H12-891 VCE Dumps](#)

[H12-891 Study Guide](#)