

HP0-Y52^{Q&As}

Applying HP FlexNetwork Fundamentals

Pass HP HP0-Y52 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/hp0-y52.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

Which HP solution provides network optimization and automated network provisioning to its customers?

- A. Intelligent Management Center NTA
- B. FlexNetwork Architecture
- C. Intelligent Resilient Framework
- D. Software-defined Networking

Correct Answer: D

QUESTION 2

What is one reason to access the extended boot menu on an HP Comware switch?

- A. To access the switch CLI when you have forgotten the password
- B. To set up the switch to be managed by HP Intelligent Management Center (IMC).
- C. To configure the switch initial IP address settings
- D. To configure the switch to implement Intelligent Resilient Framework (IRF)

Correct Answer: A

QUESTION 3

A customer purchases HP Intelligent Management Center (IMC) to help manage their network. The customer needs access to real-time and historical data about users and applications that consume bandwidth. Which IMC module should the customer purchase?

- A. NTA
- B. WSM
- C. UAM
- D. EAD

Correct Answer: A

QUESTION 4

Which settings enable a network administrator to use terminal emulation software to interface with an HP Comware switch's auxiliary port?

- A. 9600 bps, 7 data bits, 1 stop bit, no parity, flow control
- B. 14,200 bps, 8 data bits, 1 stop bit, parity, flow control
- C. 9600 bps, 8 data bits, 1 stop bit, no parity, no flow control
- D. 9600 bps, 8 data bits, 1 stop bit, parity, flow control

Correct Answer: C

QUESTION 5

Exhibit1.

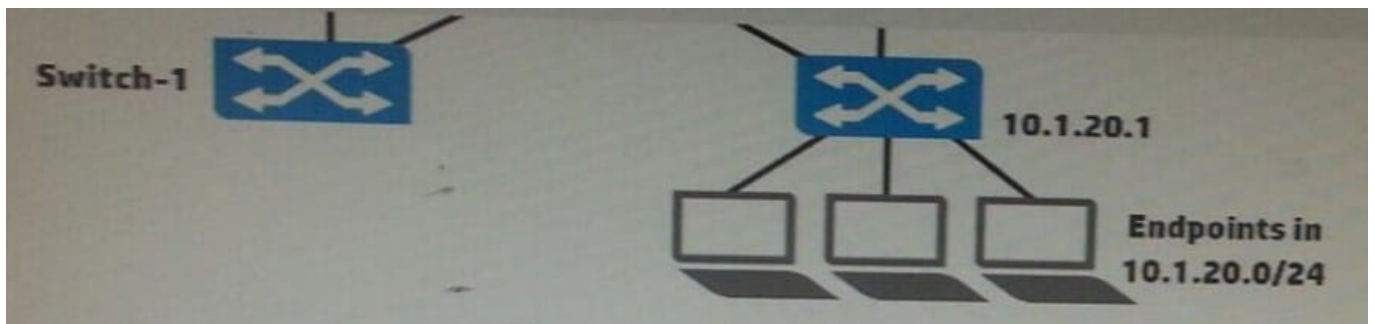


Exhibit 2

```
Switch-1(config)# show ip route
```

IP Route Entries						
Destination	Gateway	Vlan	Type	Sub-Type	Metric	Dist.
10.0.1.0/24	VLAN101	101	connected		1	0
10.0.2.0/24	VLAN201	201	connected		1	0
10.1.10.0/24	VLAN10	10	connected		1	0
10.1.20.0/24	10.0.1.1	101	static		1	1
127.0.0.0/8	reject		static		0	0
127.0.0.1/32	lo0		connected		1	0

A network administrator wants to create a backup IP route to 10.1.20.0/24 on Switch-1. The backup route should use Link 2, and it should only be used if Link 1 is down. What is the correct setup to accomplish this?

- A. an IP route through 10.0.2.2 with administrative distance 1
- B. an IP route through 10.1.20.1 with administrative distance 1
- C. an IP route through 10.0.2.2 with administrative distance 10
- D. an IP route through 10.1.20.1 with administrative distance 10

Correct Answer: D

[HP0-Y52 PDF Dumps](#)

[HP0-Y52 Study Guide](#)

[HP0-Y52 Braindumps](#)