

HP2-Z34^{Q&As}

Building HP FlexFabric Data Centers

Pass HP HP2-Z34 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/hp2-z34.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

An administrator configures an HP Comware switch to support FCoE in Fibre Channel Forwarder (FCF) mode. A switch interface connects to a server FC host bus adapter (HBA). What is the correct configuration for this port?

- A. bound to a VFC interface, which is in F mode
- B. bound to a VFC interface, which is in E mode
- C. FC port >n F mode
- D. FC port in NP mode

Correct Answer: B

QUESTION 2


To provide redundancy, a company has multiple data centers that use server virtualization. What is a networking requirement for this scenario?

- A. less bandwidth at the server access layer and more bandwidth at the distribution layer than in a nonvirtualized network
- B. physical network segmentation and isolation implemented at Layers 1 through 7
- C. localized storage volumes that are isolated within each data center
- D. extension of Layer 2 connectivity across the data centers

Correct Answer: D

QUESTION 3

Refer to the exhibit

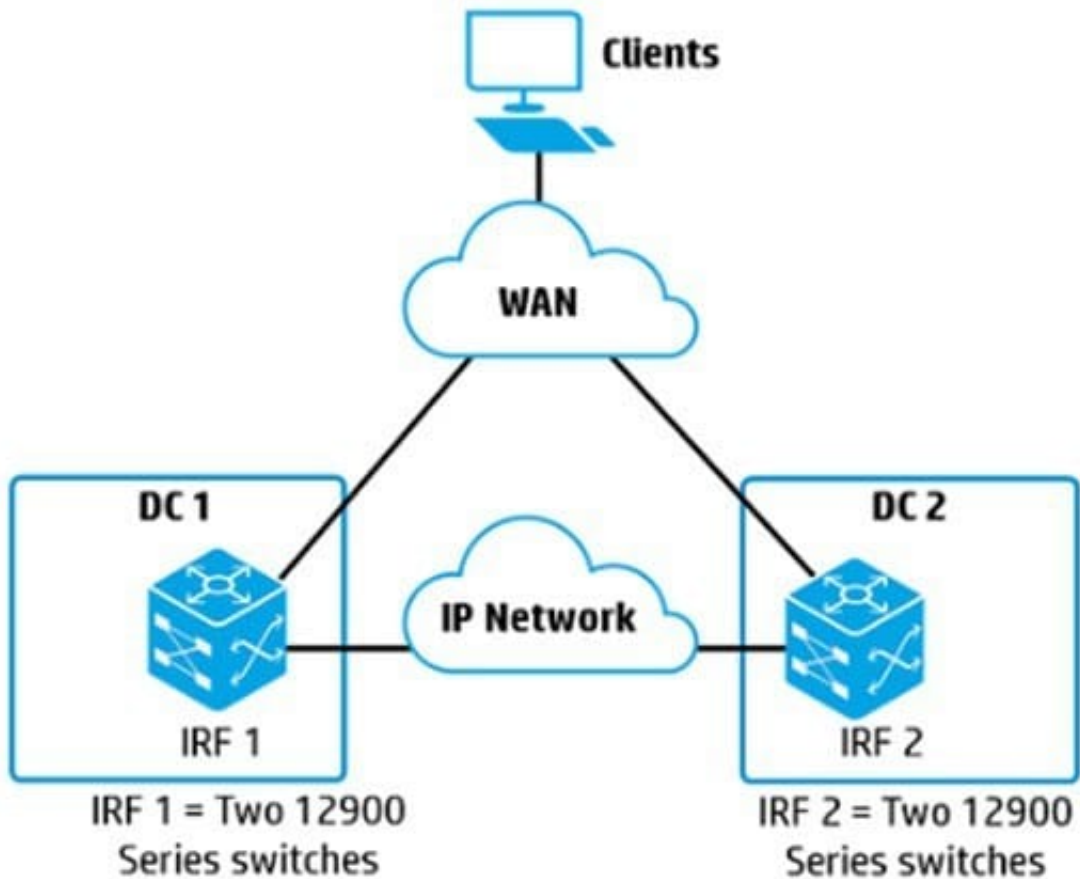

The exhibit displays a company with two data centers that connect by using EVI. The company needs a redundant solution for routing traffic between the subnets.

What is the best way to accomplish this goal?

- A. Run Virtual Router Redundancy Protocol (VRRP) on the data center subnets
- B. Place the EVI tunnel interface on each IRF virtual device in a different VPN instance, and then set up routing on each device by using the same IP addresses.
- C. Use TRILL on the EVI network.
- D. Combine IRF 1 and IRF 2 into the same IRF virtual device, and set up routing on that device

Correct Answer: B

QUESTION 4

An administrator is configuring an HP switch to run SPBM. Which Spanning Tree Protocol (STP) configuration is required?

- A. Disable STP.
- B. Ensure that the switch with the lowest IS-IS router ID has the lowest bridge priority.

C. Set the spanning tree mode to ECT.

D. Map all B-VLANs to MSTP instance 4092

Correct Answer: D

QUESTION 5

A multi-tenant data center with 12 tenants has the following goals:

Isolate tenants to enable each tenant to have its own routing space

Isolate the data center's services in its own routing space.

Allow for some leaking of route information among tenants and company services

Which feature should be configured on the data center routing switches?

A. MPLS

B. VPLS

C. MDC

D. Multi-VPN-Instance CE (MCE)

Correct Answer: C

[HP2-Z34 Practice Test](#)

[HP2-Z34 Study Guide](#)

[HP2-Z34 Exam Questions](#)