

# HPE0-S60<sup>Q&As</sup>

Delta - HPE Compute Solutions

**Pass HP HPE0-S60 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/hpe0-s60.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers




**QUESTION 1**

**HOTSPOT**


After deploying HPE Superdome Flex 280 you need to check Core Analysis Engine (CAE) Log.

Click the appropriate section in the HPE Superdome Flex 280 management interface that will allow you to complete this task.

Hot Area:

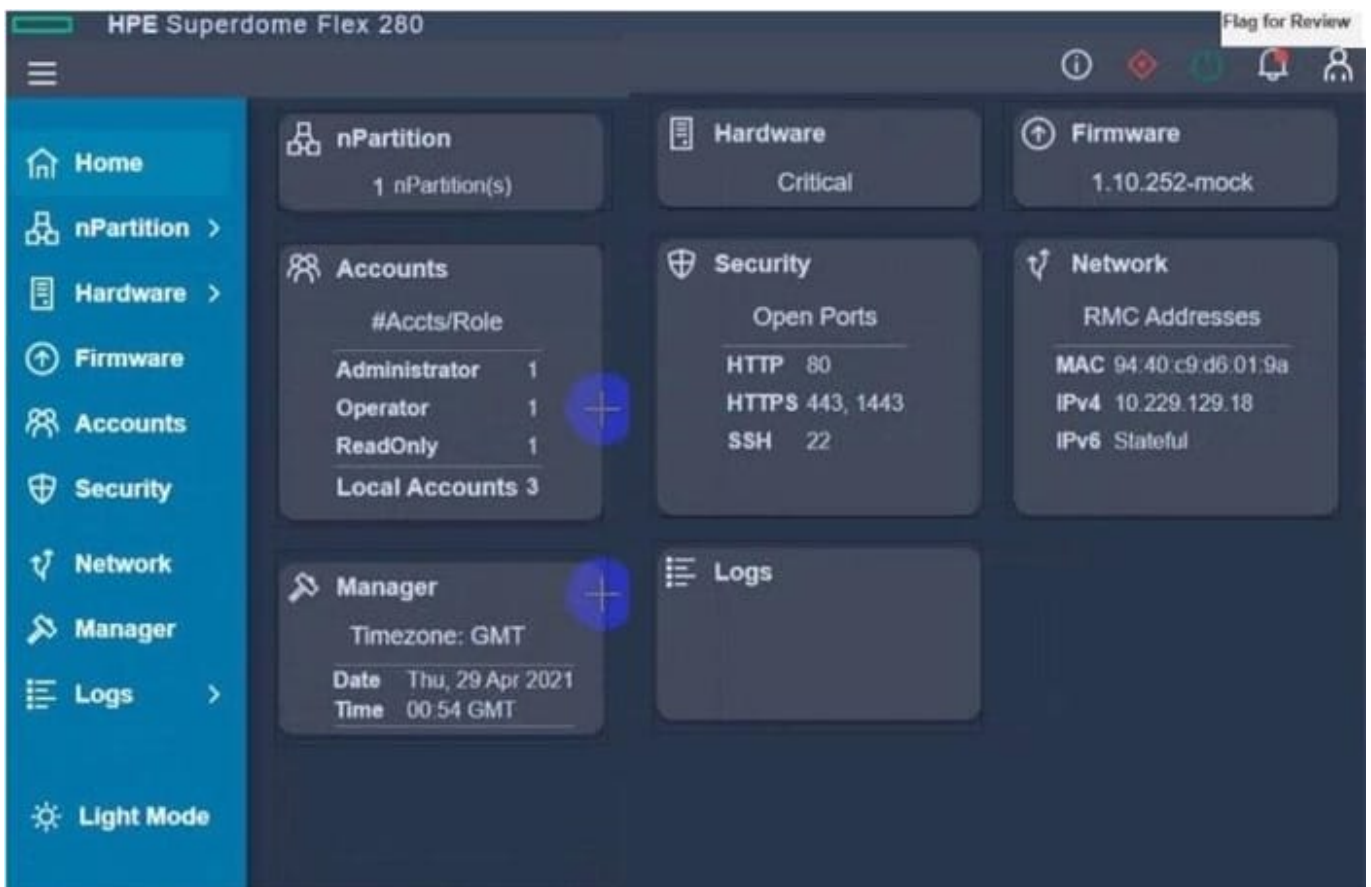

Correct Answer:

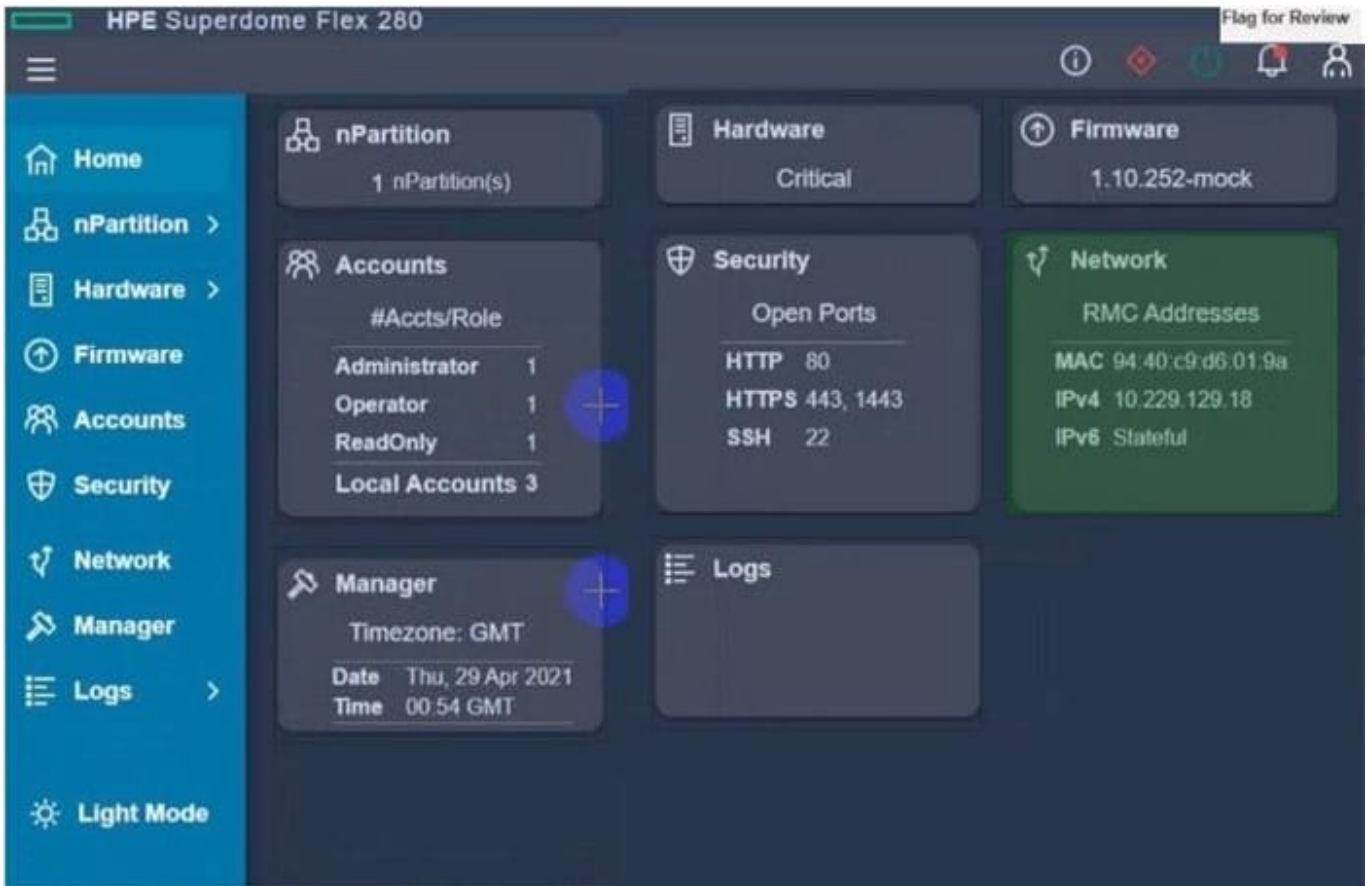

**QUESTION 2**

DRAG DROP

Match HPE SimpliVity team with the definition.

Select and Place:

Term	Definition
Arbiter	Non-hyperconverged servers that can exist in an HPE SimpliVity environment and provide additional compute capacity while consuming the storage provided by the hyperconverged nodes.
Compute node	Provides centralized management and events end-point for vCenter.
Intelligent Workload Optimizer	Integrates with VMware Distributed Resources Scheduler to ensure optimal placement of the VM compute resources.
Management Virtual Controller	Facilitates communication between nodes and resolves state conflicts to ensure service continuity.

Correct Answer:

Term	Definition
Arbiter	Non-hyperconverged servers that can exist in an HPE SimpliVity environment and provide additional compute capacity while consuming the storage provided by the hyperconverged nodes.
Compute node	Provides centralized management and events end-point for vCenter.
Management Virtual Controller	Integrates with VMware Distributed Resources Scheduler to ensure optimal placement of the VM compute resources.
Intelligent Workload Optimizer	Facilitates communication between nodes and resolves state conflicts to ensure service continuity.

**QUESTION 3**

HOTSPOT

An HPE Synergy customer needs to prevent a timeout and loss of communication during an external switch firmware upgrade.

Click the parameter that the customer should configure within an uplink set to meet this requirement.

Hot Area:

### Create Uplink Set ?

---

#### General

Name	<input type="text" value="Prod-US"/>
Consistency checking	<input type="text" value="Exact match"/>
Type	<input type="text" value="Ethernet"/>
Connection mode	Automatic
LACP timer	<input type="text" value="Short (1s)"/>
LACP load balancing	<input type="text" value="Source &amp; Destination MAC Address"/>
LACP failover trigger	<input type="text" value="All active uplinks transition to offline"/>
LACP distribute uplink ports	<input checked="" type="checkbox"/>

Correct Answer:

**Create Uplink Set** ?

**General**

Name:

Consistency checking:

Type:

Connection mode: Automatic

LACP timer:

LACP load balancing:

LACP failover trigger:

LACP distribute uplink ports:

**QUESTION 4**

DRAG DROP

Put the steps of the HPE infosight flow in the correct order.

Select and Place:

**Steps**


- Observing
- Learning
- Recommending
- Predicting
- Acting

**Answer Area**

- 
- 
- 
- 
- 

Correct Answer:



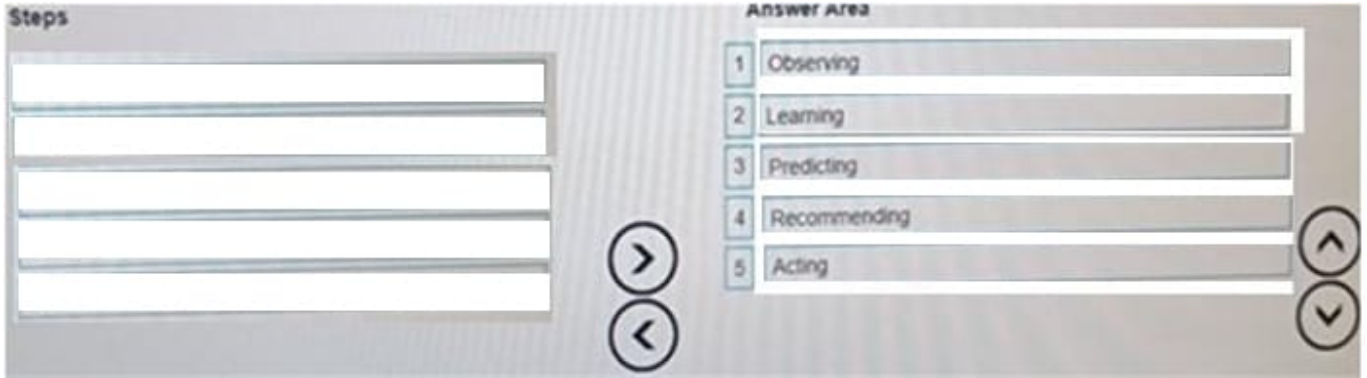

**QUESTION 5**

DRAG DROP

Match HPE SimpliVity term with the definition.

Select and Place:



Correct Answer:

