

# HPE6-A75<sup>Q&As</sup>

Aruba Certified Edge Professional Exam

**Pass HP HPE6-A75 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/hpe6-a75.html>

100% Passing Guarantee  
100% Money Back Assurance


Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

Refer to the exhibit.

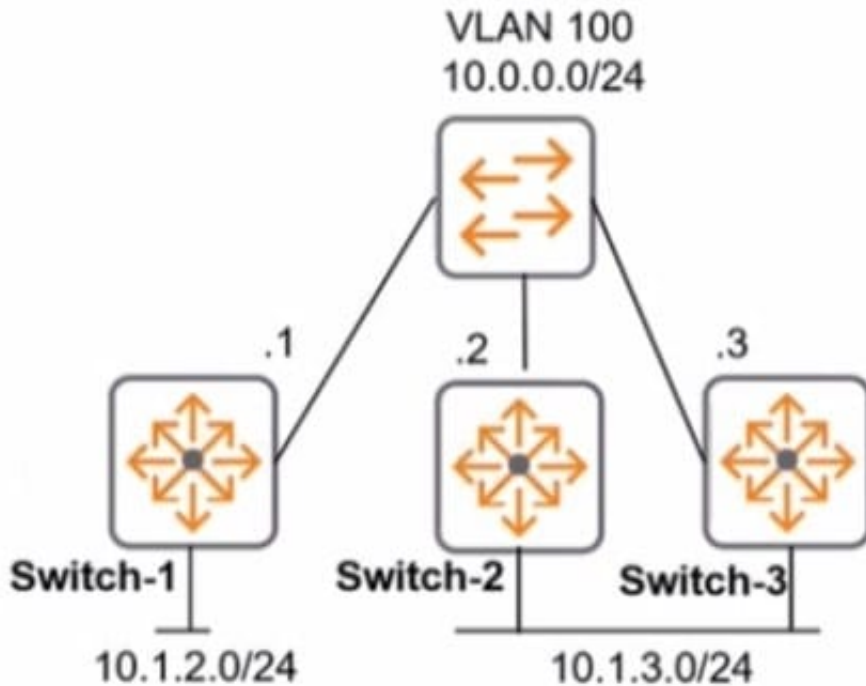

The network administrator wants to reduce failover time If a switch link m VIAN 100 goes down. What should the administrator do?

- A. Configure echo mode BFD on VLAN 100 on all OSPF routing devices on VLAN 100.
- B. Lower the dead timer on the BDR of VLAN 100.
- C. Lower the hello timer only on the BDR of VLAN 100.
- D. Configure graceful restart on all of the OSPF routing devices on VLAN 100.

Correct Answer: A

**QUESTION 2**

Refer to the exhibit.

```
Switch-1(config)# show running-config interface 1-20
Running configuration:

interface 1
  untagged vlan 20
  aaa port-access authenticator
  exit
#output the same for interfaces 2-20
```

Several interfaces on an AOS-Switch enforce 802.1X to a RADIUS server at 10.254.378.521. The interface

802.1X settings are shown in the exhibit, and 802.1X is also enabled globally. The security team have added a requirement for port security on the interfaces as well. Before administrators enable port security, which additional step must they complete to prevent issues?

- A. Set an 802.1X client limit on the interfaces.
- B. Manually add legitimate MAC addresses to the switch authorized MAC list.
- C. Enable eavesdropping protection on the interfaces.
- D. Enable DHCP snooping on VLAN 20.

Correct Answer: D

---

### QUESTION 3

An administrator mistakenly configures the wrong VLAN setting on a managed controller's interface. This causes the controller to lose management access to the Mobility Master (MM).

Which mechanism will then attempt to restore the previous working configuration on the managed controller?

- A. disaster recovery
- B. auto-rollback
- C. restore config
- D. bulk configuration

Correct Answer: B

---

### QUESTION 4

A customer wants to implement Virtual IP redundancy, such that in case of a ClearPass server outage, 802.1x authentications will not be interrupted. The administrator has enabled a single Virtual IP address on two ClearPass servers.

Which statements accurately describe next steps? (Select two.)

- A. The NAD should be configured with the primary node IP address for RADIUS authentication on the 802.1x network.
- B. A new Virtual IP address should be created for each NAD.
- C. Both the primary and secondary nodes will respond to authentication requests sent to the Virtual IP address when the primary node is active.
- D. The primary node will respond to authentication requests sent to the Virtual IP address when the primary node is active.
- E. The NAD should be configured with the Virtual IP address for RADIUS authentications on the 802.1x network.

Correct Answer: DE

---

#### QUESTION 5

An administrator needs to authenticate users connected to an ArubaOS Switch where the switch authenticates the user, assigns the firewall policies to the user, and processes some of the users\' traffic. Which connection method should the administrator configure on the ArubaOS-Switch?

- A. Per-user tunneled mode
- B. Split-tunneled mode
- C. Per-port tunneled mode
- D. VLAN tunneled mode

Correct Answer: C

[Latest HPE6-A75 Dumps](#)

[HPE6-A75 Exam Questions](#)

[HPE6-A75 Braindumps](#)