

# HPE6-A79<sup>Q&As</sup>

Aruba Certified Mobility Expert Written Exam

**Pass HP HPE6-A79 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/hpe6-a79.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

A software development company has 764 employees who work from home. The company also has small offices located in different cities throughout the world. During working hours, they use RAPS to connect to a datacenter to upload software code as well as interact with databases.

In the past two month, cabling issues have occurred connection to the 7240XM Mobility Controller (MC) that runs ArubaOS 8 and terminates the RAPS. These RAPS disconnect, affecting the users connected to the RAPS. This also causes problems with code uploads and database synchronizations. Therefore, the company decides to add a second 7240XM controller for redundancy.

How should the network administrator deploy both controllers in order to provide the redundancy while preventing failover events from disconnecting users?

- A. Connect both controllers with common VLANs, and create an HA fast failover group with public addresses in the internet VLAN.
- B. Connect both controllers with common VLANs, and create an L2-connected cluster using public addresses in the internet VLAN.
- C. Connect both controllers with different VLANs, and create an L2-connected cluster using public addresses in the internet VLAN.
- D. Connect both controllers with common VLANs, and configure LMS/BLMS values equal to public addresses in the internet VLAN.

Correct Answer: A

**QUESTION 2**

Refer to the exhibit.

```
xx:xx:xx:xx:xx:xx# sh dhcp subnets
```

DHCP Subnet Table

VLAN	Type	Subnet	Mask	Gateway	Mode	Rolemap
124	13	10.21.124.32	255.255.255.224	10.21.124.33	local, split-tunnel	
81	12	0.0.0.0	255.255.255.255	0.0.0.0	remote, full-tunnel	


A network engineer deploys two different DHCP pools in an Instant AP (IAP) cluster for WLANs that will have connectivity to a remote site using Aruba IPsec. Based on the output shown in the exhibit, which IAP-VPN DHCP modes are being used?

- A. distributed L3 and centralized L2
- B. local L3 and centralized L2
- C. local L3 and distributed L2
- D. centralized L3 and distributed L2

Correct Answer: D

**QUESTION 3**

Refer to the exhibit.

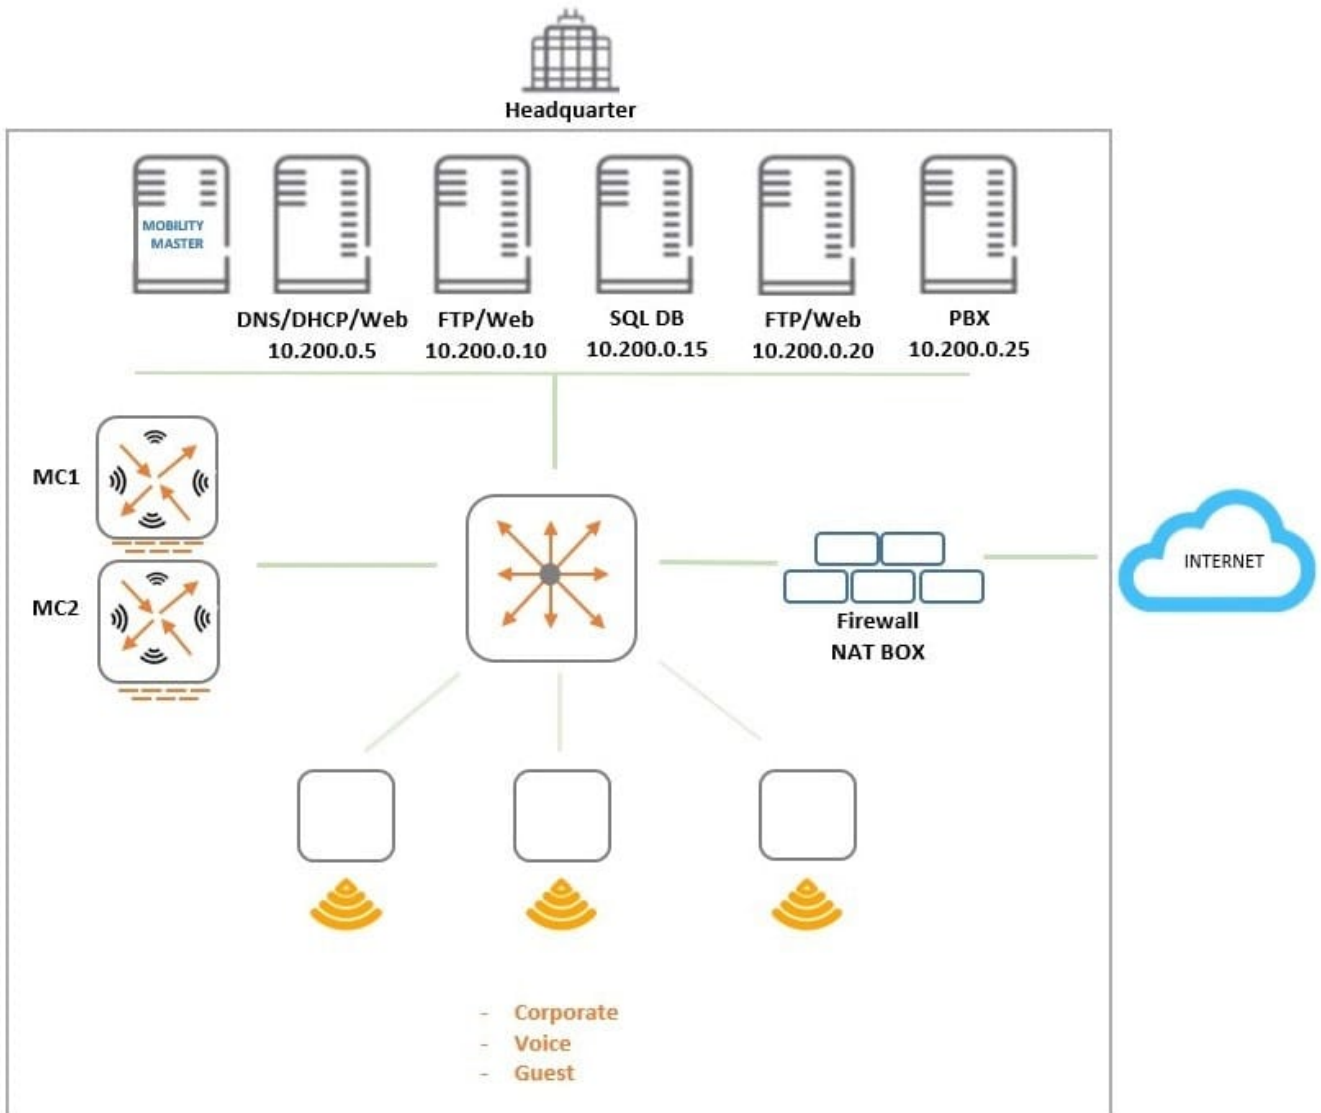

An organization provides WiFi access through a corporate SSID with an Aruba Mobility Master (MM) - Mobility Controller (MC) network that includes PEF functions. The organization wants to have a single firewall policy configured and applied

to the employee role.

This policy must allow users to reach Web, FTP, and DNS services, as shown in the exhibit. Other services should be exclusive to other roles. The client NICs should receive IP settings dynamically.

Which policy design meets the organization's requirements while minimizing the number of policy rules?

- A.
- ```
netdestination alias1
  host 10.200.0.5
  host 10.200.0.10
  host 10.200.0.20

netdestination alias2
  host 10.200.0.10
  host 10.200.0.20

ip access-list session policy1
  user host 10.200.0.5 svc-dns permit
  user alias alias1 svc-http permit
  user alias alias2 svc-ftp permit
```
- B.
- ```
netdestination alias1
  host 10.200.0.10
  host 10.200.0.20

ip access-list session policy1
  any any svc-dhcp permit
  user host 10.200.0.5 svc-dns permit
  user host 10.200.0.5 svc-http permit
  user alias alias1 svc-http permit
  user alias alias1 svc-ftp permit
```
- C.
- ```
netdestination alias1
  host 10.200.0.5
  host 10.200.0.10
  host 10.200.0.20

netdestination alias2
  host 10.200.0.10
  host 10.200.0.20

ip access-list session policy1
  any any svc-dhcp permit
  user host 10.200.0.5 svc-dns permit
  user alias alias1 svc-http permit
  user alias alias2 svc-ftp permit
```
- D.
- ```
netdestination alias1
  host 10.200.0.10
  host 10.200.0.20

ip access-list session policy1
  user host 10.200.0.5 svc-dns permit
  user host 10.200.0.5 svc-http permit
  user alias alias1 svc-http permit
  user alias alias1 svc-ftp permit
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Correct Answer: C

---

#### QUESTION 4

An organization has several RAPs at different locations that broadcast two SSIDs. The internet-only SSID is in bridge/always mode, and the corporate SSID is in split-tunneling/standard mode. The network administrator deploys 10 more

RAPs in different locations.

Users can successfully connect to the corporate SSID that is propagated by a RAP at a remote location. However, they report that it takes too long to access public internet web sites.

What is one part of the configuration that should be checked by the network administrator to verify this RAP deployment?

- A. User roles policies
- B. IP pool
- C. Operating mode
- D. Assigned VLAN

Correct Answer: A

---

#### QUESTION 5

Users run Skype for Business on wireless clients with no WMM support over an Aruba Mobility Master (MM) - Mobility Controller (MC) based network. When traffic arrives at the wired network, it does not include either L2 or L3 markings.

Which configuration steps should the network administrator take to classify and mark voice and video traffic with UCC heuristics mode?

- A. Enable WMM in a VAP profile, and explicitly permit voice and video UDP ports in a firewall policy.
- B. Confirm OpenFlow is enabled in the user role and VAP profile. Then enable WMM in a SSID profile, and explicitly permit voice and video UDP ports in a firewall policy.
- C. Confirm the MC is the Openflow controller of the MMs and Openflow is enabled in VAP and firewall roles. Enable Skype4Business ALG in UCC profiles.
- D. Confirm MM is the Openflow controller of MCs and Openflow is enabled in VAP and firewall roles. Enable

Skype4Business ALG in UCC profiles.

Correct Answer: A

[HPE6-A79 Study Guide](#)

[HPE6-A79 Exam Questions](#)

[HPE6-A79 Braindumps](#)