

JN0-1301^{Q&As}

Data Center Design, Specialist (JNCDS-DC)

Pass Juniper JN0-1301 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/jn0-1301.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

You are implementing a Virtual Chassis Fabric using QFX5110 devices.

Which two statements are true in this scenario according to Juniper Networks recommendations? (Choose two.)


- A. Spine devices must assume the RE role.
- B. Leaf devices must have a direct link to all other leaf devices.
- C. Spine devices must assume the line card role.
- D. Leaf devices must have a direct link to all spine devices.

Correct Answer: AD

QUESTION 2

Click the Exhibit button.

Referring to the exhibit, what must you change to make the topology a supported Virtual Chassis Fabric design?

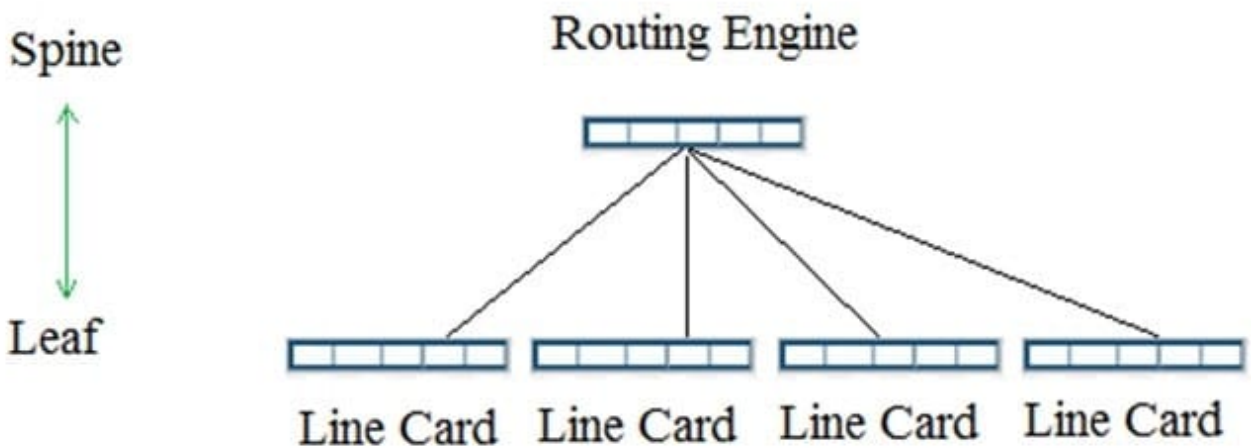

- A. Change the Routing Engine to a line card.
- B. Remove one leaf node.
- C. Add a second spine node.

D. Change one of the line cards to a VCP master instance.

Correct Answer: C

QUESTION 3

You are designing an IP fabric using EBGp.

In this scenario, what are two ways of designing the ASN scheme for the IP fabric? (Choose two.)

- A. Assign the same ASN to all devices.
- B. Assign the ASN to all leaf devices and a separate ASN to all spine devices.
- C. Assign a unique ASN to each individual device.
- D. Assign the same ASN used by the WAN service provider to the spine devices.

Correct Answer: CD

QUESTION 4

What would you use to balance traffic loads between servers in a Clos Layer 3 data center fabric?

- A. MC-LAG
- B. multicast protocols
- C. ECMP routing
- D. BGP export policies

Correct Answer: C

QUESTION 5

Which two statements are true about IP fabrics? (Choose two.)

- A. IP-based applications do not require an overlay network to maintain connectivity.
- B. Applications that require security needs an overlay to provide the security.
- C. Applications that require Layer 2 adjacencies require an overlay network to maintain connectivity.
- D. IP fabrics can natively support both Layer 2 and Layer 3 applications.

Correct Answer: CD
