

JN0-349^{Q&As}

Enterprise Routing and Switching - Specialist (JNCIS-ENT)

Pass Juniper JN0-349 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/jn0-349.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

Click the Exhibit button.

```
{master:0} [edit protocols rstp]
user@Switch-1# show
bridge-priority 32k;
interface ge-0/0/1 {
    priority 128;
    cost 20000;
}
interface ge-0/0/8 {
    priority 128;
    cost 20000;
}
{master:0} [edit protocols rstp]
user@Switch-2# show
bridge-priority 32k;
interface ge-0/0/1 {
    priority 16;
    cost 20000;
}
interface ge-0/0/10 {
    priority 16;
    cost 20000;
}
{master:0} [edit protocols rstp]
user@Switch-3# show
bridge-priority 32k;
interface ge-0/0/8 {
    priority 16;
    cost 20000;
}
interface ge-0/0/10 {
    priority 16;
    cost 20000;
}
}
```

You are responsible for managing a Layer 2 network using RSTP for loop prevention. You recently committed the configurations shown in the exhibit. Unfortunately, Switch-2 became the root bridge and you must ensure that Switch-1 becomes the root bridge, when available, for this RSTP topology.


Referring to the exhibit, which configuration change should be performed?

- A. Configure the ge-0/0/1 and ge-0/0/8 interfaces on Switch-1 to have a priority of 255.
- B. Configure the system MAC on Switch-1 to be higher than the other two switches.
- C. Configure the bridge-priority on Switch-1 as 4k.
- D. Configure the ge-0/0/1 and ge-0/0/8 interfaces on Switch-1 to have a cost of 0.

Correct Answer: D

QUESTION 2

Exhibit.

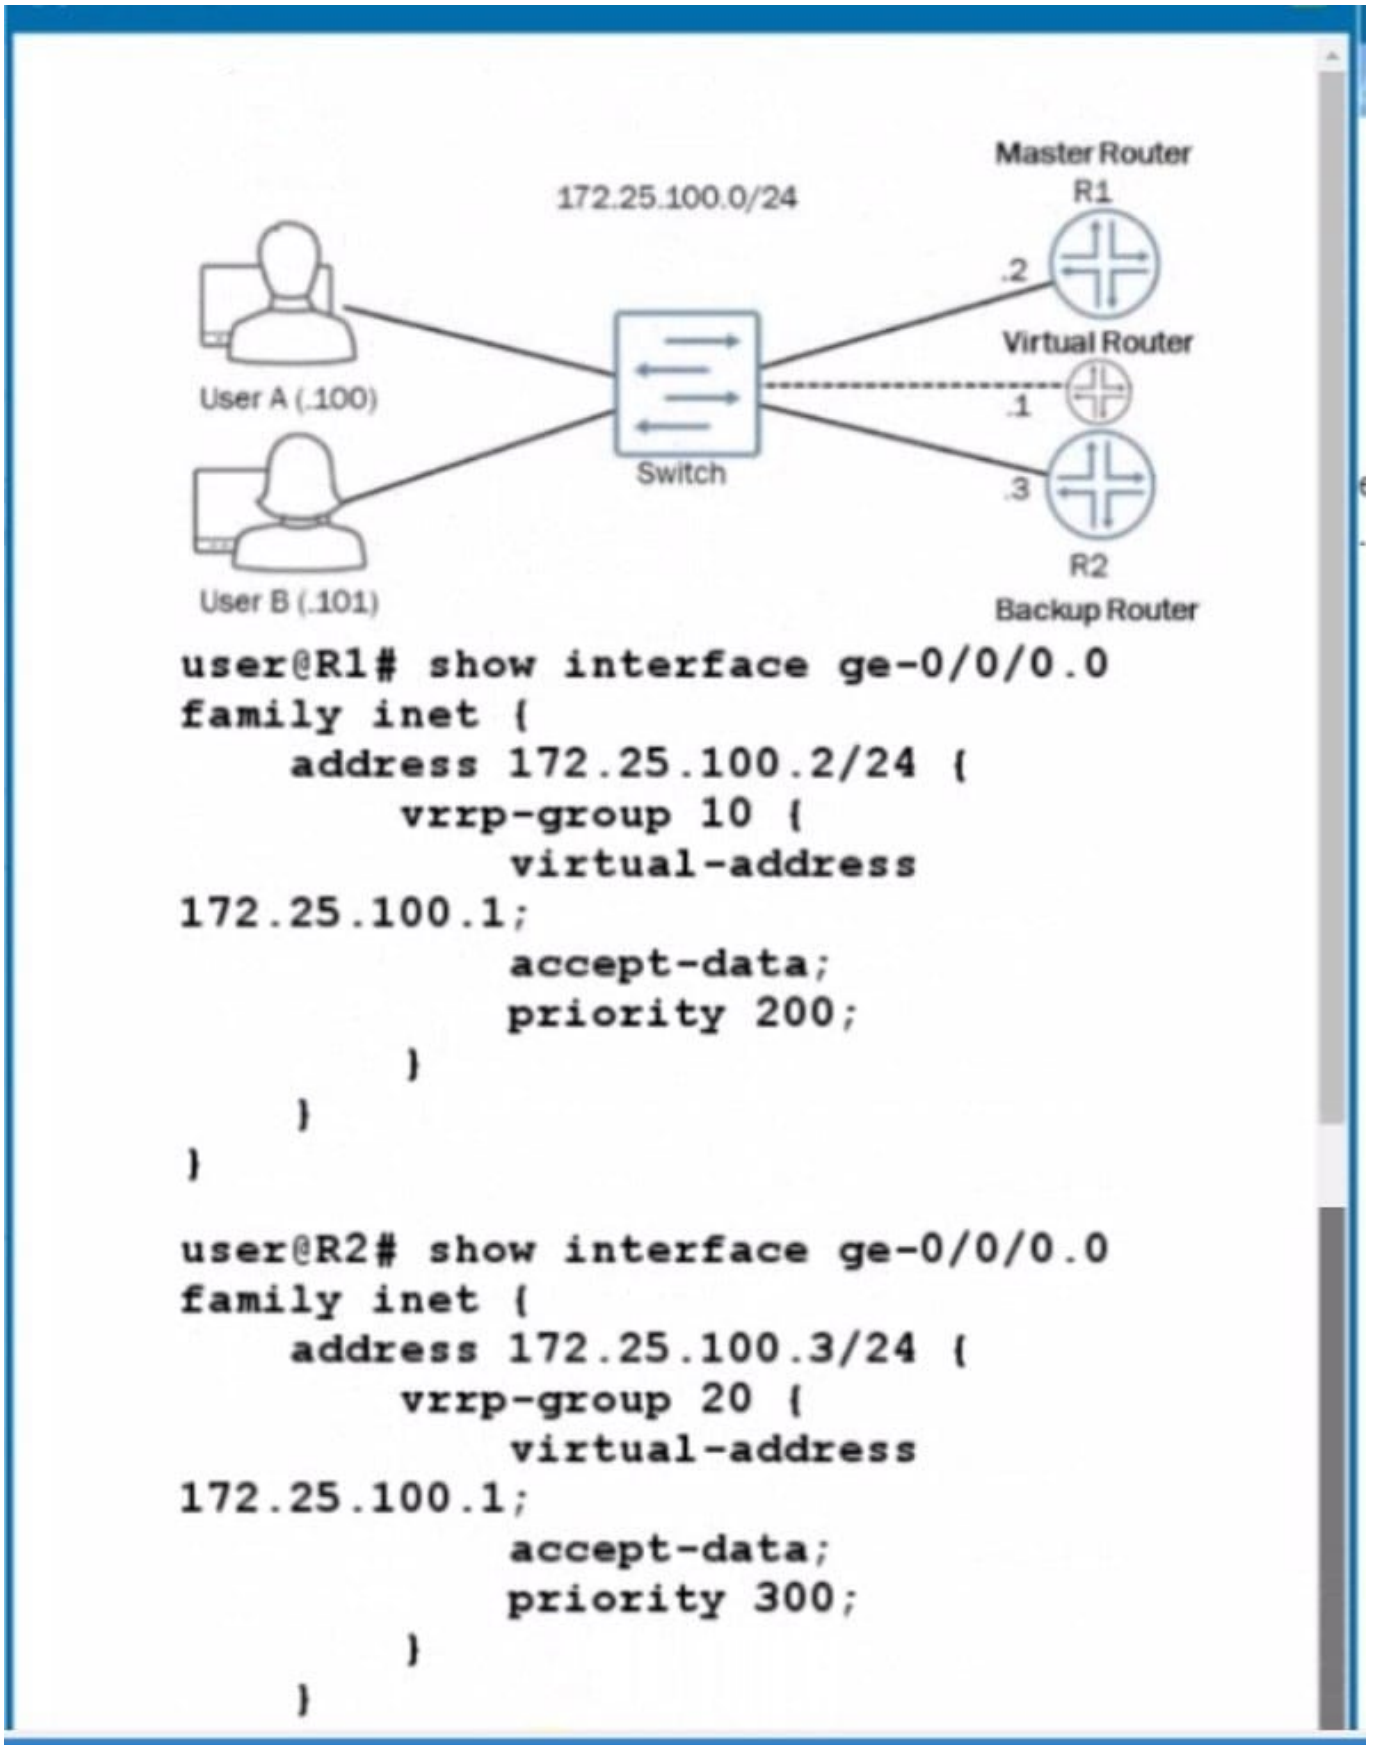

You are attempting to set up VRRP with R1 and R2 being participating members. You want R1 to be the master router

and R2 to be the backup router with the virtual router they create being at address 172.25.100.1. The virtual router is not pinging from either User A or User B.

Referring to the exhibit, what must be done to correct the problem?

- A. The VRRP group value on R1 and R2 must match.
- B. A VRRP authentication type value is needed on R1 and R2.
- C. A VRRP policy is needed on R1 and R2.
- D. The VRRP priority value on R1 and R2 must match

Correct Answer: A

https://www.juniper.net/documentation/en_US/junos/topics/reference/configuration-statement/priority-edit-interfaces-vrrp.html

QUESTION 3

You are configuring IBGP and you must ensure that reachability is maintained between participating routers, even if the physical topology changes.

Which two actions should you perform in this scenario? (Choose two.)

- A. Configure DHCP on all IBGP devices.
- B. Configure an IGP within your IBGP network.
- C. Configure static routes to all IBGP peers.
- D. Configure IBGP peerings to loopback addresses.

Correct Answer: BD

QUESTION 4

You notice that currently two MAC addresses are associated with a single access port in the bridge table of one of your EX Series switches.


What are two explanations for this behavior? (Choose two.)

- A. The native VLAN feature has been associated with the access port.
- B. The mac-move-limit feature has been disabled on the access port,
- C. The access port connects to an IP phone which connects to a host device
- D. The access port connects to multiple hosts through a rogue device

Correct Answer: AD

QUESTION 5

Click the Exhibit button.

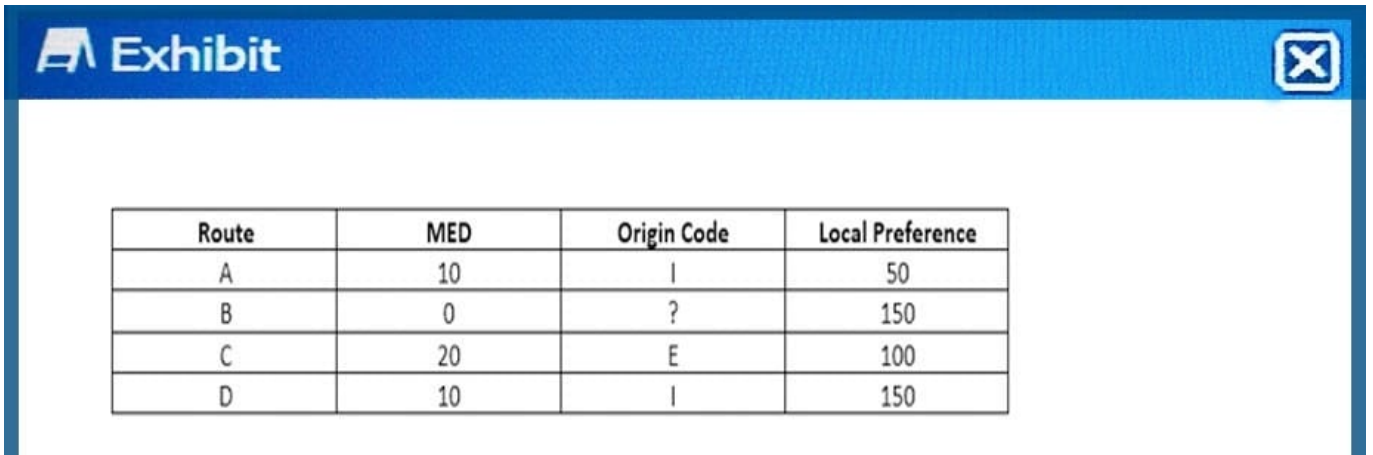

Route	MED	Origin Code	Local Preference
A	10	I	50
B	0	?	150
C	20	E	100
D	10	I	150

A routing table contains multiple BGP routes to the same destination prefix. The route preference is the same for each route.

Referring to the exhibit, which route would be selected?

- A. route B
- B. route D
- C. route A
- D. route C

Correct Answer: B