

JN0-648^{Q&As}

Enterprise Routing and Switching, Professional (JNCIP-ENT)

Pass Juniper JN0-648 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/jn0-648.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

Click the Exhibit button.

```

user@R1> show pim rps
Instance: PIM.master

address-family INET
RP address      Type      Mode      Holdtime  Timeout  Groups  Group prefixes
10.222.1.2      bootstrap sparse    150       146       0        224.0.0.0/4


address-family INET6

user@R2> show route 10.0.1.1

inet.0: 20 destinations, 20 routes (20 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.0.1.0/24    *[OSPF/10] 00:07:30, metric 2
               > to 10.222.0.10 via ge-1/1/4.200

user@R2> show pim statistics | match "register|type"
PIM Message type      Received Sent Rx errors
V2 Register           0       0       0
V2 Register Stop      0       0       0
V1 Register           0       0       0
V1 Register Stop      0       0       0
AutoRP Unknown type   0       0       0
Anycast Register      0       0       0
Anycast Register Stop 0       0       0
    
```

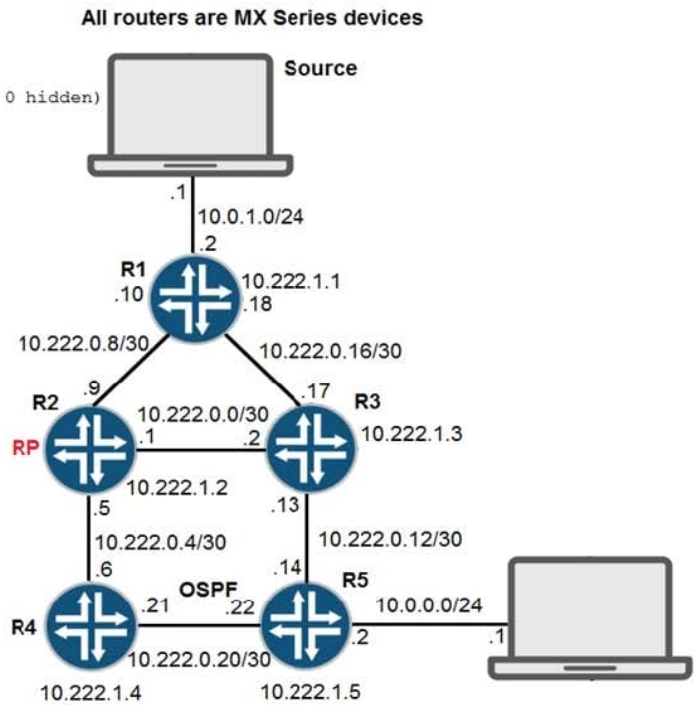

Referring to the exhibit, the source is currently sending multicast traffic using group 224.1.1.1, which is being received by R1. R2 is not receiving PIM register messages.

What would be the cause of this problem?

- A. Tunnel services have not been enabled on R1.
- B. All routers have not been configured with the same Auto-RP discovery group.
- C. R5 has not received an IGMP report of 224.1.1.1.
- D. A(*,G) tree has not been built yet.

Correct Answer: C

QUESTION 2


In a Layer 2 environment where 802.1X is deployed, which two statements are correct? (Choose two.)

- A. RADIUS messages are exchanged between the supplicant and the authenticator.
- B. RADIUS messages are exchanged between the authenticator and the authentication server.
- C. Extensible Authentication Protocol messages are exchanged between the authenticator and the authentication server.
- D. Extensible Authentication Protocol messages are exchanged between the supplicant and the authenticator.

Correct Answer: BD

QUESTION 3

Click the Exhibit button.

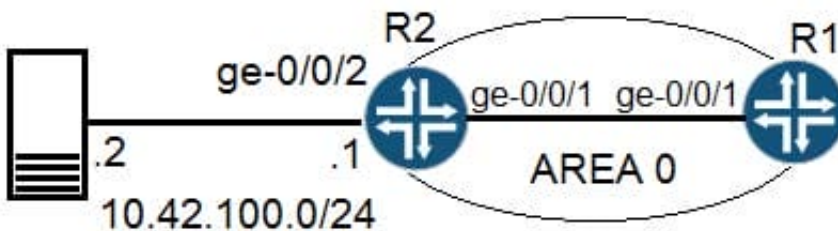

```
user@R1> show route 10.42.100.0

inet.0: 61 destinations, 64 routes (61 active, 0
holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

10.42.100.0/24 * [OSPF3/150] 00:00:11, metric 0, tag 0
> to 10.42.18.1 via ge-0/0/1.0
```

Referring to the exhibit, how is R1 learning the route from R2?

- A. R2 has an export policy with external type 2 configured.
- B. R2 has interface ge-0/0/2 configured as a passive interface under OSPFv3.
- C. R2 has interface ge-0/0/2 configured in another area under OSPFv3.
- D. R2 has an export policy with external type 1 configured.

Correct Answer: D

QUESTION 4


You want to route Layer 3 PVLAN traffic within the secondary VLAN. What is required to accomplish this task?

- A. an FBF policy
- B. an IRB
- C. a community VLAN
- D. an isolated VLAN

Correct Answer: B

QUESTION 5

Click the Exhibit button.

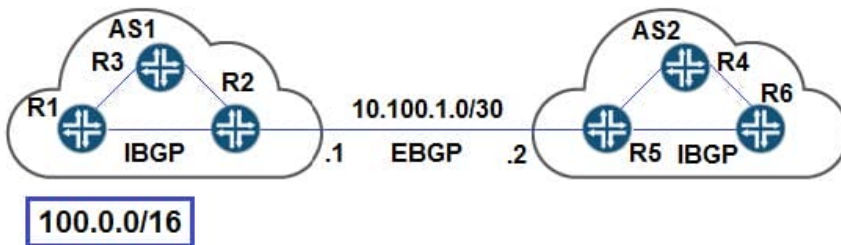

```
user@R2> show route 100.0.0.0/16 terse
```

```
inet.0: 1400327 destinations, 14000327 routes (14000326 active, 0 holddown, 1 hidden)
+= Active Route, - = Last Active, * = Both
```

A	V	Destination	P	Prf	Metric 1	Metric 2	Next hop	AS path
*		100.0.0.0/24	I	165	100		>10.254.31.2	
			B	170	100		>10.254.31.2	I
*		100.0.1.0/24	I	165	100		>10.254.31.2	
			B	170	100		>10.254.31.2	I
*		100.0.2.0/24	I	165	100		>10.254.31.2	
			B	170	100		>10.254.31.2	I
*		100.0.3.0/24	I	165	100		>10.254.31.2	
			B	170	100		>10.254.31.2	I
*		100.0.4.0/24	I	165	100		>10.254.31.2	
			B	170	100		>10.254.31.2	I
*		100.0.5.0/24	I	165	100		>10.254.31.2	
			B	170	100		>10.254.31.2	I
.

Referring to the exhibit, you must advertise the 100.0.0.0/16 routes from AS1 to AS2, but R2 is not advertising any BGP routes to R5.

Why is this happening in this scenario?

- A. The IBGP routes will not be advertised because you must use a policy to advertise IBGP routes.
- B. The IBGP routes are not active and EBGP will advertise only active routes.

- C. The IBGP routes will not be advertised because the AS path shows as incomplete.
- D. The IBGP routes are not active because the next hop is not reachable.

Correct Answer: B

[Latest JN0-648 Dumps](#)

[JN0-648 VCE Dumps](#)

[JN0-648 Practice Test](#)