

JN0-662^{Q&As}

Service Provider Routing and Switching - Professional (JNCIP-SP)

Pass Juniper JN0-662 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/jn0-662.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

Click the Exhibit button.

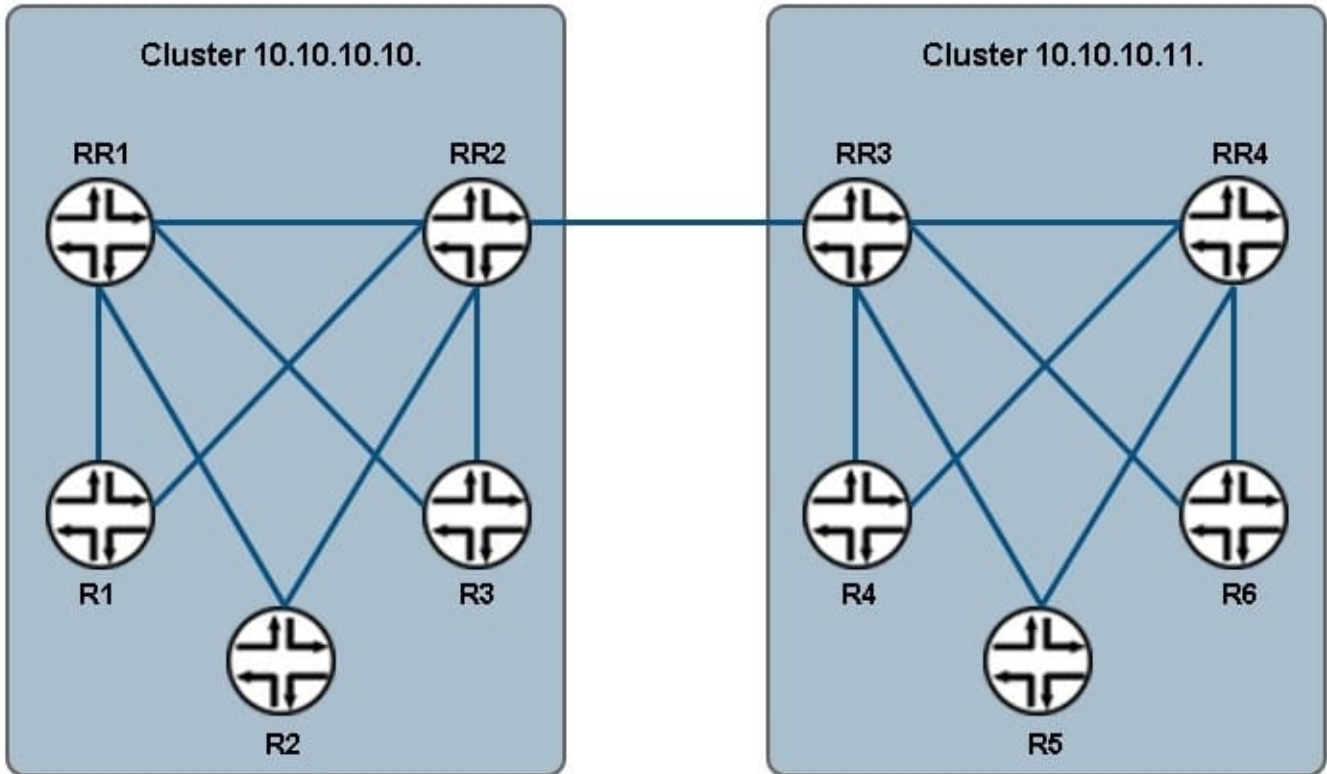

Referring to the exhibit, RR1-RR4 are route reflectors.


Which three routers would RR1 need to peer with if the no-client-reflect parameter has been configured? (Choose three.)

- A. R2
- B. R5
- C. RR4
- D. R6
- E. R1

Correct Answer: ACE

QUESTION 2

Click the Exhibit button.

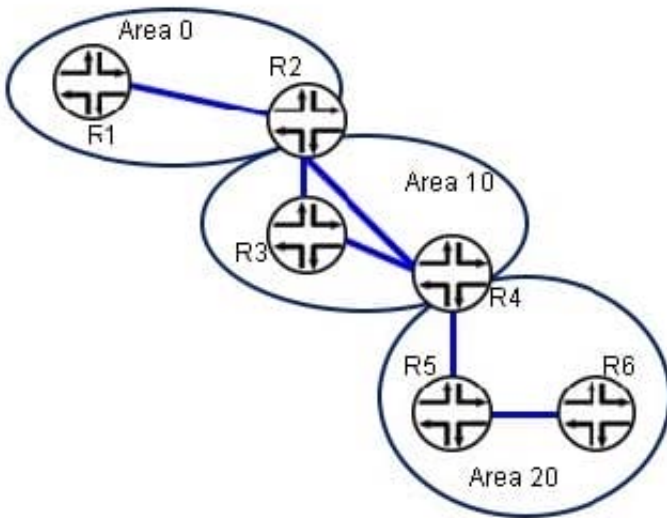

Referring to the exhibit, you want to ensure that routers in Area 20 can connect to routers in Area 0.

Which two steps must be done to allow this behavior? (Choose two.)

- A. A virtual link must be configured under R2 Area 0 and R4 Area 0.
- B. Area 10 must be configured as a stub area.
- C. A virtual link must be configured under R2 Area 0 and R4 Area 20.
- D. Area 10 must be configured as a standard area.

Correct Answer: AD

QUESTION 3

Which authentication strategy authenticates IS-IS hello PDUs only?

- A. interface authentication
- B. area authentication
- C. domain authentication
- D. level authentication

Correct Answer: D

QUESTION 4

Which neighbor state indicates that two BGP neighbors have full connectivity?

- A. Idle

- B. Connect
- C. OpenConfirm
- D. Established

Correct Answer: D

QUESTION 5

In a carrier-of-carrier VPN model, which type of network layer reachability information is used for the MPBGP signaling between CE and PE routers?

- A. flow
- B. labeled-unicast
- C. unicast
- D. inet-vpn

Correct Answer: D

In a Carrier-of-Carrier VPN environment, specify the inet-vpn address family and unicast traffic type to enable BGP to carry IPv4 network layer reachability information (NLRI) for VPN routes. References:

http://www.juniper.net/documentation/en_US/junos15.1/topics/example/mppls-vpn-option2configuration.html

[JN0-662 Practice Test](#)

[JN0-662 Study Guide](#)

[JN0-662 Braindumps](#)