

# JN0-681<sup>Q&As</sup>

New Data Center, Professional

## Pass Juniper JN0-681 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/jn0-681.html>

100% Passing Guarantee  
100% Money Back Assurance


Following Questions and Answers are all new published by Juniper  
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

Devices spine1 and spine2 have been configured as distributed Layer 3 gateways in the VXLAN topology, and devices leaf1 and leaf3 have been configured as Layer 2 gateways. Device host1 must be able to communicate with device host2.

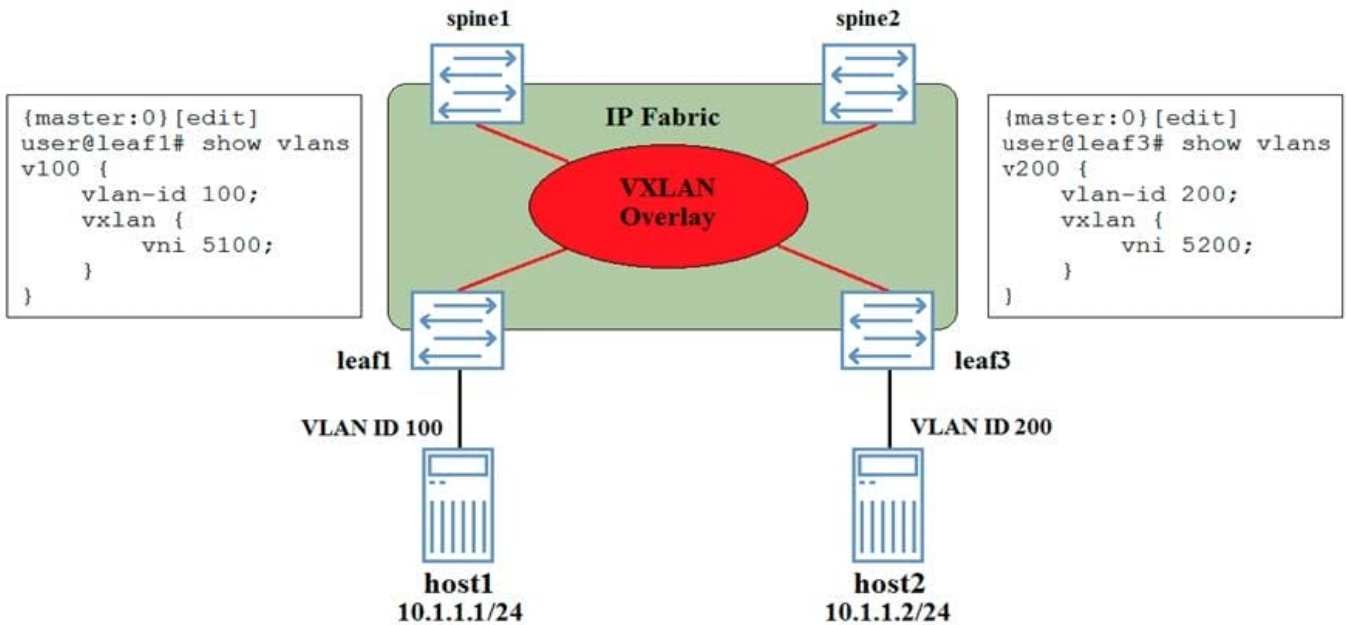

Referring to the exhibit, which two statements are true? (Choose two.)

- A. An IRB interface must be configured on devices leaf1 and leaf2.
- B. Traffic from host1 to host2 will transit the VXLAN tunnel from leaf1 to leaf3.
- C. Traffic from host1 to host2 will transit a VXLAN tunnel to spine1 or spine2, then a VXLAN tunnel from spine1 or spine2 to leaf3.
- D. An IRS interface must be configured on devices spine1 and spine2.

Correct Answer: CD

**QUESTION 2**

You are building a new IP fabric data center underlay network and want to ensure predictable load-balancing behavior for traffic traversing the fabric.

What are two approaches you should take to satisfy the requirement in this scenario? (Choose two.)

- A. Ensure that all uplinks are 40GbE.
- B. Ensure that every leaf node has a link to every other leaf node.
- C. Ensure that every leaf node has an uplink to every spine node.

D. Ensure that all spine devices are the same switch model.

Correct Answer: CD

---

### QUESTION 3

Which two statements define the use of route targets and route distinguishers in an EVPN? (Choose two.)

- A. Route targets ensure that routes from different clients remain unique within the data center domain.
- B. Route targets identify the VRF into which the route should be placed.
- C. Route distinguishers ensure that routes from different clients remain unique within the data center domain.
- D. Route distinguishers identify the VRF into which the route should be placed.

Correct Answer: BC

---

### QUESTION 4

You are configuring an EVPN overlay network. You want to ensure that leaf devices can respond to ARP requests from locally connected hosts, when the leaf device knows the MAC of the intended destination.

In this scenario, what should you configure on the leaf devices to accomplish this task?

- A. proxy ARP
- B. static ARP entries
- C. persistent MAC learning
- D. IGMP snooping

Correct Answer: A

---

### QUESTION 5

You are asked to configure VXLAN for your data center using multicast to exchange VTEP information.

In this scenario, which two configuration parameters must match on the VTEPs in the same VXLAN segment? (Choose two.)

- A. multicast group
- B. VLAN ID
- C. routing instance name
- D. VNI

Correct Answer: AD

---

[JN0-681 VCE Dumps](#)

[JN0-681 Study Guide](#)

[JN0-681 Braindumps](#)