

JN0-682^{Q&As}

Data Center Professional (JNCIP-DC)

Pass Juniper JN0-682 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/jn0-682.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

You have a two spine and four leaf CRB topology and you must ensure that the hosts connected to the leaf devices have reachability to all IRB interface addresses, including the local spine IRB addresses, and the virtual gateway address. Which two configuration parameters must be used to accomplish this task? (Choose two.)

- A. Configure a spine-to-spine BGP peering as part of the overlay.
- B. Configure virtual-gateway-accept-data under the IRB interface.
- C. Configure a spine-to-spine EVPN peering as part of the routing instance.
- D. Configure proxy-macip-advertisement under the IRB interface.

Correct Answer: BD

QUESTION 2

A customer wants to connect two data centers on different subnets using EVPN. What are two implications of using different IP subnets at each site? (Choose two.)

- A. Using different IP subnets at each site allows Layer 3 gateways to exchange only type-3 routes.
- B. MAC addresses will need to be advertised between the data centers.
- C. MAC addresses will not need to be advertised between the data centers.
- D. Using different IP subnets at each site allows Layer 3 gateways to exchange only type-5 routes.

Correct Answer: CD

QUESTION 3

You want to improve network convergence within a data center during link failures. In this scenario, which EVPN-VXLAN feature will accomplish this task?

- A. storm control
- B. Ethernet segment auto discovery
- C. MAC filtering
- D. MAC mass withdrawal

Correct Answer: D

QUESTION 4

You work in a data center where VMs and hosts are frequently moved. Your design needs to eliminate inefficient traffic flows.


In this scenario, which two solutions will satisfy this requirement? (Choose two.)

- A. VXLAN
- B. EVPN
- C. VMTO
- D. VPLS

Correct Answer: BC

QUESTION 5

A VXLAN has been created between devices leaf1 and leaf3.

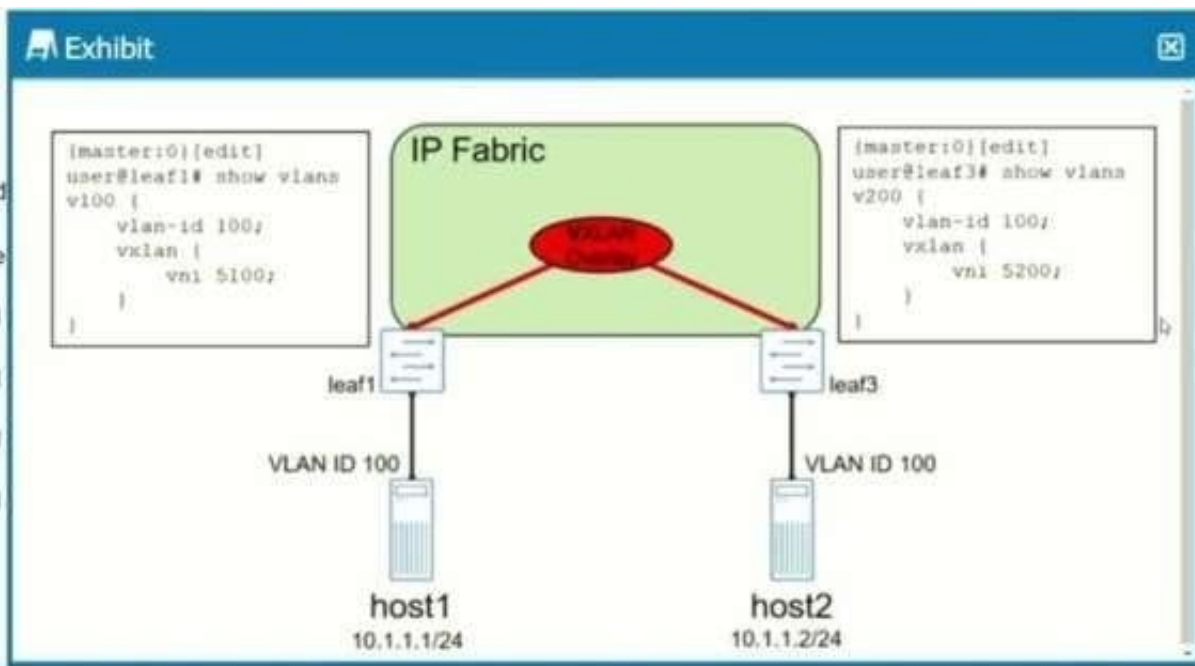

Referring to the exhibit, which statement is true?

- A. Traffic sent from host1 to host2 will be dropped on leaf3.
- B. Traffic sent from host1 to host2 will be tagged with VLAN ID 100 when exiting leaf3.
- C. Traffic sent from host1 to host2 will be tagged with VLAN ID 200 when exiting leaf3.
- D. Traffic sent from host1 to host2 will be dropped on leaf1.

Correct Answer: B

[Latest JN0-682 Dumps](#)

[JN0-682 Exam Questions](#)

[JN0-682 Braindumps](#)