Pass2Lead
https://Pass2Lead.com

NCS-CORE^{Q&As}

Nutanix Certified Services Core Infrastructure Professional

Pass Nutanix NCS-CORE Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass2lead.com/ncs-core.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Nutanix
Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update

⚙ **800,000+** Satisfied Customers

QUESTION 1

An administrator deploys Exchange on a Nutanix cluster. The administrator creates two containers with RF2 configuration:

One container for Exchange

One container for the other VMs

The Exchange VM isexperiencing I/O performance issues.

Which changes to Storage Optimization should be used on the Exchange container to enhance I/O performance?

A. No data reduction

B. Post process Deduplication only

C. Inline compression and EC-X

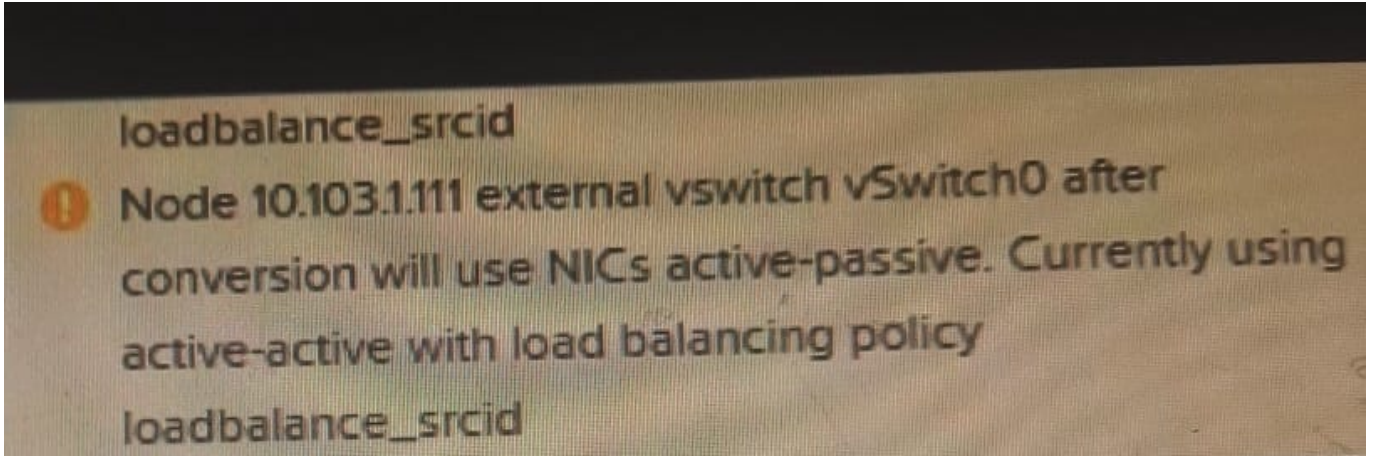D. Inline compression andDeduplication

Correct Answer: A

QUESTION 2

What reference materials should be provided to the customer during the Knowledge Transfer?

A. Questionnaire, technical slides and checklist, links to documentation and resources

B. As-Built Guide, technical slides and checklist, Network Diagram

C. As-Built Guide, Project Plan, links to documentation and resources

D. As-Built Guide, technical slides and checklist, links to documentation and resources

Correct Answer: D

QUESTION 3

Refer to the exhibit.

loadbalance_srcid

⚠ Node 10.103.1.111 external vswitch vSwitch0 after
conversion will use NICs active-passive. Currently using
active-active with load balancing policy
loadbalance_srcid

An administrator receive the warningmassages shown in the exhibit while validating cluster conversion from EXSi to AHV. What should the administrator do to address this warning in v Center Server?

A. Keep active adapters od different speeds as active standby

B. Remove adapters that are active but not homogeneous.

C. Keep homogeneous adapter as active and standby

D. Remove the standby adapters under Teaming and Failover.

Correct Answer: C

QUESTION 4

An administrator needs to forecast infrastructure requirements for a new program and its associated applications. Prior to the projected start of the new program, all existing applications will be decommissioned.

How should the administrator perform this task?

A. Check the Disregard Existing Workloads radio button in the Runway scenario.

B. Check the Disregard Existing Nodes radio button in the Runway scenario.

C. Add up the recovered workloads and manually remove from the Runway configuration.

D. Power down the workloads during a maintenance window and run the Capacity Runway.

Correct Answer: A

QUESTION 5

While trying to upgrade AOS in a cluster, a consultant receives a warning message that there are two powered-on VMs that need to be powered off for the upgrade to proceed.

What would cause this warning to be issued?

A. Upgrading a single-node cluster requires the VMs to be shut down.

B. Upgrading a two-node cluster requires the VMs to be shut down.

C. There are not enough resources left in the single-node cluster.

D. There are not enough resources left in the two-node cluster.

Correct Answer: A

[NCS-CORE PDF Dumps](#)   [NCS-CORE VCE Dumps](#)   [NCS-CORE Practice Test](#)