

# NS0-173<sup>Q&As</sup>

Cisco and NetApp FlexPod Design Specialist

## Pass NetApp NS0-173 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/ns0-173.html>

100% Passing Guarantee  
100% Money Back Assurance


Following Questions and Answers are all new published by NetApp  
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

Click the Exhibit button.

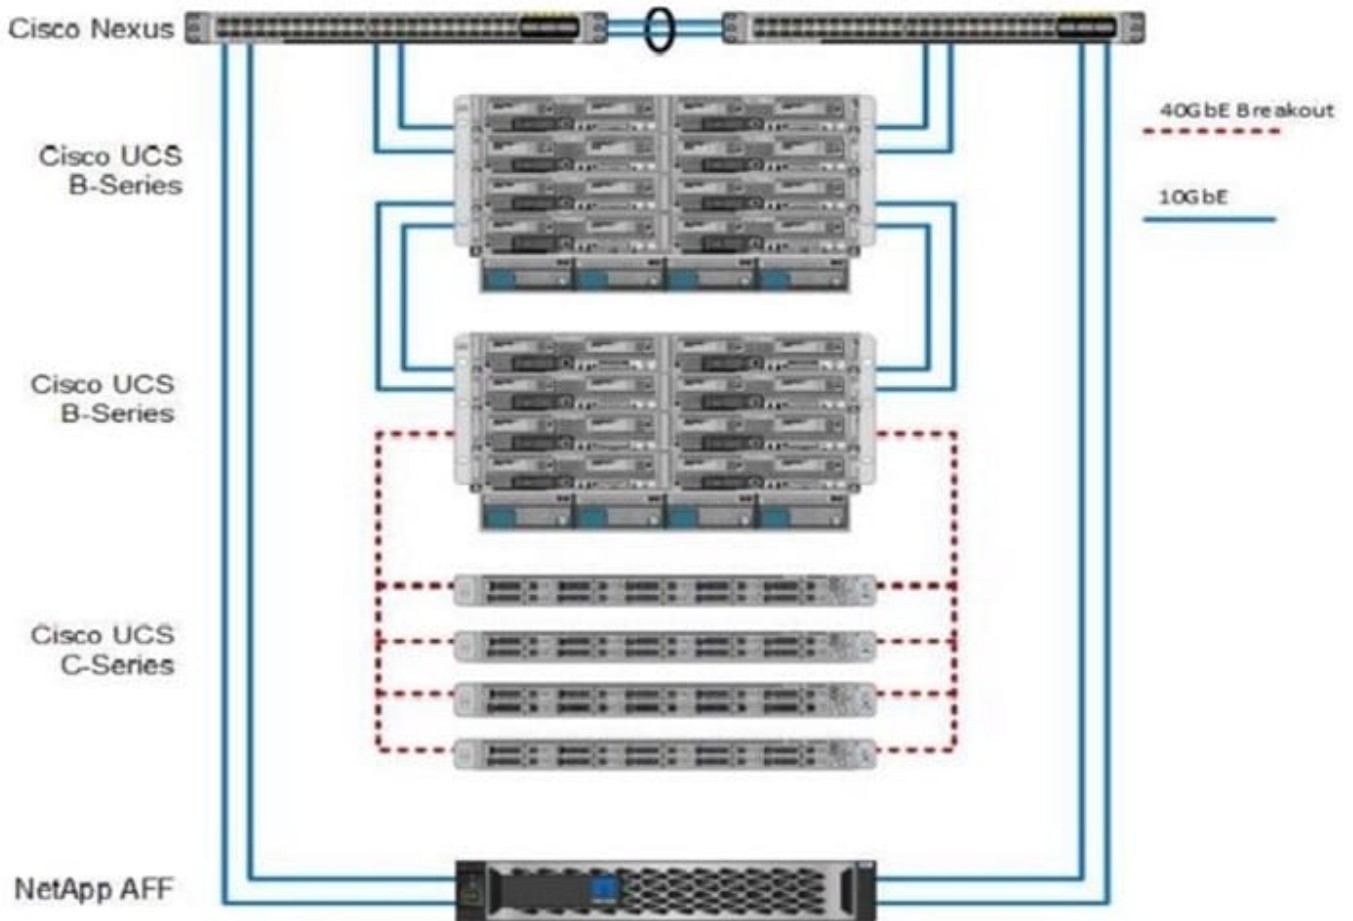

The total number of servers that a Cisco UCS Mini chassis supports is set to a maximum of how many hosts as shown in the exhibit?

- A. 22
- B. 12
- C. 20
- D. 8

Correct Answer: D

**QUESTION 2**

You are asked to design a FlexPod solution with a Cisco UCS B-Series chassis. There is no requirement for any Cisco UCS C-Series rack servers. You must ensure that there is a minimum of a 2500 VLAN or VSAN capacity per UCS

domain.

In this scenario, which Cisco Fabric Interconnects do you select?

- A. 6332
- B. 6248
- C. 6296
- D. 6324

Correct Answer: D

Reference: [https://www.cisco.com/c/en/us/td/docs/unified\\_computing/ucs/ucs-manager/CLI-User-Guides/Storage-Mgmt/3-2/b\\_CLI\\_UCSM\\_Storage\\_Management\\_Guide\\_3\\_2.pdf](https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/ucs-manager/CLI-User-Guides/Storage-Mgmt/3-2/b_CLI_UCSM_Storage_Management_Guide_3_2.pdf)

---

### QUESTION 3

A customer is planning to deploy a FlexPod solution for a large scale SAN requirement that uses the FC protocol. The customer plans to use Smart Zoning in the configurations to reduce the number of TCAM entries in the zoning process.

In this scenario, which design would enable the customer to use Smart Zoning?

- A. storage connected to Cisco Nexus 9000 Series switches
- B. storage connected to Cisco Nexus 5000 Series switches
- C. storage connected to Cisco MDS switches
- D. storage directly connected to Cisco UCS Fabric Interconnects

Correct Answer: C

Reference: [https://www.cisco.com/c/en/us/td/docs/unified\\_computing/ucs/UCS\\_CVDs/flexpod\\_datacenter\\_vmware\\_netappaffa\\_design.html#\\_Toc23952741](https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/UCS_CVDs/flexpod_datacenter_vmware_netappaffa_design.html#_Toc23952741)

---

### QUESTION 4

A customer has deployed a FlexPod Datacenter with Red Hat Enterprise Linux OpenStack Platform. The Cinder storage volumes that are attached to the Nova instances are not available.

Based on the terms of the cooperative support model, which three companies would the customer use to open a support case? (Choose three.)

- A. Cisco
- B. VMware
- C. Microsoft
- D. NetApp

E. Red Hat

Correct Answer: ADE

Reference: [https://www.cisco.com/c/en/us/td/docs/unified\\_computing/ucs/UCS\\_CVDs/flexpod\\_openstack\\_osp6\\_design.html](https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/UCS_CVDs/flexpod_openstack_osp6_design.html)

---

#### QUESTION 5

You are configuring a FlexPod system for NAS protocols. You want to ensure that there are multiple paths between the initiators and targets in the solution.

Which two steps will accomplish this task? (Choose two.)

- A. Allow the VLANs over the vPC peer link.
- B. Configure the VLANs in Cisco UCS Manager as Common/Global.
- C. Disable LACP.
- D. Configure the VSANs in the Cisco Nexus 5000 switches.

Correct Answer: BC

[NS0-173 PDF Dumps](#)

[NS0-173 VCE Dumps](#)

[NS0-173 Study Guide](#)