

NS0-175^{Q&As}

Cisco and NetApp FlexPod Design Specialist

Pass NetApp NS0-175 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/ns0-175.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

Click the Exhibit button. Exhibit 1.

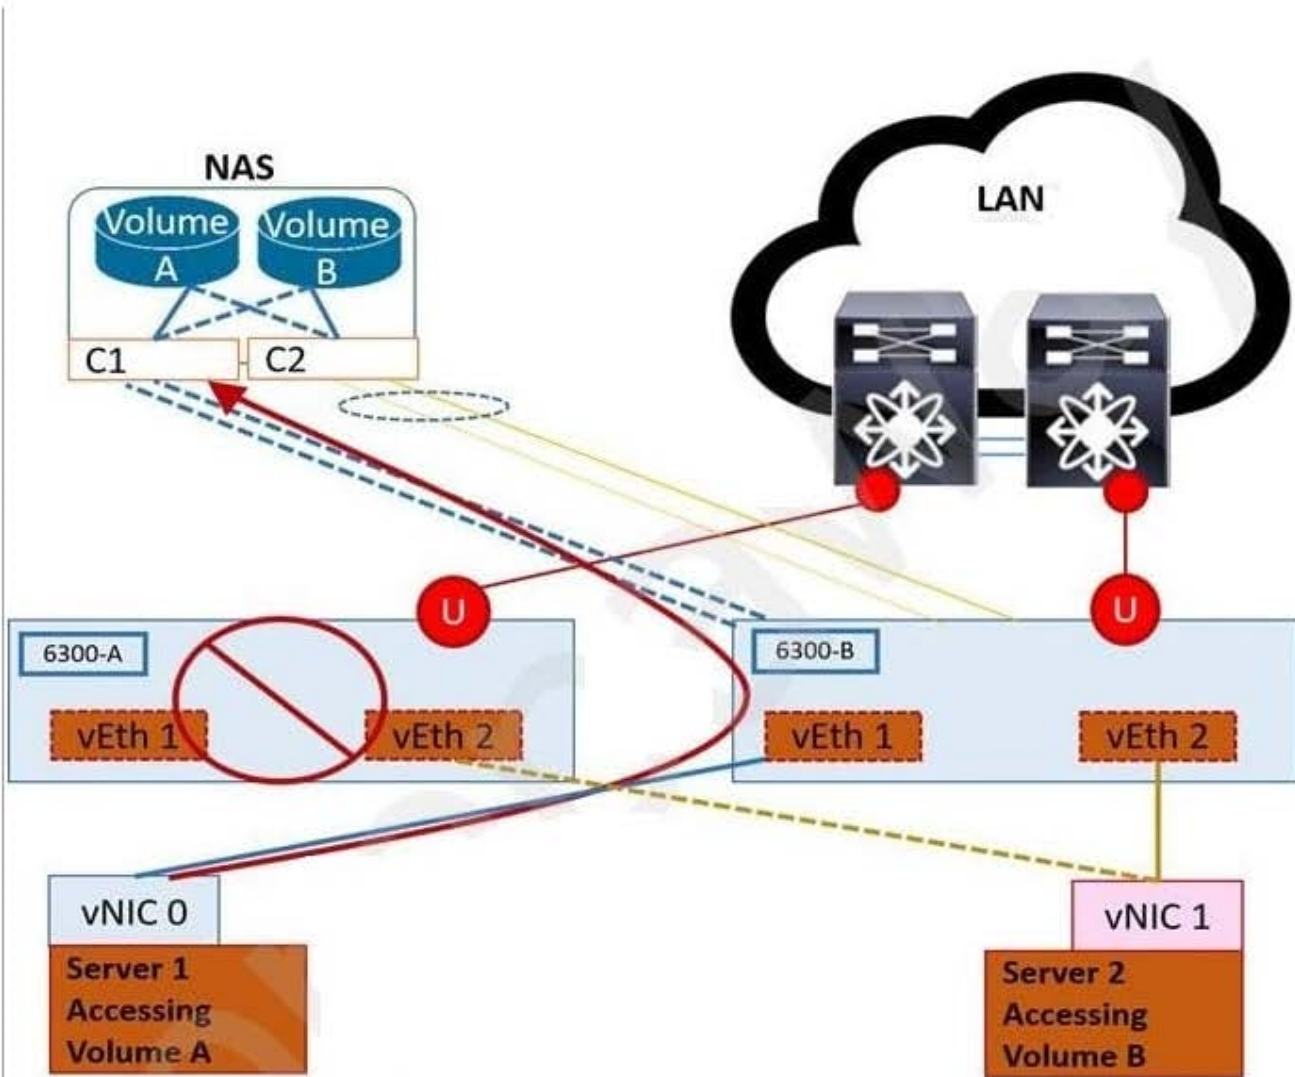


Figure 1


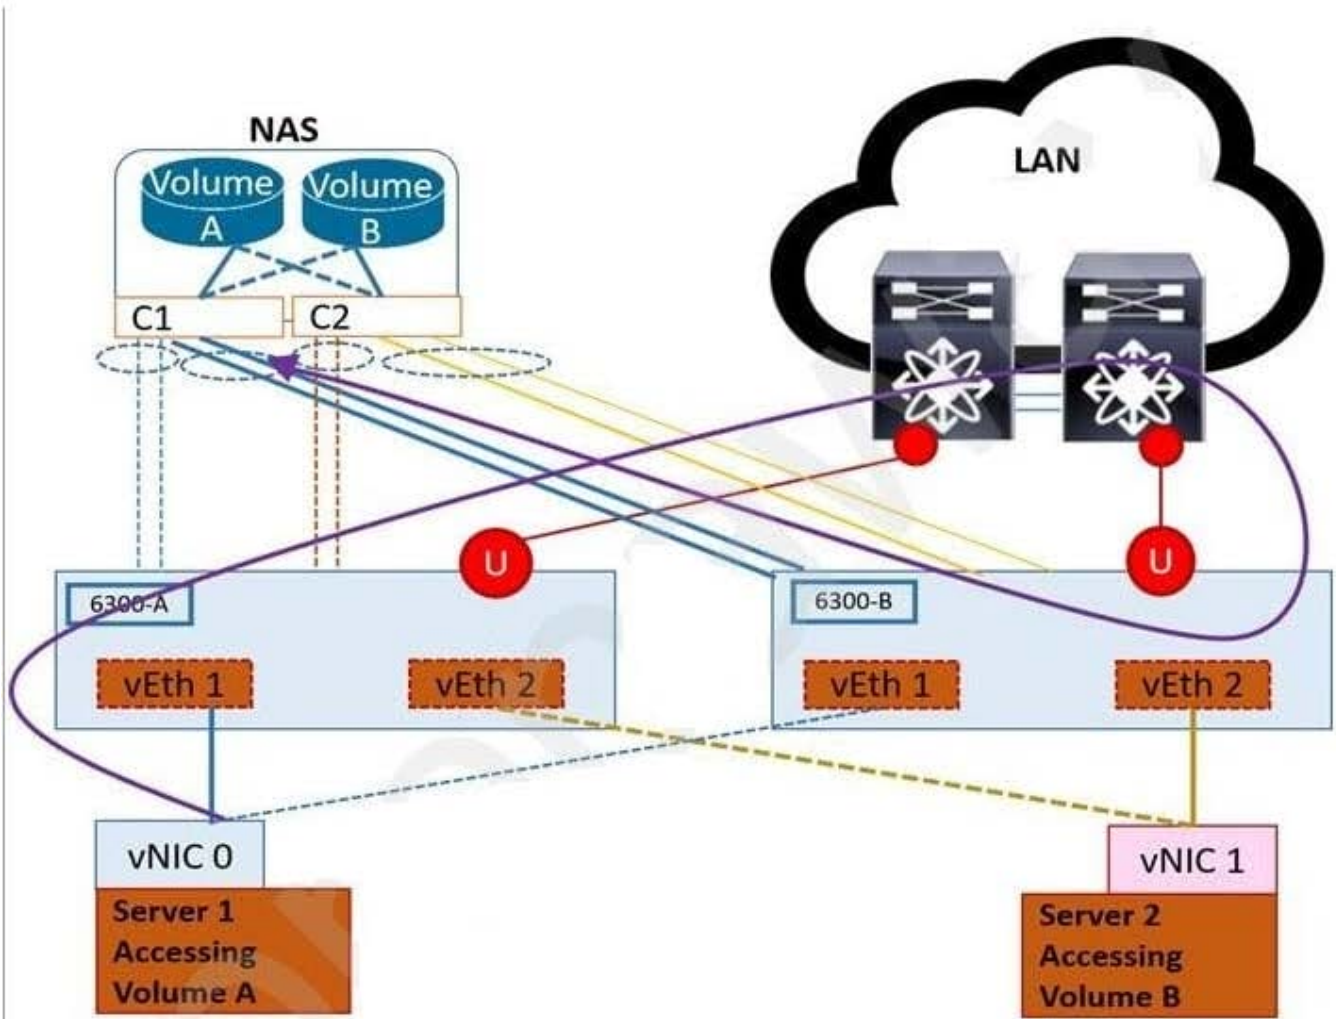


Figure 2

Exhibit 2.

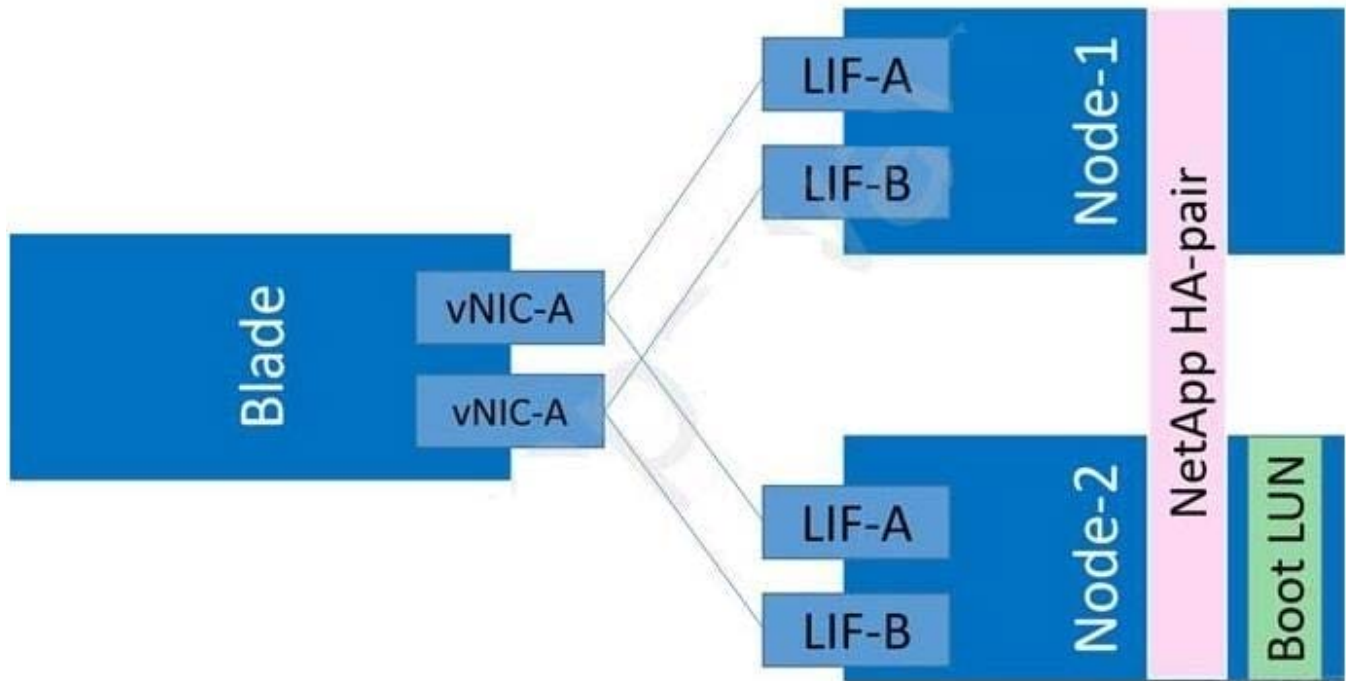

Referring to the exhibit, UCS Fabric Interconnect 6300-A fails as shown in Figure 1. Due to the storage LIF configuration, after UCS Fabric Interconnect 6300-A is restored, traffic flows as shown in Figure 2.

To enable this capability, on which two UCS port types should storage VLANs be accessible? (Choose two.)

- A. uplink ports
- B. appliance ports
- C. fabric ports
- D. switch ports

Correct Answer: AB

Reference: https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/ucs-manager/GUI-User-Guides/Getting-Started/3-2/b_UCSM_Getting_Started_Guide_3_2/b_UCSM_Getting_Started_Guide_3_2_chapter_010.pdf (8)

QUESTION 2

What are three requirements for all FlexPod Datacenter solutions? (Choose three.)

- A. two NetApp storage controllers in a high-availability (HA) pair configuration
- B. a separate 100 Mbps Ethernet/1 Gbps Ethernet out-of-band management network
- C. a pair of Fabric Extenders in a redundant configuration
- D. two Cisco UCS 6200, 6300, or 6400 Series Fabric Interconnects in a redundant configuration

E. redundant boot-from-SAN LUN paths

Correct Answer: CDE

QUESTION 3

A customer wants to deploy a FlexPod Datacenter solution that supports a secure multitenant design with VMware vSphere 6.x as the hypervisor. The customer wants to ensure that virtual machines are encrypted in transit and at rest and restricted to their specified tenant.

Which component should the customer use to implement this capability?

- A. Cisco TrustSec
- B. NetApp Storage Encryption
- C. NetApp Volume Encryption
- D. VMware vSphere virtual machine encryption

Correct Answer: B

QUESTION 4

Which two support account levels are minimally required when you deploy a FlexPod Datacenter solution? (Choose two.)

- A. NetApp SupportEdge Expert NBD
- B. Cisco SmartNet Total Care 24x7x4
- C. NetApp SupportEdge Advisor 24x7x4
- D. Cisco Solution Support 24x7x4

Correct Answer: CD

QUESTION 5

You are sizing a FlexPod Datacenter solution for multitenancy use.

What are two important platform scaling considerations in this scenario? (Choose two.)

- A. maximum NetApp ONTAP cluster limits
- B. maximum NetApp ONTAP storage VM limits

C. maximum Cisco vPC interfaces between Fabric Interconnects

D. maximum Cisco L1, L2 interfaces between Fabric Interconnects

Correct Answer: AD

[Latest NS0-175 Dumps](#)

[NS0-175 VCE Dumps](#)

[NS0-175 Practice Test](#)