

NS0-183^{Q&As}

NetApp Certified Storage Installation Engineer, ONTAP

Pass NetApp NS0-183 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/ns0-183.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by NetApp
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

Click the Exhibit button.

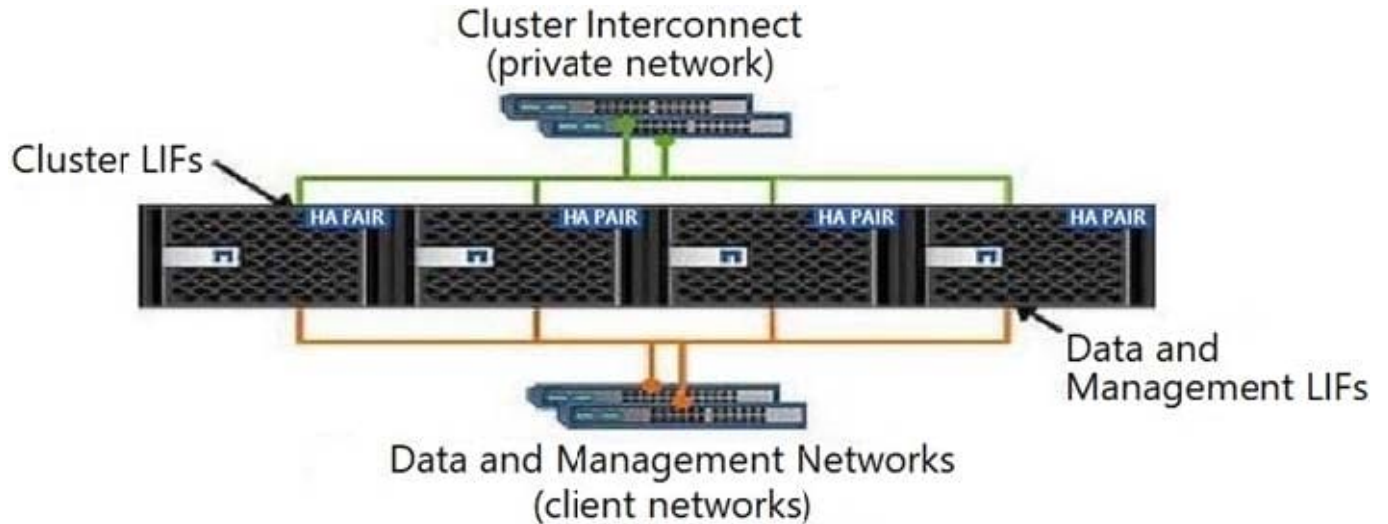

As shown in the exhibit, you have an 8-node ONTAP 9.7 cluster. You are asked to set up a SnapMirror volume relationship between node-1 and node-8 in the same cluster.

In this scenario, which two network components are used by the SnapMirror volume? (Choose two.)

- A. private network
- B. cluster LIFs
- C. client network
- D. management LIFs

Correct Answer: AB

QUESTION 2


You want to verify that connections are cables correctly and that shelf IDs are unique within an HA pair. Which tool would be used to accomplish these tasks?

- A. System Diagnostics
- B. Cloud Insights
- C. Active IQ Config Advisor
- D. Active IQ Unified Manager

Correct Answer: A

QUESTION 3

Click the Exhibit button.

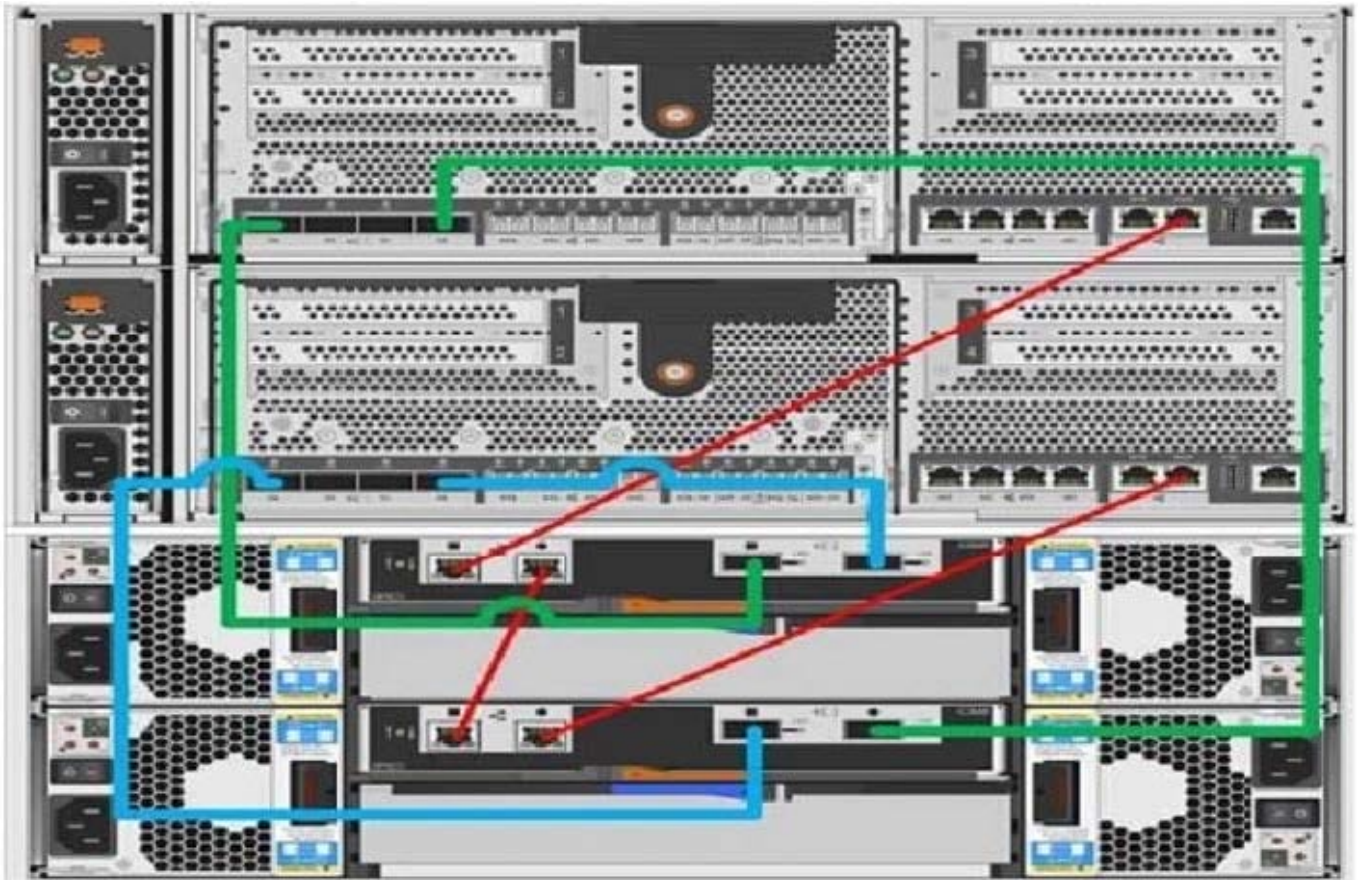

You are adding new DS224C shelves in a new stack to your cluster with FAS8060 controllers running ONTAP 9.7.

Referring to the exhibit, which two actions should be performed to the cluster before installing the new shelves? (Choose two.)

- A. Move the SAS cables to a new stack.
- B. Enable in-band ACP.
- C. Remove the Ethernet cables.
- D. Disable out-of-band ACP.

Correct Answer: AD

QUESTION 4

While testing a recently installed FAS8700 cluster, a node fails. You now need to replace the impaired node.

In this scenario, which two statements are true? (Choose two.)

- A. You must move the boot device from the impaired node to the replacement node.

- B. The boot device must remain intact and must not be removed from the impaired node.
- C. You can change any drives or disk shelves as part of this replacement procedure.
- D. A controller model of the same type must be used to replace the impaired node.

Correct Answer: AD

Reference: https://library.netapp.com/ecm/ecm_download_file/ECMP1147156 (2)

QUESTION 5

After a system panic, the NetApp Support team advises you to run the sldiag command.

Which two actions must be performed before you use this command? (Choose two.)

- A. At the LOADER prompt, type boot_maintenance.
- B. At the storage system prompt, type halt.
- C. At the LOADER prompt, type boot_diags.
- D. At the storage system prompt, type boot_maintenance.

Correct Answer: BC

Reference: <https://docs.netapp.com/platstor/index.jsp?topic=%2Fcom.netapp.doc.hw-plat-diag%2FGUIDB944DDDB-FA1D-4306-8157-2DF02613CA39.html>

[Latest NS0-183 Dumps](#)

[NS0-183 Practice Test](#)

[NS0-183 Exam Questions](#)