

# NS0-505<sup>Q&As</sup>

NetApp Certified Implementation Engineer – SAN ESeries

## Pass NetApp NS0-505 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/ns0-505.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp  
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

What would be the minimum configuration required to support a drawer-protected 20-drive DDP? (Choose the best answer.)


- A. An E2624 with four DE5600 Expansion Chassis, containing a total of 6, 1.6TB SSD and 96, 3T NL-SAS drives.
- B. An E5460 with one DE6600 Expansion Chassis, containing a total of 120, 3TB NL-SAS drives.
- C. An E2712 with one DE6600 Expansion Chassis, containing a total of 72, 3TB NL-SAS drives.
- D. An E5424 with one DE5600 Expansion Chassis, containing a total of 48, 900GB SAS drives.

Correct Answer: B

---

**QUESTION 2**

Review the diagram.

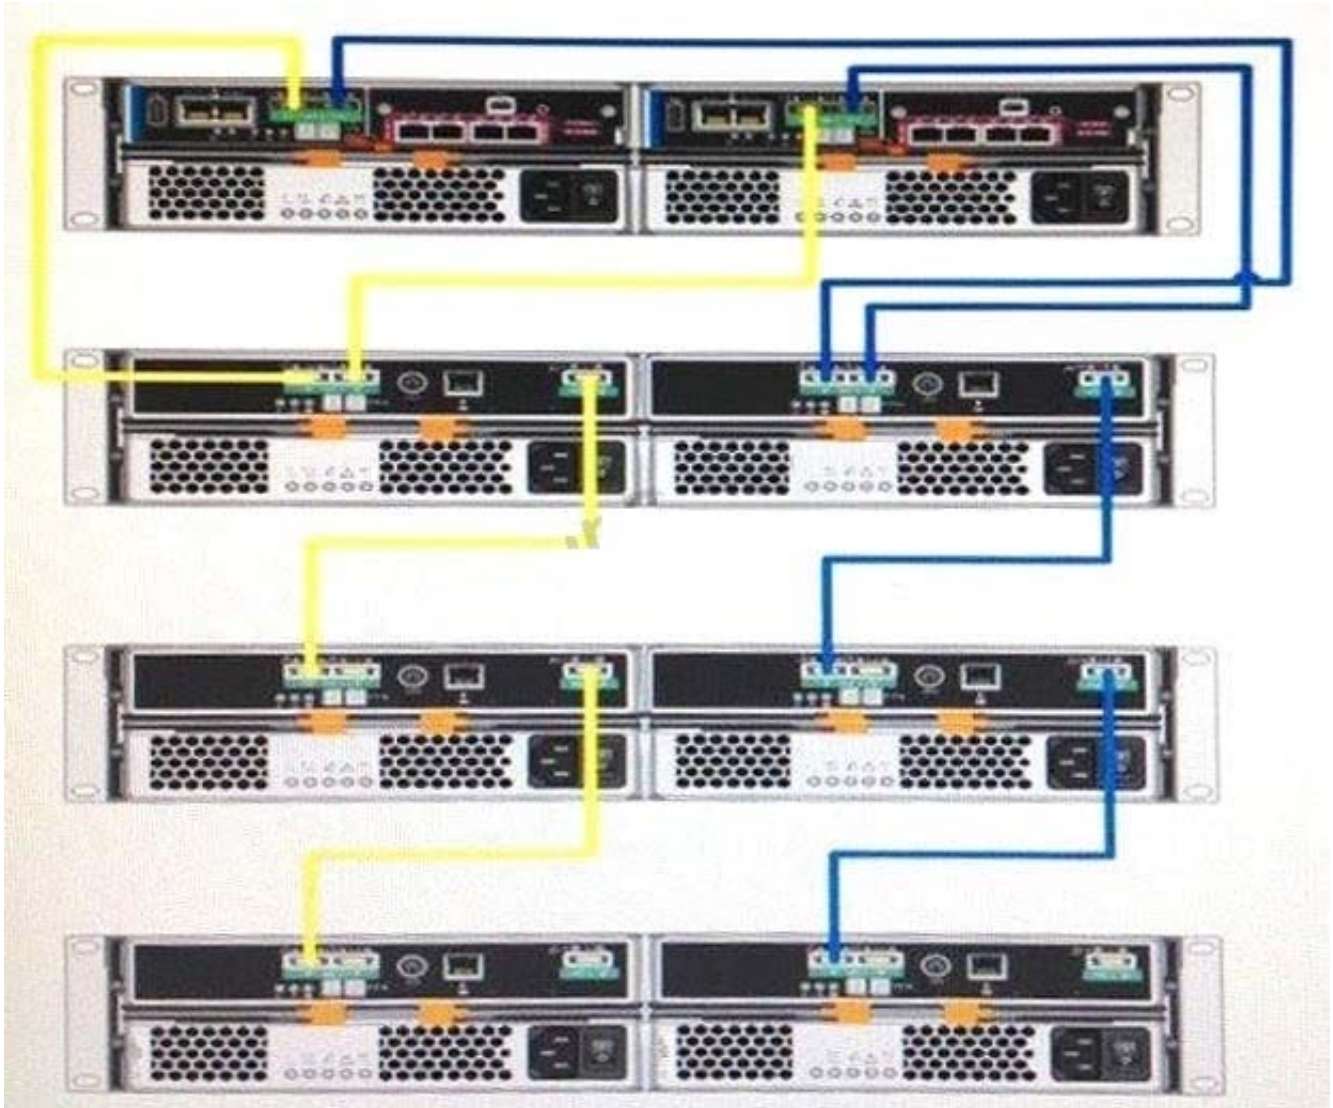

Is this cabling correct or incorrect, and why? (Choose the best answer.)

- A. The cabling is incorrect because the controllers are cabled from the host port.
- B. The cabling is incorrect because it uses the top-down bottom-up cabling method.
- C. The cabling is correct because it follows the recommended E-Series cabling method.
- D. The cabling is incorrect because they have been daisy-chained.

Correct Answer: D

### QUESTION 3

Controller firmware package files start with which character(s)? (Choose the best answer.)

- A. SMIA
- B. CFW

- C. DLP
- D. RC
- E. N

Correct Answer: A

---

**QUESTION 4**

What is the `base\` host connectivity provided by the E5400 Controller? (Choose the best answer.)

- A. None
- B. iSCSI
- C. SAS
- D. FC
- E. IB

Correct Answer: D

---

**QUESTION 5**

The ability of many E-Series controllers to hold an additional firmware image in reserve \_\_\_\_\_. (Choose the best answer.)

- A. is used to store a backup boot image
- B. allows controller firmware to be downloaded immediately and activated at a later time
- C. allows two firmware images to be used at the same time
- D. is used for Support use only

Correct Answer: C

[NS0-505 PDF Dumps](#)

[NS0-505 Exam Questions](#)

[NS0-505 Braindumps](#)