

# PSE-STRATADC<sup>Q&As</sup>

Palo Alto Networks System Engineer Professional - Strata Data Center

## Pass Palo Alto Networks PSE-STRATADC Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/pse-stratadc.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Palo Alto Networks Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

Which two methods provide a virtual IP address when implementing active/active HA? (Choose two)

- A. VRRP
- B. HSRP
- C. floating IP address
- D. ARP load sharing

Correct Answer: CD

---

**QUESTION 2**

A customer wants to completely segment their internal networks They have Cisco switches and extensively use 10Gbps interfaces. They are running VMware ESXi and are considering implementing NSX.

Which three Palo Alto Networks firewall models will support this deployment? (Choose three)

- A. PA-3050
- B. VM-100
- C. VM-300
- D. PA-3250
- E. PA-7050

Correct Answer: ADE

---

**QUESTION 3**

Which three software components have integration for deploying a VM-Series firewall in OpenStack? (Choose three)

- A. Mirantis OpenStack distribution
- B. Nuage VSP SDN controller
- C. VMWare NSX for OpenStack
- D. Cisco ACI
- E. Contrail SDN controller

Correct Answer: ACD

---

**QUESTION 4**

In PAN-OS, which three NSX features can be pushed from Panorama? (Choose three)


- A. user IP mappings
- B. steering rules
- C. multiple authorization codes
- D. security group assignments of VMs
- E. security groups

Correct Answer: ACE

---

**QUESTION 5**

In the following scenario, Route-based firewall redundancy is deployed in a Data Center, which statement is true?

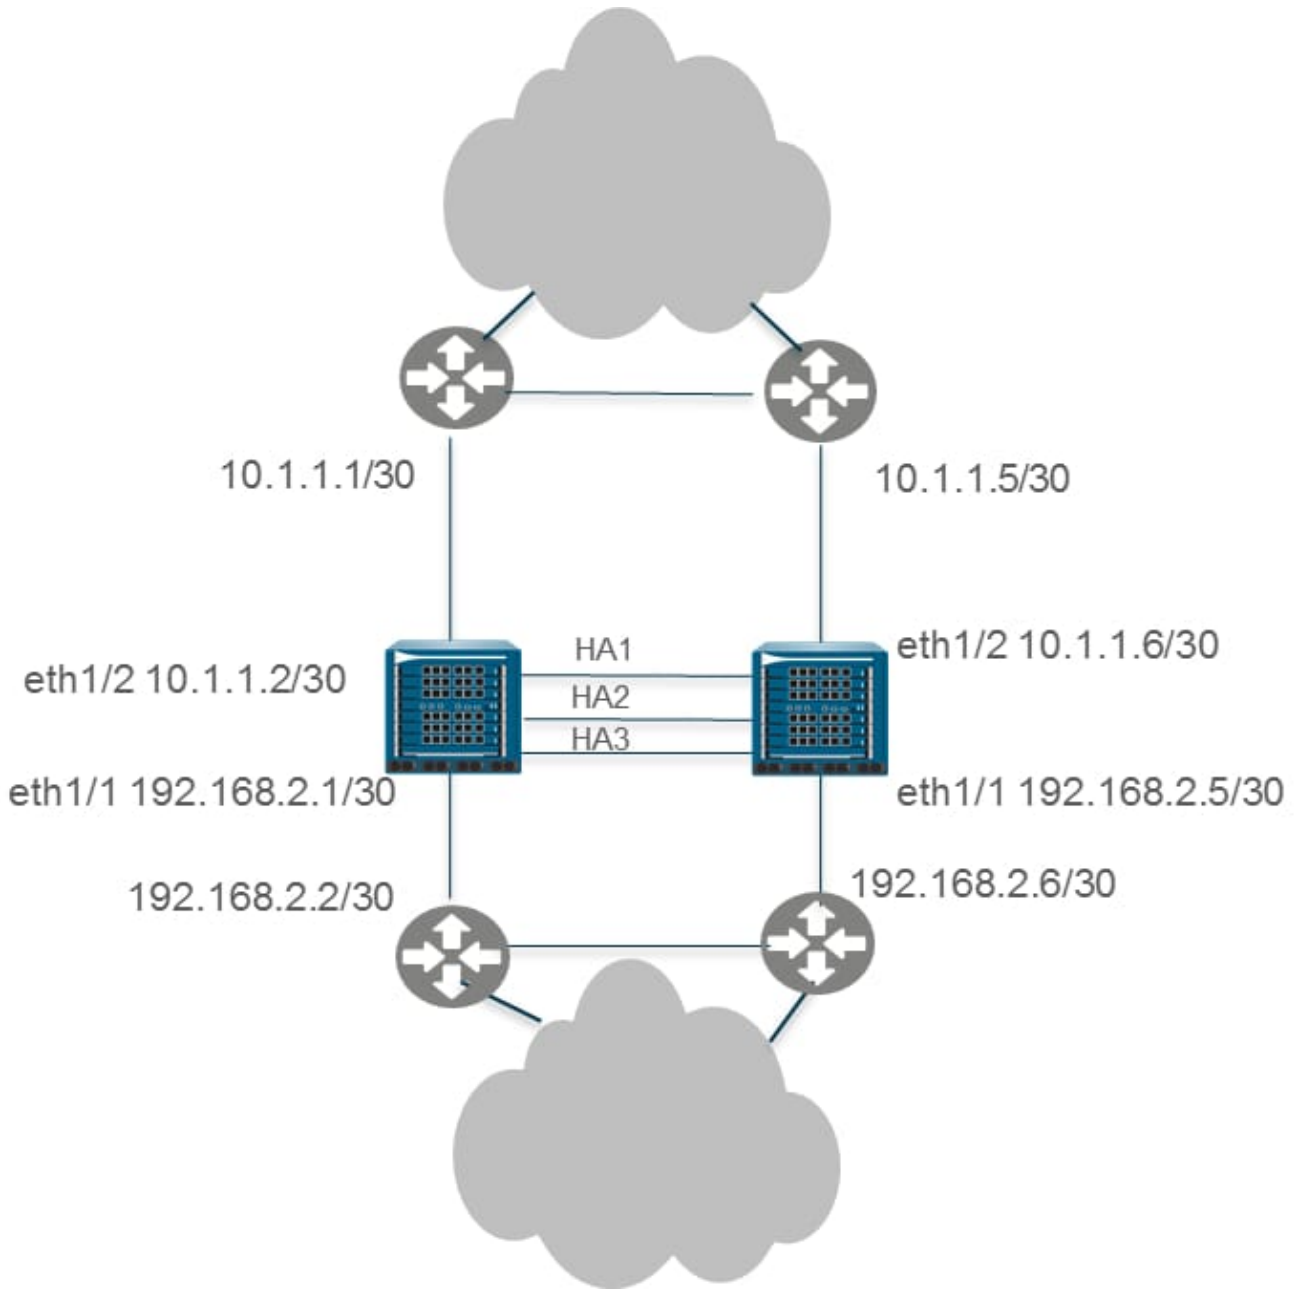

- A. IP addresses of Firewall interfaces will move between devices when a firewall fails.
- B. The 2 firewalls are in Active-Standby HA status.
- C. Firewalls use dynamic routing protocols to determine the best path.
- D. Floating IP addresses are necessary for HA configuration.

Correct Answer: C