

# 3V0-21.21<sup>Q&As</sup>

Advanced Design VMware vSphere 7.x

## Pass VMware 3V0-21.21 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/3v0-21-21.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by VMware  
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



### QUESTION 1

An architect is considering placement of virtual machines within an existing VMware software-defined data center (SDDC).

During the discovery phase, the following information is documented:

Cluster One Six ESXi hosts vSphere HA with host failures cluster tolerates = 1 Proactive HA is enabled and set to automated Fully Automated vSphere DRS Transparent Page Sharing (TPS) is enabled

Cluster Two Eight ESXi hosts vSphere HA with host failures cluster tolerates = 1 Proactive HA is disabled Partially Automated vSphere DRS Transparent Page Sharing (TPS) is disabled

Cluster Three Three ESXi hosts vSphere HA with admission control is disabled Proactive HA is not supported Transparent Page Sharing (TPS) is disabled

Virtual Machine Resource Profile 1 Memory sharing techniques should not be used Virtual machines should be automatically restarted in the event of host failure if resources are available Automated initial virtual machine placement

Virtual Machine Resource Profile 2 Memory sharing techniques can be used Virtual machines should be protected from any host hardware failures Automated initial virtual machine placement Which two recommendations should the architect make for placement of the virtual machines to meet resource profile requirements? (Choose two.)

- A. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster One.
- B. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster One.
- C. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Two.
- D. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster Two.
- E. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Three.

Correct Answer: BD

---

### QUESTION 2

The architect for a large enterprise is tasked with reviewing a proposed design created by a service partner.

Which design elements are expected to be detailed within the physical design section of the documentation?

- A. A design diagram illustrating the configuration and specific attributes, such as IP addresses
- B. A list of requirements, constraints, and risks
- C. A solution architecture diagram with the components and data flow
- D. An entity relationship diagram describing upstream and downstream dependencies for specific service components

Correct Answer: B

---

### QUESTION 3

The Chief Information Security Officer (CISO) for an organization is concerned about the security posture of the operating system images that are used for the provisioning of their Software-as-a-Service (SaaS) applications. The organization is in a growth period. The organization is opening a new data center to

launch its next phase of new SaaS-based solutions.

The DevOps team currently creates encrypted virtual machine (VM) templates that are used for various operating systems and adds these to the vSphere inventory. The DevOps team already uses a published content library and has been granted a role with the ability to add and delete library items.

The following requirements have been noted:

Impacts to the DevOps team's operational processes must be kept to a minimum.

The DevOps team must be able to regularly check out a copy of the image for updates and check in a new version of the image.

Images must be synchronized from the primary data center to the new data center.

Which three recommendations should the architect make to design a content library solution that will meet these requirements? (Choose three.)

- A. Clone virtual machines as VM templates to the published content library
- B. Create a subscribed library from the published library and synchronize Open Virtualization Format (OVF) templates on-demand
- C. Create a subscription and publish VM templates to a subscribed content library
- D. Create a subscribed library from the published library and synchronize Open Virtualization Format (OVF) templates automatically
- E. Clone virtual machines as Open Virtualization Format (OVF) templates to the published content library
- F. Update the role for the DevOps team with new privileges

Correct Answer: BEF

---

### QUESTION 4

An architect is designing the expansion of an existing vSphere 7 environment. The customer is requesting a design for a new cluster to support the anticipated future business growth. The requirements specified for the existing environment design must be considered when designing the new cluster.

The existing design has the following requirements:

- REQ01 The environment has an availability target of 99.5% for all infrastructure.
- REQ02 The recovery time objective (RTO) for Tier 1 virtual machines is one hour.
- REQ03 Windows and Linux virtual machines must reside on separate clusters.
- REQ04 Access to the management cluster within the environment must be controlled.

Which of the listed requirements would be classified as a functional requirement?

- A. The environment has an availability target of 99.5% for all infrastructure
- B. The recovery time objective (RTO) for Tier 1 virtual machines is one hour
- C. Access to the management cluster within the environment must be controlled
- D. Windows and Linux virtual machines must reside on separate clusters

Correct Answer: A

---

#### QUESTION 5

A customer defines a requirement to minimize the vMotion migration time during a maintenance period. The servers being used are equipped with eight 1 GbE network adapters.

Per the defined logical network configuration, there are two network adapters each used for:

Management traffic vMotion traffic iSCSI traffic Virtual machine traffic

Which design decision should the architect make to meet the customer requirement?

- A. Use Network I/O Control to define a reservation for vMotion traffic.
- B. Implement Multi-NIC vMotion by adding additional vMotion VMkernels.
- C. Configure a dedicated TCP/IP stack for vMotion traffic.
- D. Combine vMotion and Management traffic to make use of four adapters.

Correct Answer: A

---

#### QUESTION 6

Which of the listed requirements would be classified as a recoverability non-functional requirement?

- A. The platform must be integrated with existing change control policies.
- B. The platform must be able to support a maximum tolerable downtime (MTD) of 30 minutes.

- C. Maintenance windows must be scheduled to take place monthly during an established overnight period.
- D. The platform must be available 24 hours a day, 7 days a week with the exception of scheduled downtime.

Correct Answer: A

---

### QUESTION 7

The Chief Operating Officer (COO) at an organization raises concerns that their virtual infrastructure environment is vulnerable. Recently, a security-related issue with a virtual machine caused all management services to become unavailable. No budget is available in the short term for additional platform investment. An architect is asked to review the current environment and make recommendations to mitigate concerns.

A virtualization administrator has provided the following details: There is a single four node cluster of ESXi servers. There are two, Layer 2, physical network switches connecting resources. The data center network is presented as a single /16 subnet.

Given the information provided, which functional requirement should the architect include in the design to mitigate the COO's concerns?

- A. The virtual infrastructure environment must connect application virtual machines and management services to new physical network switches.
- B. The virtual infrastructure environment must connect application virtual machines and management services to separate distributed virtual switches (DVS).
- C. The virtual infrastructure environment must connect application virtual machines and management services to separate VLANs.
- D. The virtual infrastructure environment must connect management services to a vSphere standard switch (VSS).

Correct Answer: D

---

### QUESTION 8

Which requirement would be classified as a functional requirement within the design documentation?

- A. The system must perform virtual machine backups through an API.
- B. Virtual machines must be patched within one month of the patch release date.
- C. Virtual machines must be restarted within 30 minutes of a host failure.
- D. The system must be able to scale to support 500 concurrent virtual machines.

Correct Answer: C

---

**QUESTION 9**

An architect makes the design decision to install ESXi on embedded and resilient 8 GB SD cards. What is the impact of this design decision?

- A. Host profiles must be used for this kind of installation
- B. Scratch partition would need to be created on the external storage
- C. The size of the SD cards is too small and the installation will fail
- D. The vSphere Auto Deploy feature must be enabled on vCenter Server

Correct Answer: A

---

**QUESTION 10**

An architect is planning the physical server configuration for a vSAN-based infrastructure.

Which operations mode should a RAID controller support to minimize potential server downtime during physical disk failures?

- A. RAID controller with Passthru mode
- B. RAID controller with RAID 5 mode
- C. RAID controller with RAID 10 mode
- D. RAID controller with RAID 6 mode

Correct Answer: D

Reference: <https://docs.vmware.com/en/VMware-vSphere/7.0/vsan-702-planning-deployment-guide.pdf>

(25)

---

**QUESTION 11**

During a requirements gathering workshop to design a physical to virtual migration, the customer provides the following information:

There is no physical firewall in the data center with no anticipated plans for a future network refresh.

Leveraging the virtual infrastructure to mitigate the lack of network security must be addressed in the design.

All physical servers to be migrated exist on the same VLAN.

Which recommendation should the architect make to address the customer requirement with regard to virtual networking?

- A. Split the virtual machines into several VLANs Use tag actions
- B. Create port groups with different names and same VLAN IDs Enable traffic shaping for ingress and egress traffic
- C. Enable traffic filtering and marking Use allow or drop actions
- D. Disable traffic filtering and marking Use tag actions

Correct Answer: A

---

#### QUESTION 12

An architect is designing a new VMware software-defined data center (SDDC) that will consist of 100 branch sites connected to a single VMware vCenter Server within the primary data center. To allow for the use of existing automation scripts, there is a requirement to replicate the names of the virtual distributed port groups across all sites. The procurement team purchases licensing and there is no further budget allocated.

Which design decision should the architect make to meet this requirement?

- A. A new vCenter Server will be deployed for each branch site
- B. A new host and cluster folder will be created for each branch site
- C. The automation script will be updated to reflect unique naming for each site
- D. A new virtual data center will be created for each branch site

Correct Answer: B

---

#### QUESTION 13

An architect will be taking over control of a former Linux server fleet and repurposing the hardware into a new vSphere cluster. The current environment is already connected to the network but the hosts do not have any local disks. Since the fleet hardware is uniform, the architect can use a single ESXi image. All hosts within the cluster have the same CPU and memory capacity.

Which ESXi deployment method should the architect use?

- A. Stateless cached vSphere Auto Deploy
- B. Stateless vSphere Auto Deploy
- C. Manual install of each ESXi host with an image from USB
- D. Stateful vSphere Auto Deploy

Correct Answer: A


---

#### QUESTION 14

Refer to the exhibit.

---

During a requirements gathering workshop, a customer shares the following diagram regarding their availability service-level agreements (SLAs):

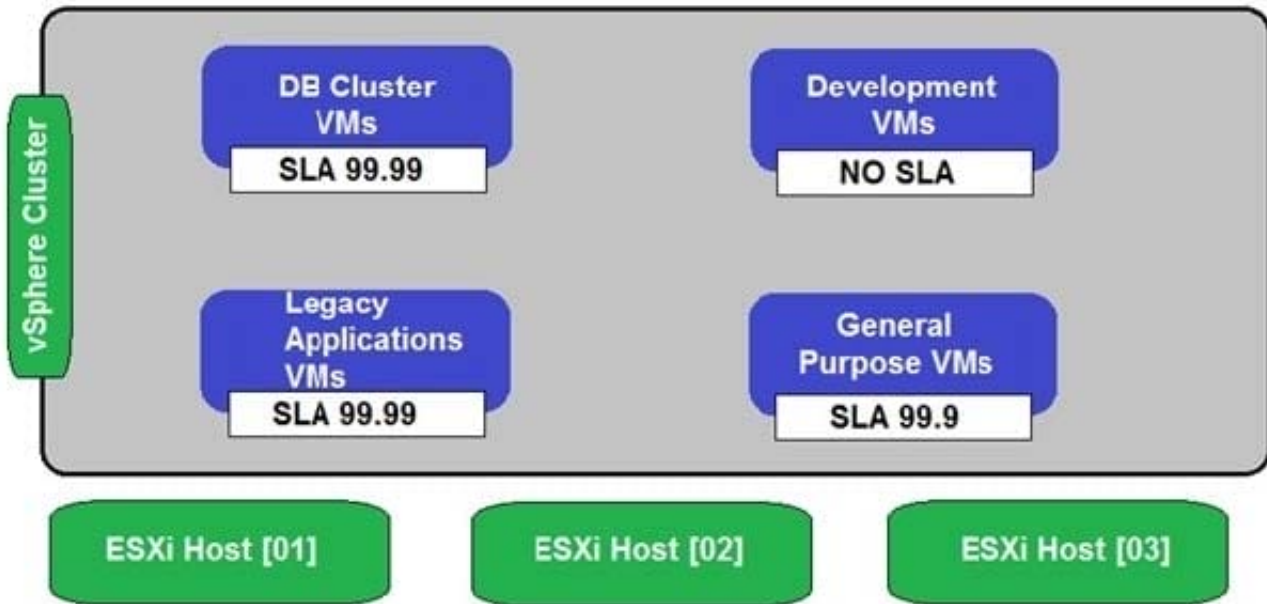

The customer states that there is no application level availability for legacy applications.

Which recommendation could the architect make to meet the customer's high availability requirements for the legacy applications virtual machines?

- A. Enable vSphere HA and add a VM Override with VM Restart Priority set to Disabled
- B. Enable Fault Tolerance
- C. Achieve application availability with snapshots
- D. Enable vSphere HA and add a VM Override with VM Restart Priority set to Lowest

Correct Answer: A

### QUESTION 15

A customer is deploying a new cluster and wants to be able to patch and update two hosts in parallel. The cluster must be able to maintain N+1 resiliency across the remaining hosts while patching activities are performed. The current expected utilization of the platform requires a minimum of two hosts to support all of the virtual machines.

What is the minimum number of hosts the customer will require in the cluster in order to meet the required resiliency level?

- A. Five
- B. Six
- C. Four



D. Seven

Correct Answer: C

[3V0-21.21 PDF Dumps](#)

[3V0-21.21 VCE Dumps](#)

[3V0-21.21 Study Guide](#)