

E20-377^{Q&As}

RecoverPoint/SE Specialist Exam for Implementation Engineers

Pass EMC E20-377 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/e20-377.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by EMC
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

Under which conditions will Enginuity remove the Consistency Exempt attribute from the RDF mirror?

- A. Creating RDF pairs
- B. Splitting RDF pairs
- C. Moving RDF pairs
- D. Suspending RDF pairs

Correct Answer: C

QUESTION 2

Besides enabling the SYMAPI_USE_GNS option on the host, to store SYMAPI device group and composite group definitions in a common repository, which conditions must be fulfilled to make the host capable of using this repository?

- A. Locally attached, and a running GNS daemon
- B. Remotely attached, and a running GNS daemon
- C. Locally or remotely attached, and a running GNS daemon
- D. All hosts that have a valid copy of the SYMAPI database file

Correct Answer: A

QUESTION 3

Multiple RDF groups from Different Symmetric arrays have been grouped together to enable Multi Sessions consistency. How does Cycle Switching occur in this configuration?

- A. Cycle switches are controlled by the master Symmetrix.
- B. Cycle switches are controlled by RDF daemon
- C. Cycle switches always occur independently on each Symmetrix after 30 minutes
- D. Cycle switches always occur simultaneously on each Symmetrix arrays after 30 minutes

Correct Answer: B

QUESTION 4

What is the maximum number of Symmetrix V-Max array Initiator Groups that an initiator may be associated with?

- A. 1


- B. 4
- C. 8
- D. 16

Correct Answer: A

QUESTION 5

Refer to the exhibit.

Which delta set will be discarded as a result of a Multi session-Consistency (MSC) cleanup?

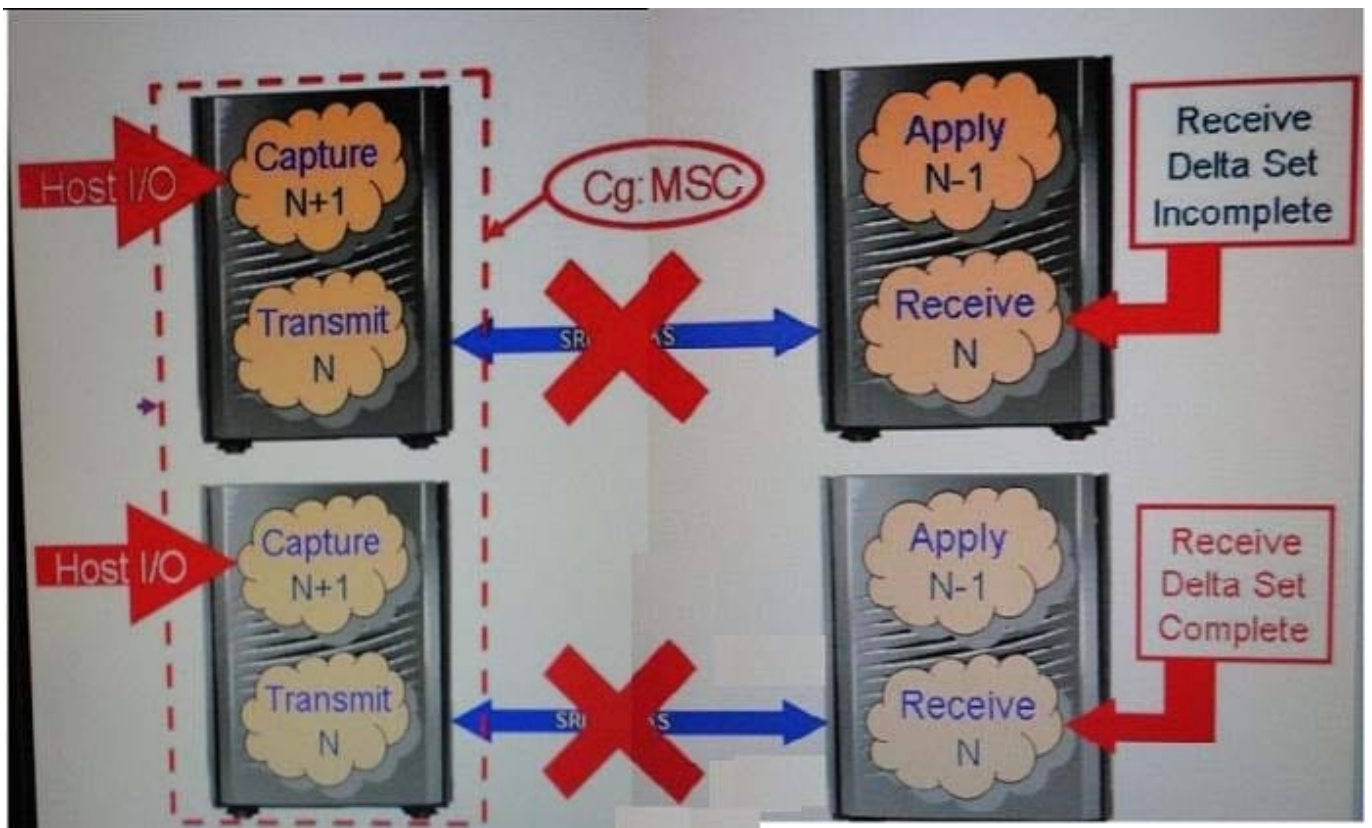

- A. Apply delta set in the top right Symmetrix
- B. Receive delta set in the bottom right Symmetrix
- C. Apply delta set in the bottom-right Symmetrix
- D. Receive delta set in the top right Symmetrix

Correct Answer: D

QUESTION 6

What is the maximum number of initiators allowed in a Symmetrix V-Max array initiator Group?

- A. 8
- B. 32
- C. 16
- D. 48

Correct Answer: B

QUESTION 7

What is suppressed when scripting SYMCU commands using the -nop option?

- A. Confirmation questions to the command screen
- B. Informational messages to the command screen
- C. Error messages to the command screen
- D. All outputs to the command screen

Correct Answer: A

QUESTION 8

Which replication operations are supported by Solution Enabler SYMCLI, but NOT by Symmetrix management console?

- A. SRDF/ Star
- B. Open replicator
- C. SRDF/A and SRDF/S
- D. TimeFinder/Clone and TimeFinder/Snap

Correct Answer: A

QUESTION 9

Which feature allows the contents of a BCV to remain unchanged during and after operation? Even while the BCV and the standard is synchronized?

- A. Protected restore
- B. Full establish
- C. Symmir restore

D. Incremental restore

Correct Answer: C

QUESTION 10

Which replication operations are supported by the Symmetrix Management Console?

- A. Open Replicator, SRDF/A, and SRDF/S
- B. SRDF/Star, TimeFinder/Clone, and TimeFinder/Snap
- C. Open Replicator, SRDF/Star, and TimeFinder/Snap
- D. SRDF/A, SRDF/S, and SRDF/Star

Correct Answer: A

QUESTION 11

What status of Time Finder/Snap virtual devices will be used as a control device in an Open replicator implementation devices?

- A. Read Write
- B. Write Dashboard
- C. Held
- D. Not Ready

Correct Answer: B

QUESTION 12

One of the requirements during an Open Replicator implementation is to provide all available resources to Open Replicator. How should the Pace and Ceiling values be configured?

- A. Pace and Ceiling should be left at the default.
- B. Pace should be set to 0 and Ceiling set to 100.
- C. Pace should be set to 9 and Ceiling set to 0.
- D. Pace should be set to 9 and Ceiling set to NONE.

Correct Answer: B

QUESTION 13

A customer would like to implement Virtual Provisioning in the Symmetrix V-Max array. What is the requirement for the data devices in the thin pool?

- A. Should be the same protection type
- B. Should belong to a single engine
- C. Should belong to different disk groups
- D. Should be RAID 5

Correct Answer: A

QUESTION 14

Where is the volume Logix Database maintained starting with DMX-3?

- A. VCM gatekeeper
- B. Symmetrix logical Volume
- C. Symmetrix File System
- D. VCM database.

Correct Answer: C

QUESTION 15

After acquiring a company 300 hundred miles from their current office the customer has asked EMC to help to design a single hop application recovery plan after careful analysis of the work load and available bandwidth, SRDF/AR was selected as the solution.

If the SRDF/AR cycle time is set to 90 minutes, what is the maximum potential data loss?

- A. 2 hours of data
- B. 1.5 hours of data
- C. 4.5 hours of data
- D. 3 hours of data

Correct Answer: A

[E20-377 PDF Dumps](#)

[E20-377 VCE Dumps](#)

[E20-377 Practice Test](#)