

# NS0-183<sup>Q&As</sup>

NetApp Certified Storage Installation Engineer, ONTAP

## Pass NetApp NS0-183 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/ns0-183.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp  
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

When you install a new ONTAP 9.7 4-node cluster, which network type is required?

- A. data network
- B. peering network
- C. cluster interconnect
- D. intercluster network

Correct Answer: C

Reference: <https://docs.netapp.com/ontap-9/topic/com.netapp.doc.dot-cm-nmg/Network%20and%20LIF%20management.pdf>

---

**QUESTION 2**

You are installing a 4-node AFF A400 cluster and are asked to create a custom security message before and after user login.

Which two security features are used to perform this task? (Choose two.)

- A. EMS
- B. banner
- C. motd
- D. AutoSupport

Correct Answer: BD

---

**QUESTION 3**

What should you do to change the data protocol of a LIF?

- A. Delete and re-recreate the LIF.
- B. Add the new data protocol to the LIF.
- C. Put the LIF in another broadcast domain.
- D. Shut down the assigned port.

Correct Answer: A

Reference: <https://docs.netapp.com/ontap-9/index.jsp?topic=%2Fcom.netapp.doc.dot-cm-nmg%2FGUID26EEBB35-4CA6-4814-B819-32DAB46F50E5.html>

---

**QUESTION 4**

You are asked to add a new HA pair to an existing 2-node switchless AFF A220 cluster. You must first convert to a 2-node switched cluster using Broadcom BES-53248 cluster switches.

Which two conditions must be fulfilled before you start the migration? (Choose two.)

- A. All cluster LIFs must be in the up state and on their home ports.
- B. The "Enabled Switchless Cluster" option must be manually set to "false".
- C. All cluster LIFs must have an MTU size of 1500.
- D. The 2-node switchless configuration must be properly set up and functioning.

Correct Answer: AD

Reference: <https://docs.netapp.com/platstor/index.jsp?topic=%2Fcom.netapp.doc.hw-sw-ix8-migrate-2n%2FGUID-81FD5EDF-8902-40EA-9050-69358426CB6F.html>

---

**QUESTION 5**

You are installing a new AFF A400 cluster and need to access the cluster management LIF from a remote subnet with the fully qualified domain name (FQDN) a400.lab.netapp.com.

In this scenario, which two network components must be configured to log in to ONTAP System Manager from the remote subnet? (Choose two.)

- A. route
- B. NTP
- C. DNS
- D. VLAN

Correct Answer: AC

---

**QUESTION 6**

You have just finished installing and configuring an ONTAP cluster for a customer.

In this scenario, which product collects information and produces site documentation?


- A. NetAppDocs
- B. Inventory Collect Tool
- C. SnapGathers
- D. Active IQ OneCollect

Correct Answer: A

Reference: [http://197.253.9.244/ontap%209-5/Cluster%20Admin/2\\_Student%20Guide/STRSW-ILTONTAPADM\\_StudentGuide.pdf](http://197.253.9.244/ontap%209-5/Cluster%20Admin/2_Student%20Guide/STRSW-ILTONTAPADM_StudentGuide.pdf)

**QUESTION 7**

Click the Exhibit button.

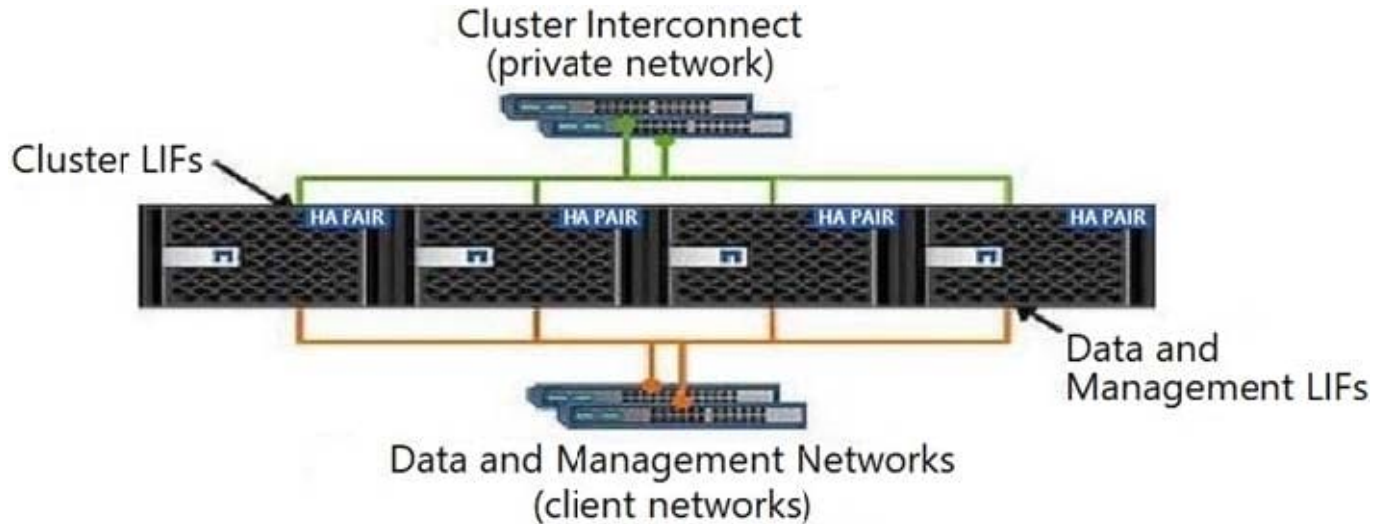

As shown in the exhibit, you have an 8-node ONTAP 9.7 cluster. You are asked to set up a SnapMirror volume relationship between node-1 and node-8 in the same cluster.

In this scenario, which two network components are used by the SnapMirror volume? (Choose two.)

- A. private network
- B. cluster LIFs
- C. client network
- D. management LIFs

Correct Answer: AB

**QUESTION 8**

Click the Exhibit button.



You plan to install a new ONTAP cluster at a customer site by using the new ONTAP System Manager 9.7 GUI.

Referring to the exhibit, what must you do before you provision initial storage?

- A. Configure cluster LIFs.
- B. Configure protocols.
- C. Configure a remote tier.
- D. Configure aggregates.

Correct Answer: D

---

#### QUESTION 9

You are setting up a new AFF A400 that will serve iSCSI LUNs. You will have four iSCSI SVMs that each need to connect to an Internet Storage Name Service (iSNS) for discovery and management purposes.

In this scenario, which network interface is needed for each SVM to register with the name service?

- A. SVM data LIF
- B. SVM management LIF
- C. node management LIF
- D. intercluster LIF

Correct Answer: D

---

#### QUESTION 10

Which two SVMs are automatically created during the cluster setup? (Choose two.)

- A. admin SVM
- B. system SVM
- C. node SVM
- D. data SVM

Correct Answer: AB

[Latest NS0-183 Dumps](#)

[NS0-183 PDF Dumps](#)

[NS0-183 VCE Dumps](#)