

MCD-LEVEL1-DELTA^{Q&As}

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA

Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/mcd-level1-delta.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Mulesoft
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

Refer to the exhibit.



```
<flow name="validatePayload" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path="/" />
  <set-payload value="Before" doc:name="Before" />
  <validation:is-null doc:name="payload" value="#[payload]" message="Validation Error"/>
  <set-payload value="After" doc:name="After" />
</flow>
```

What is the response to a web client request to http://localhost:8081?



- A. After
- B. before
- C. Validation Error
- D. null

Correct Answer: A

QUESTION 2

Refer to the exhibits. The Set Payload transformer in the addItem child flow uses DataWeave to create an order object.

What is the correct DataWeave code for the Set Payload transformer in the createOrder flow to use the addItem child flow to add a router call with the price of 100 to the order?

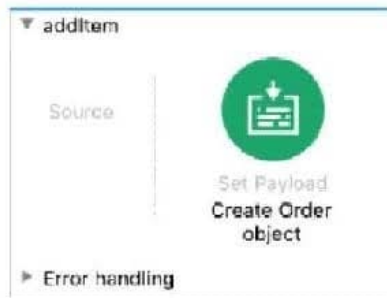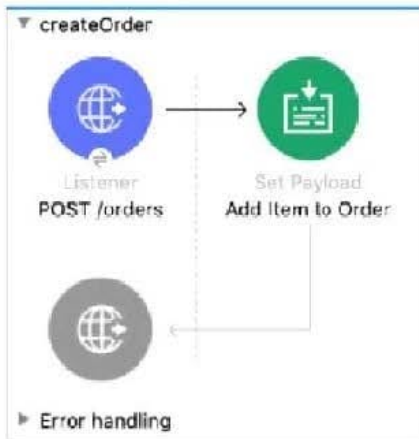

```
1 @%dw 2.0
2 output application/json
3 ---
4 order: {
5   item: {
6     itemName: payload.item,
7     itemType: payload.itemType,
8     price: payload.price
9   }
10 }
```

- A. lookup("addItem", { price: "100", item: "router", itemType: "cable" })
- B. addItem({ payload: { price: "100", item: "router", itemType: "cable" } })
- C. lookup("addItem", { payload: { price: "100", item: "router", itemType: "cable" } })
- D. addItem({ price: "100", item: "router", itemType: "cable" })

Correct Answer: C

QUESTION 3

A RAML specification is defined to manage customers with a unique identifier for each customer record. What URI does MuleSoft recommend to uniquely access the customer identified with the unique ID 1234?

- A. /customers?custid=trueandcustid=1234
- B. /customers/1234
- C. /customers/custid=1234
- D. /customers?operation=getandcustid=1234

Correct Answer: B

QUESTION 4

What module and operation will throw an error if a Mule event's payload is not a number?

- A. Validation module's Is number operation
- B. Filter module's Is number operation
- C. None of these
- D. Validation module's Is not a number operation

Correct Answer: A

QUESTION 5

A Scatter-Gather processes a number of separate HTTP requests. Each request returns a Mule event with a JSON payload.

What is the final output of the Scatter-Gather?

- A. An Object containing all Mule event Objects.
- B. An Array containing all Mule event Objects.
- C. None of these.
- D. The last Mule event object.

Correct Answer: A

[Latest MCD-LEVEL1-DELTA Dumps](#)

[MCD-LEVEL1-DELTA PDF Dumps](#)

[MCD-LEVEL1-DELTA Braindumps](#)