

MCD-LEVEL1-DELTA^{Q&As}

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA

Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/mcd-level1-delta.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by Mulesoft
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

Refer to the exhibits.

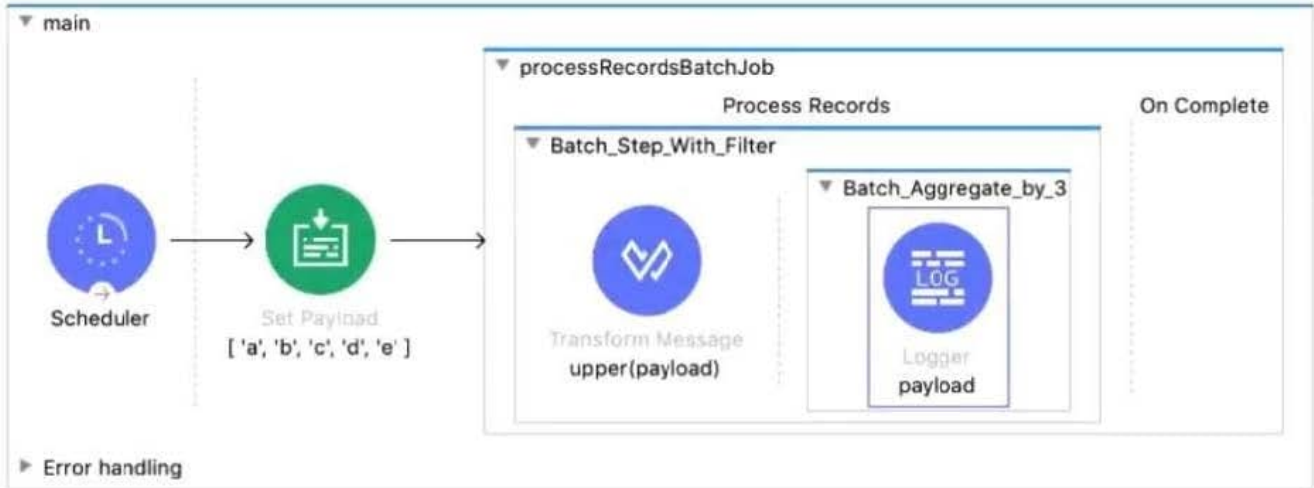

```
<Flow name="main" >
  <scheduler doc:name="Scheduler" > <scheduling-strategy >
    <fixed-frequency frequency="10000"/> </scheduling-strategy> </scheduler>
    <set-payload value="#[[ 'a', 'b', 'c', 'd', 'e' ]]" doc:name="[ 'a', 'b', 'c', 'd', 'e' ]" />
    <batch:job jobName="processRecordsBatchJob" >
      <batch:process-records >
        <batch:step name="Batch_Step_With_Filter"
          acceptExpression='#[not (payload contains "b") ]'>
          <ee:transform doc:name="upper(payload)" > <ee:message >
            <ee:set-payload ><![CDATA[%dw 2.0
              output application/json
              ---
              upper(payload)]]></ee:set-payload>
          </ee:message></ee:transform>
          <batch:aggregator doc:name="Batch_Aggregate_by_3" size="3">
            <logger level="INFO" doc:name="payload"
              message="#[output application/json --- payload]"/>
          </batch:aggregator>
        </batch:step>
      </batch:process-records>
    </batch:job>
  </Flow>
```

The input array of strings is processed by the batch job that processes, filters, and aggregates the values. What is the last message logged by the Logger component after the batch job completes processing?


- A. [["A", "C", "D"], ["E"]]
- B. ["\\E\\\\"]
- C. ["\\D", "E"]
- D. ["A", "C", "D", "E"]

Correct Answer: A

QUESTION 2

Refer to the exhibits.

A web client sends a GET request to the HTTP Listener. What response message is returned to the web client?

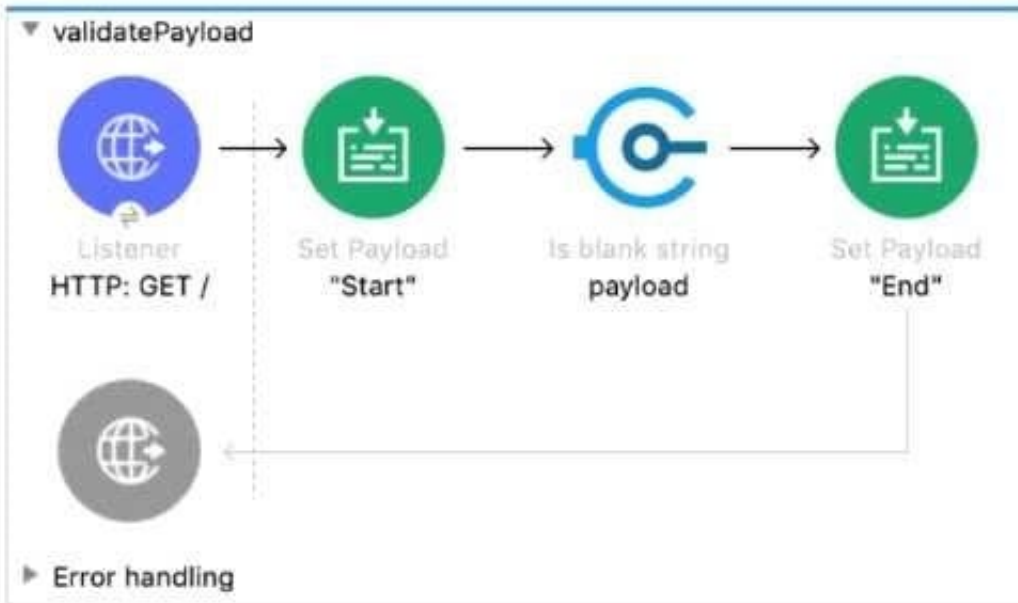

```
<flow name="validatePayload" >  
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_listener_config" path="/" />  
  <set-payload value="Start" doc:name="Start" />  
  <validation:is-blank-string doc:name="payload" value="#[payload]" />  
  <set-payload value="End" doc:name="End" />  
</flow>
```

- A. ""
- B. "End"
- C. "Start"
- D. "String is not blank"

Correct Answer: D

QUESTION 3

Refer to the exhibit.

```
#!/RAML 1.0
title: ACME Airlines
version: 1.0
```

```
/flights:
  get:
    responses:
      200:
      404:
  /airline:
    get:
      queryParameters:
        code: string
      responses:
        200:
        404:
```

```
/accounts:
  get:
    responses:
      200:
      404:
  post:
    responses:
      201:
```

How many private flows does APIKIT generate from the RAML specification?

- A. 1
- B. 2
- C. 3
- D. 4

Correct Answer: D

QUESTION 4

Refer to the exhibit. The main flow contains an HTTP Request in the middle of the flow. The HTTP Listeners and HTTP request use default configurations. What values are accessible to the Logger at the end of the flow after a web client submit request to `http://local:801/order?color=red?`



- A. payload
- B. payload quantity var
- C. payload color query param
- D. payload quantity var color query param

Correct Answer: B

QUESTION 5

Refer to the exhibit.



What is a valid expression for the Choice router's when expression to route events to the documenticShipping flow?

- A. 0#[payload = \'US\']
- B. #[payload == \'US\']
- C. #[if(payload = \'US\')]
- D. #[if(payload == "US")]

Correct Answer: B

[Latest MCD-LEVEL1-DELTA Dumps](#)

[MCD-LEVEL1-DELTA PDF Dumps](#)

[MCD-LEVEL1-DELTA Braindumps](#)