

MCD-LEVEL1-DELTA^{Q&As}

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA

Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/mcd-level1-delta.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by Mulesoft
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

Refer to the exhibit.

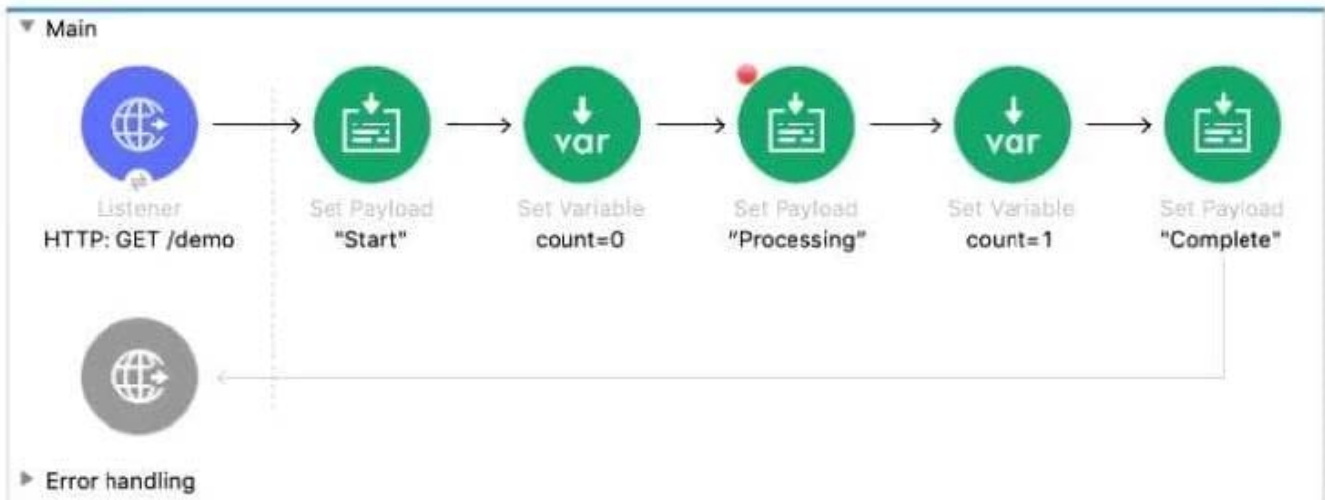

The Mule application is debugged in Any point Studio and stops at the breakpoint. What is the value of the payload displayed in the debugger at this breakpoint?

- A. 0
- B. "Processing"
- C. "Start"
- D. Complete"

Correct Answer: C

QUESTION 2

Refer to the exhibit.




What is the correct syntax to add an employee ID as a URI parameter in an HTTP Listener path?

- A. (employeeID)
- B. \${employeeID}

- C. {employeeID}
 - D. # [employeeID]
- Correct Answer: C

QUESTION 3

Refer to the exhibits.

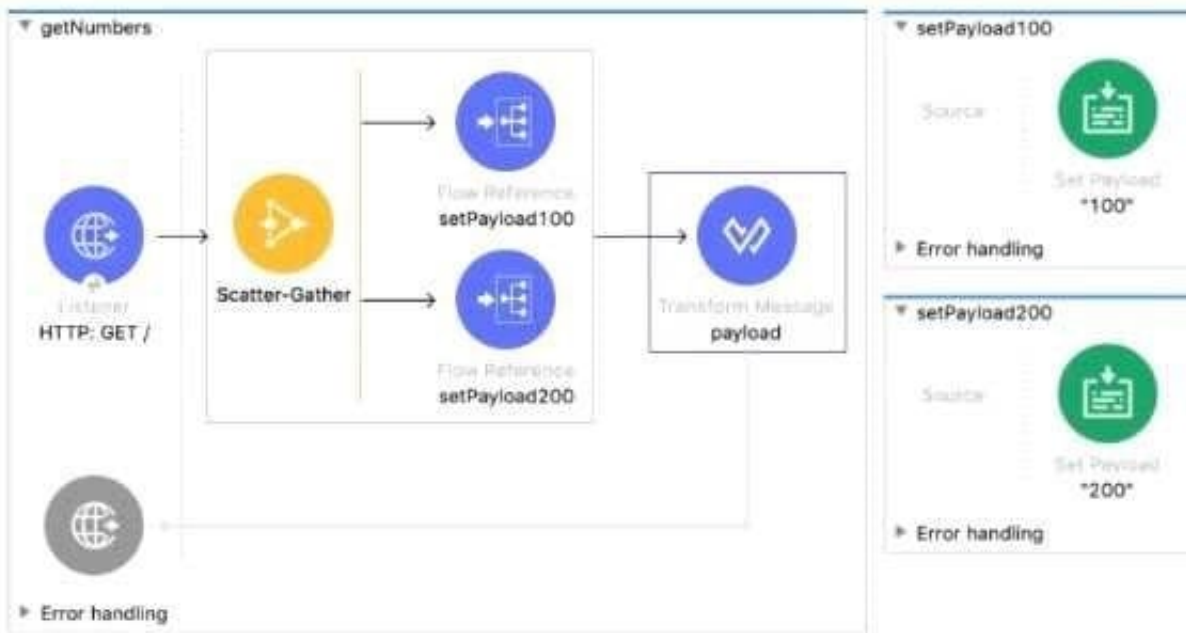

```
<flow name="getNumbers" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path="/" />
  <scatter-gather doc:name="Scatter-Gather" >
    <route >
      <flow-ref doc:name='setPayload100' name='setPayload100' />
    </route>
    <route >
      <flow-ref doc:name="setPayload200" name="setPayload200" />
    </route>
  </scatter-gather>
  <ee:transform doc:name="payload">
    <ee:message >
      <ee:set-payload ><![CDATA[%dw 2.0
output application/json
---
payload]]></ee:set-payload>
    </ee:message>
  </ee:transform>
</flow>
<flow name="setPayload100" ><set-payload value='#[ "100" ]' doc:name=' "100" ' /></flow>
<flow name="setPayload200" ><set-payload value='#[ "200" ]' doc:name=' "200" ' /></flow>
```

The input array of strings is processed by the batch job that processes, filters, and aggregates the values. What is the

last message logged by the Logger component after the batch job completes processing?

- A.

```
[
  {
    "attributes": ...,
    "payload": "100"
  },
  {
    "attributes": ...,
    "payload": "200"
  }
]
```
- B.

```
{
  "0": "100",
  "1": "200"
}
```
- C.

```
["100", "200"]
```
- D.

```
{
  "0": {
    "attributes": ...,
    "payload": "100"
  },
  "1": {
    "attributes": ...,
    "payload": "200"
  }
}
```

A. Option A

B. Option B

C. Option C

D. Option D


Correct Answer: C

QUESTION 4

Refer to the exhibits.

```
#%RAML 1.0
title: ACME Order API
version: 1.0
```

```
/order:
  post:
    body:
      application/xml:
        example: |
          <order oid="1001">
            <customerName>Annie Point
            </customerName>
            <itemName>Electric Standing Desk
            </itemName>
            <cost>300.00</cost>
          </order>
```

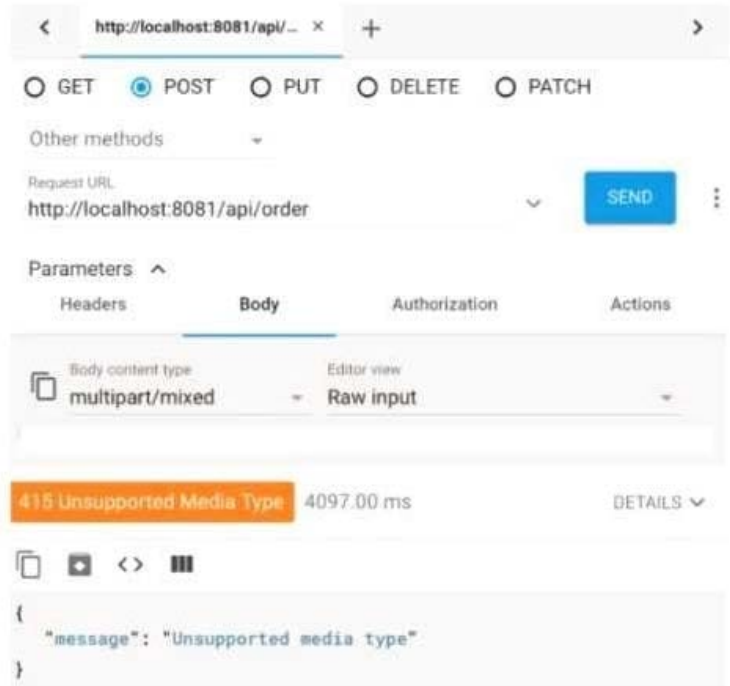

The web client sends a POST request to the ACME Order API with an XML payload. An error is returned. What should be changed in the request so that a success response code is returned to the web client?

- A. Set a request header with the name Content-Type to a value of applicatron/octet-stream
- B. Set a request header with the name Content-Type to a value of application/xml
- C. Set a response header with the name Content-Type to a value of applkation/xml
- D. Set a response header with the name Content-Type to a value of application/octet-stream

Correct Answer: B

QUESTION 5

A Scatter-Gather processes a number of separate HTTP requests. Each request returns a Mule event with a JSON payload.

What is the final output of the Scatter-Gather?

- A. An Object containing all Mule event Objects.
- B. An Array containing all Mule event Objects.
- C. None of these.

D. The last Mule event object.

Correct Answer: A

[MCD-LEVEL1-DELTA PDF Dumps](#)

[MCD-LEVEL1-DELTA Study Guide](#)

[MCD-LEVEL1-DELTA Exam Questions](#)