![Pass2Lead](https://Pass2Lead.com)
# MS-600<sup>Q&As</sup>

MS-600$^{Q\&As}$

Building Applications and Solutions with Microsoft 365 Core Services

## Pass Microsoft MS-600 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

**https://www.pass2lead.com/ms-600.html**

### 100% Passing Guarantee
### 100% Money Back Assurance

Following Questions and Answers are all new published by Microsoft Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update

⚙ **800,000+** Satisfied Customers

**QUESTION 1**

HOTSPOT

You have a web app that uses the Microsoft Identity Platform.

You need to configure authentication for the app to allow sign-ins for the following user accounts:

1.

Users from your company

2.

Users from another company that has Azure Active Directory (Azure AD) user accounts

How should you complete the application manifest? To answer, select the appropriate options in the answer area.

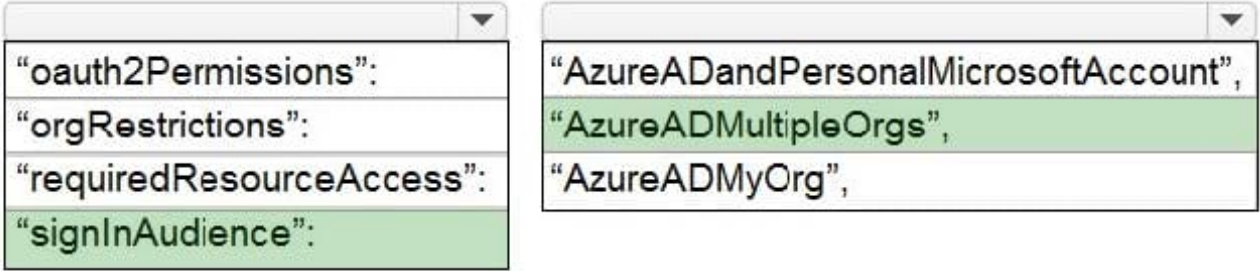NOTE: Each correct selection is worth one point.

Hot Area:

## Answer Area

```
{
    ...
```

| "oauth2Permissions": ▼ | "AzureADandPersonalMicrosoftAccount", ▼ |
|---|---|
| "orgRestrictions": | "AzureADMultipleOrgs", |
| "requiredResourceAccess": | "AzureADMyOrg", |
| "signInAudience": | |

```
    "tags": [],
    "tokenEncryptionKeyId": null,
    "verifiedPublisher": {
        "displayName": null,
        "verifiedPublisherId": null,
        "addedDateTime": null
    }
    ...
}
```

Correct Answer:

## Answer Area

```
{
    . . .

    ┌─────────────────────────────┬───┐    ┌─────────────────────────────────────────┬───┐
    │                             │ ▼ │    │                                         │ ▼ │
    ├─────────────────────────────┴───┤    ├─────────────────────────────────────────┴───┤
    │ "oauth2Permissions":            │    │ "AzureADandPersonalMicrosoftAccount",        │
    │ "orgRestrictions":              │    │ "AzureADMultipleOrgs",                        │
    │ "requiredResourceAccess":       │    │ "AzureADMyOrg",                               │
    │ "signInAudience":               │    │                                               │
    └─────────────────────────────────┘    └───────────────────────────────────────────────┘

    "tags": [],
    "tokenEncryptionKeyId": null,
    "verifiedPublisher": {
        "displayName": null,
        "verifiedPublisherId": null,
        "addedDateTime": null
    }
    . . .
}
```

Reference: https://docs.microsoft.com/en-us/azure/active-directory/develop/reference-app-manifest

---

**QUESTION 2**

HOTSPOT

You have an application that has the code shown in the exhibits. (Click the JavaScript Version tab or the C# Version tab.)

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

JavaScript Version

```
const fs = require("fs");
const execute = async (accessToken: string, filename: string): Promise<void> => {
        //...
        const stream = await client.api('/me/drive/root/children/${filename}/content')
                .getStream();
        let writeStream = fs.createWriteStream('../${filename}');
        stream.pipe(writeStream).on("error", (err) => {
                throw err;
        });
        writeStream.on("error", (err) => {
                throw err;
        });
        await new Promise((resolve) => writeStream.on("finish", resolve));
}
//...
```

C# Version

```
namespace MyProject {
     class Handler {
          public async Task Execute(string accessToken, string path) {
               var client = new GraphServiceClient(new GraphAuthProvider(accessToken));
               var pathRequestBuilder = client.Drive.Root.ItemWithPath(path);
               var file = await pathRequestBuilder.Request().GetAsync();
               if (file.File != null)
               {
                    using (var content = await pathRequestBuilder.Content.Request().GetAsync())
                    using (var diskFile = System.IO.File.Create(file.Name))
                    {
                         content.Seek(0, System.IO.SeekOrigin.Begin);
                         await content.CopyToAsync(diskFile);
                         await diskFile.FlushAsync();
                    }
               }
          }
     }
}
```

Hot Area:

**Answer Area**

| Statements | Yes | No |
|---|---|---|
| The code uploads a file to a Microsoft SharePoint Online site. | ○ | ○ |
| The code creates a file in Microsoft OneDrive. | ○ | ○ |
| The code downloads a file from Microsoft OneDrive. | ○ | ○ |

Correct Answer:

**Answer Area**

| Statements | Yes | No |
|---|---|---|
| The code uploads a file to a Microsoft SharePoint Online site. | ○ | ● |
| The code creates a file in Microsoft OneDrive. | ○ | ● |
| The code downloads a file from Microsoft OneDrive. | ● | ○ |

Box 1: No

Box 2: No

Box 3: Yes

A file is downloaded from OneDrive and saved locally.

Drive/Root is the drive resource is the top level object representing a user\\'s OneDrive or a document library in SharePoint.

Reference: https://docs.microsoft.com/en-us/graph/api/resources/drive

**QUESTION 3**

You are developing a SharePoint Framework (SPFx) web part. The web part will call a backend API that is secured by using Azure Active Directory (Azure AD). The web part will be on a page that has many other web parts. Which type of

web part should you use to ensure that access to the API is exclusive to the web part?

A. isolated

B. SharePoint-hosted

C. provider-hosted

D. connected

Correct Answer: A

Reference: https://docs.microsoft.com/en-us/sharepoint/dev/spfx/web-parts/isolated-web-parts

**QUESTION 4**

You have an application that uses the Microsoft Graph API.

You need to configure the application to retrieve the groups to which the current signed-in user belongs. The results must contain the extended priorities of the groups.

Which URI should you use?

A. https://graph.microsoft.com/v1.0/me/getMemberObjects

B. https://graph.microsoft.com/v1.0/me/getMemberGroups

C. https://graph.microsoft.com/v1.0/me/memberOf

D. https://graph.microsoft.com/v1.0/me/checkMemberGroups

Correct Answer: B

Get member groups returns all the groups that the specified user, group, or directory object is a member of. This function is transitive. Reference: https://docs.microsoft.com/en-us/graph/api/directoryobject-getmembergroups

**QUESTION 5**

You are developing a Microsoft Team application. To host a webpage in a Teams tab, the manifest file must include the contentUrl property within the staticTabs property.

Instructions: Review the underline text. If the makes the statement correct, select `\\' No change is needed. `\\' If the statement is incorrect, select the answer choice that makes the statement correct.

A. No change is needed.

B. websiteUrl property within the configuragbleTabs property

C. ValidDomain property within the configuragbleTabs property

D. ValidDomain property within the statictabs property

Correct Answer: B

**Latest MS-600 Dumps**          **MS-600 PDF Dumps**          **MS-600 Study Guide**