Pass2Lead

https://Pass2Lead.com

NSE5_FMG-6.0^{Q&As}

Fortinet NSE 5 - FortiManager 6.0

Pass Fortinet NSE5_FMG-6.0 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass2lead.com/nse5_fmg-6-0.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Fortinet Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update

⚙ **800,000+** Satisfied Customers

QUESTION 1

View the following exhibit.

Edit Address

Address Name
> Training

Type
> IP/Netmask

IP/Network
> 192.168.1.0/255.255.255.255.0

Interface
> any

Static Route Configuration
> | | OFF |

Comments
> | | 0/255

Add to Groups
> Click to add

Advanced Options >

Per-Device Mapping
> | ON | |

+ Add   ✎ Edit   🗑 Delete

	Name	VDOM	Details
	Local-FortiGate	root	IP/Netmask10.0.1.0/255.255.255.0

An administrator has created a firewall address object, Training, which is used in the Local-FortiGate policy package. When the install operation is performed, which IP Netmask will be installed on the Local-FortiGate, for the Training firewall address object?

A. 10.0.1.0/24

B. It will create firewall address group on Local-FortiGate with 192.168.0.1/24 and 10.0.1.0/24 object values

C. 192.168.0.1/24

D. Local-FortiGate will automatically choose an IP Network based on its network interface settings.

Correct Answer: A

QUESTION 2

View the following exhibit.

Starting Log (Run the device)

Start installing
Local-FortiGate $ config user device
Local-FortiGate (device) $ edit "mydevice"
new entry 'mydevice' added
Local-FortiGate (mydevice) $ next
MAC address can not be 0
Node_check_object fail!for mac 00:00:00:00:00:00
Attribute 'mac' value '00:00:00:00:00:00' checkingfail -33
Command fail. Return code 1
Local-FortiGate (device) $ end
...
Local-FortiGate $ config firewall policy
Local-FortiGate (policy) $ edit 2
New entry '2' added
Local-FortiGate (2) $ set name "Device_policy"
Local-FortiGate (2) $ set uuid 64...
Local-FortiGate (2) $ set srcintf "port3"
Local-FortiGate (2) $ set dstintf "port1"
Local-FortiGate (2) $ set srcaddr "all"
Local-FortiGate (2) $ set dstaddr "all"
Local-FortiGate (2) $ set action accept
Local-FortiGate (2) $ set schedule "always"
Local-FortiGate (2) $ set service "ALL"
Local-FortiGate (2) $ set devices "mydevice"
Entry not found in datasource
Value parse error before 'mydevice'
Command fail. Return code -3
Local-FortiGate (2) $ set nat enable
Local-FortiGate (2) $ next
Local-FortiGate (policy) $ end
...

Which statement is true regarding this failed installation log?

A. Policy ID 2 is installed without a source address

B. Policy ID 2 will not be installed

C. Policy ID 2 is installed in disabled state

D. Policy ID 2 is installed without a source device

Correct Answer: D

QUESTION 3

View the following exhibit.

When using Install Config option to install configuration changes to managed FortiGate, which of the

following statements are true? (Choose two.)
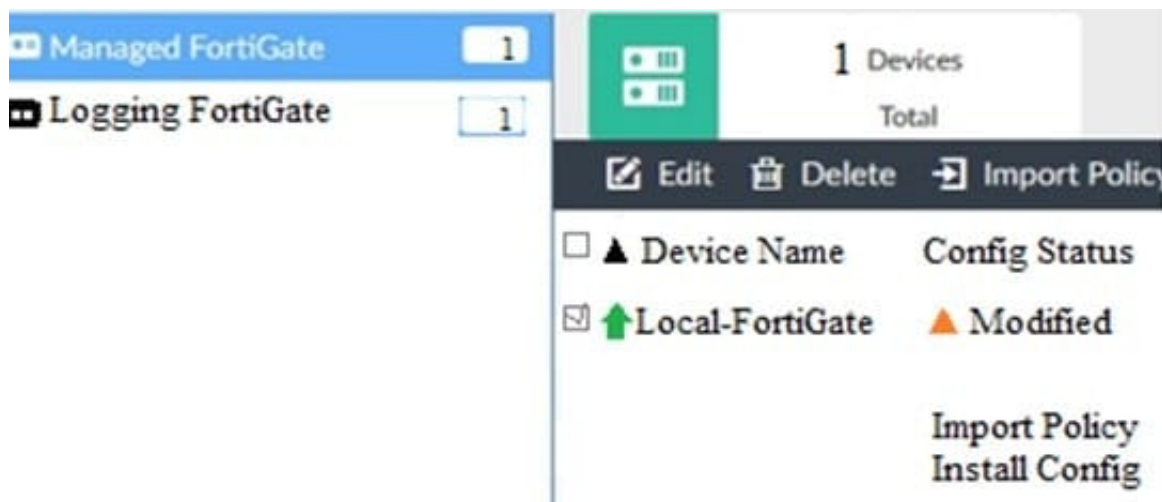
A. Once initiated, the install process cannot be canceled and changes will be installed on the managed device

B. Will not create new revision in the revision history

C. Installs device-level changes to FortiGate without launching the Install Wizard

D. Provides the option to preview configuration changes prior to installing them

Correct Answer: AC

QUESTION 4

What configuration setting for FortiGate is part of a device-level database on FortiManager?

A. VIP and IP Pools

B. Firewall policies

C. Security profiles

D. Routing

Correct Answer: D

QUESTION 5

Which of the following statements are true regarding schedule backup of FortiManager? (Choose two.)

A. Backs up all devices and the FortiGuard database.

B. Does not back up firmware images saved on FortiManager

C. Supports FTP, SCP, and SFTP

D. Can be configured from the CLI and GUI

Correct Answer: CD

NSE5_FMG-6.0 VCE Dumps

NSE5_FMG-6.0 Practice Test

NSE5_FMG-6.0 Study Guide