

# NSE8\_811<sup>Q&As</sup>

Fortinet NSE 8 Written Exam (NSE8\_811)

**Pass Fortinet NSE8\_811 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

[https://www.pass2lead.com/nse8\\_811.html](https://www.pass2lead.com/nse8_811.html)

100% Passing Guarantee  
100% Money Back Assurance


Following Questions and Answers are all new published by Fortinet  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

Refer to the exhibit.

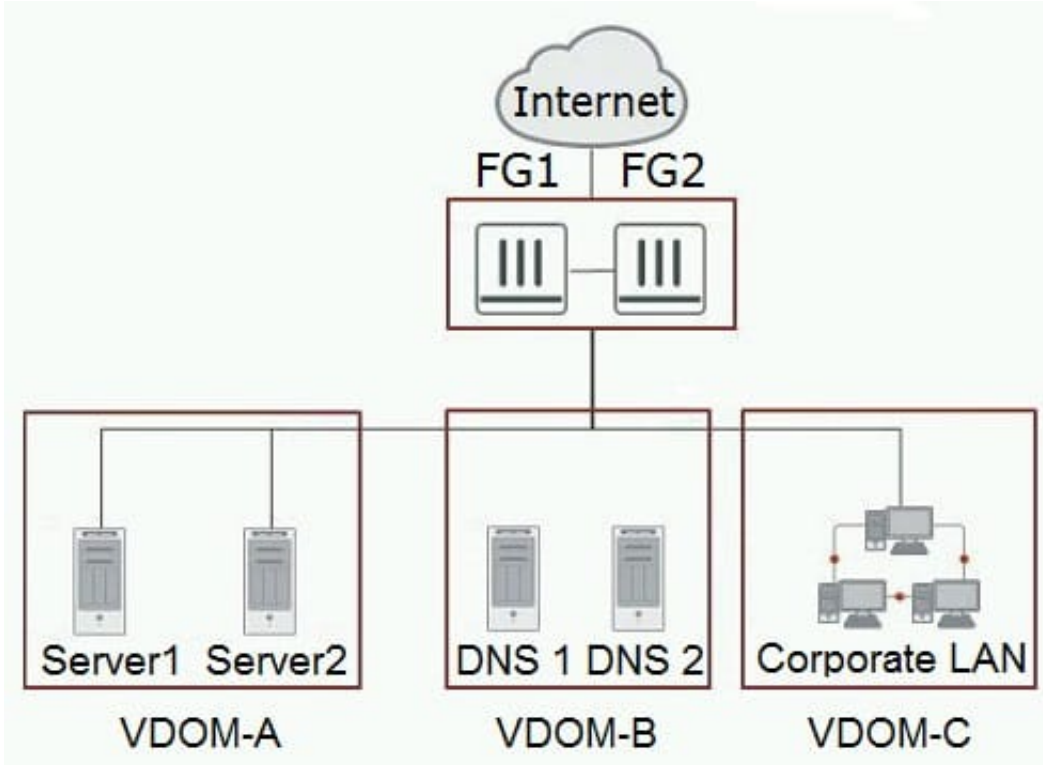

You need to apply the security features listed below to the network shown in the exhibit.

High grade DDoS protection Web security and load balancing for Server 1 and Server 2 Solution must be PCI DSS compliant Enhanced security to DNS 1 and DNS 2

What are three solutions for this scenario? (Choose three.)

- A. FortiDDoS between FG1 and FG2 and the Internet
- B. FortiADC for VDOM-A
- C. FortiWeb for VDOM-A
- D. FortiADC for VDOM-B
- E. FortiDDoS between FG1 and FG2 and VDOMs

Correct Answer: ACD

**QUESTION 2**

Refer to the exhibit.

```
config waf url-rewrite url-rewrite-rule
  edit "NSE8-rule"
    set action redirect
    set location "https://$0/$1"
    set host-status disable
    set host-use-pserver disable
    set referer-status disable
    set referer-use-pserver disable
    set url-status disable
config match-condition
  edit 1
    set reg-exp "(.*)"
    set protocol-filter enable
  next
  edit 2
    set object http-url
    set reg-exp "^/(.*)$"
  next
end
next
end
config waf url-rewrite url-rewrite-policy
  edit "nse8-rewrite"
config rule
  edit 1
    set url-rewrite-rule-name "NSE8-rule"
  next
end
next
end
```

The exhibit shows the steps for creating a URL rewrite policy on a FortiWeb. Which statement represents the purpose of this policy?

- A. The policy redirects all HTTPS URLs to HTTP.
- B. The policy redirects all HTTP URLs to HTTPS.

- C. The policy redirects only HTTP URLs containing the ^/(.\*)\$ string to HTTPS.
- D. The policy redirects only HTTPS URLs containing the ^/(.\*)\$ string to HTTP.

Correct Answer: B

**QUESTION 3**

A FortiGate is used as a VPN hub for a number of remote spoke VPN units (Group A) spokes using a phase 1 main mode dial-up tunnel and pre-shared keys. You are asked to establish VPN connectivity for a newly acquired organization's sites for which new devices will be provisioned Group B spokes.

Both existing Group A and new Group B spoke units are dynamically addressed through a single public IP Address on the hub. You are asked to ensure that spokes from Group B have different access permissions than the existing VPN spokes units Group A.

Which two solutions meet the requirements for the new spoke group? (Choose two.)

- A. Implement a new phase 1 dial-up main mode tunnel with a different pre-shared key than the Group A spokes.
- B. Implement a new phase 1 dial-up main mode tunnel with certificate authentication.
- C. Implement a new phase 1 dial-up main mode tunnel with pre-shared keys and XAuth.
- D. Implement separate phase 1 dial-up aggressive mode tunnels with a distinct peer ID.

Correct Answer: CD

**QUESTION 4**

Refer to the exhibit.

The screenshot shows the 'Service Deployments' tab in the FortiGate management console. The NSX Manager is set to 10.10.50.3. Under 'Network & Security Service Deployments', there is a table with one entry:

Service	Version	Installation Status	Service Status	Cluster	Datastore	Port Group	IP Address
FGTVMX	5.6.0.1449	Failed	Unknown	VMX-Cluster	datastore1	VMX-DPortGr	DHCP

At the bottom right of the table area, it says '1 items'.

While deploying a new FortiGate-VMX Security node, an administrator receives the error message shown in the exhibit.

In this scenario, which statement is correct?

- A. The NSX Manager is not able to connect on the FortiGate Service Manager RestAPI service.
- B. The vCenter is not able to locate the FortiGate-VMX OVF file.
- C. The FortiGate Service Manager does not have the proper permission to register the FortiGate-VMX Service.
- D. The vCenter cannot connect to the FortiGate Service Manager.

Correct Answer: B

---

#### QUESTION 5

A customer wants to use a central RADIUS server for management authentication when connecting to the FortiGate GUI and to provide different levels of access for different types of employees.

Which three actions are required to provide the requested functionality? (Choose three.)

- A. Create a wildcard administrator on the FortiGate.
- B. Enable radius-vdom-override in the CLI.
- C. Create multiple administrator profiles with matching RADIUS VSAs.
- D. Enable accprofile-override in the CLI.
- E. Set the RADIUS authentication type to MS-CHAPv2.

Correct Answer: ACD

[Latest NSE8\\_811 Dumps](#)

[NSE8\\_811 VCE Dumps](#)

[NSE8\\_811 Study Guide](#)