

C9530-272^{Q&As}

IBM WebSphere Message Broker V8.0 Solution Development

Pass IBM C9530-272 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass2lead.com/c9530-272.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by IBM Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

A solution developer needs to determine why the latest update to a message flow does not work as designed. It is thought that the latest update has not been deployed to the broker. What command can the solution developer use to determine which BAR file is deployed?

- A. mqsilist
- B. mqsireadbar
- C. mqsireportbroker
- D. mqsireportproperties

Correct Answer: A

QUESTION 2

A solution developer has deployed a message flow containing the DatabaseRetrieve node. The connection properties to the database were created using the mqsicreateconfigurable service command. The solution developer has been told that the database is to be relocated to a different server. How should the connection properties be updated by the solution developer to reflect the new server?

- A. Run mqsisetdbparms.
- B. Run mqsichangebroker.
- C. Run mqsichangeproperties.
- D. Use a context sensitive menu in the Broker view of the Toolkit.

Correct Answer: C

QUESTION 3


A solution developer creates a message flow that includes an XSLTransform node. The node property specifies that the XSL style sheet is to be cached. The solution developer deploys the XSL style sheet in the BAR file with the message flow. Subsequently, the style sheet needs to be revised. How does the solution developer enable the message flow to use the revised style sheet?

- A. Use the mqsicacheadmin command to refresh the cache with the new style sheet.
- B. Update the BAR file with the modified style sheet and redeploy it.
- C. Update the style sheet in the Application Development view of the Toolkit. Once the changes are saved, the style sheet is reloaded automatically by any message flows that use it.
- D. Update the style sheet in the directory specified by the Style sheet directory property of the XSLTransform node. Once the changes are saved, the style sheet is reloaded automatically by any message flows that use it.

Correct Answer: B

QUESTION 4

A company has person information in its HR system and another application system. Person schemas in these two systems are similar. The solution developer uses the Mapping node to map the person information when developing an application. Following is the detailed information about the Mapping node.

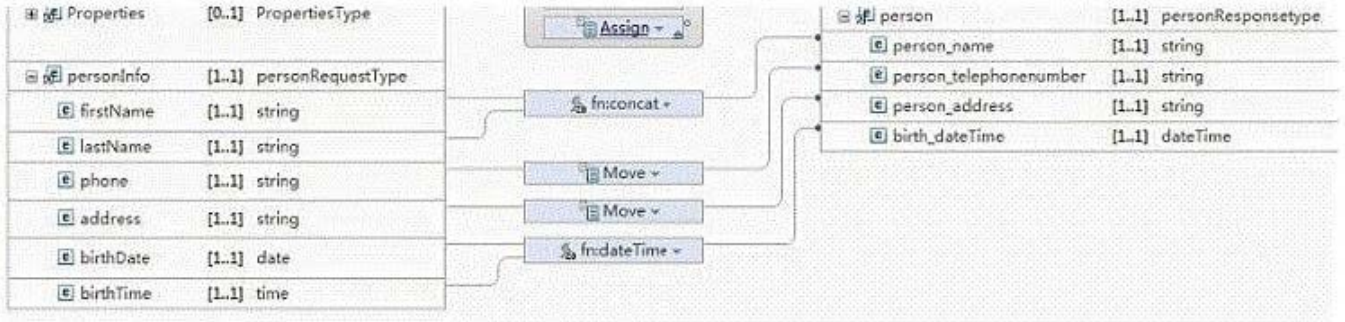

fn:concat has the following format.

string1	xs:string	\$firstName
string2	xs:string	'.'
string3	xs:string	\$lastName

fn:dateTime has the following logic.

date	xs:date	\$birthDate
time	xs:time	\$birthTime

This is the person information record that exists in the HR system.

```
<personInfo>
  <firstName>Alexandra</firstName>
  <lastName>Thomas</lastName>
  <phone>+1-803-467-1234</phone>
  <address>Pennsylvania Avenue NW,Washington DC</address>
  <birthDate>1971-04-17</birthDate>
  <birthTime>09:05:03</birthTime>
</personInfo>
```

After the solution developer performs this transformation for this person information, which one of following results is correct?

- A. A. Alexandra . Thomas +1-803-467-1234 Pennsylvania Avenue NW,Washington DC 1971-04-17 09:05:03
- B. B. Alexandra . Thomas +1-803-467-1234 Pennsylvania Avenue NW,Washington DC 1971-04-17T09:05:03

C. C. Alexandra Thomas +1-803-467-1234 Pennsylvania Avenue NW, Washington DC 1971-04-17T09:05:03

D. D. Alexandra Thomas +1-803-467-1234 Pennsylvania Avenue NW, Washington DC 1971-04-17 09:05:03

Correct Answer: B

QUESTION 5


A solution developer needs to use the recording data feature for auditing purpose. The expected message size is up to 10 MB and the target database is DB2. Aside from the default, what additional configuration (s), if any, does the solution developer need to do?

- A. Use the supplied DB2 schema without changes.
- B. Update the DataCaptureStore configurable service to allow the extra size.
- C. Customize the supplied DB2 schema to increase the maximum message body size.
- D. Create a new database table to store the message body and configure the broker to use the new table.

Correct Answer: C

QUESTION 6

A solution developer needs to enhance a message flow with node information to aid in problem resolution, should there be a failure within the flow. Consider the following flow, named "OrderProcess".

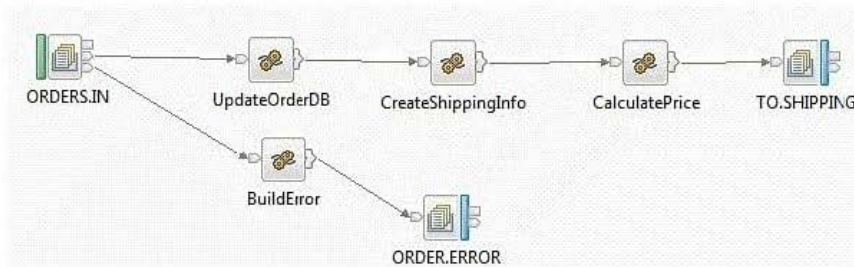

In the 3 Compute nodes, UpdateOrderDB, CreateShippingInfo and CalculatePrice, the solution developer inserts the following statements as the first 2 lines of ESQL:

```
SET OutputLocalEnvironment = InputLocalEnvironment;  
SET OutputLocalEnvironment.Mode = NodeLabel;
```

The BuildError Compute, which is linked to the ORDERS.IN Catch terminal, has the following ESQL added:

```
CREATE FIELD OutputRoot.XMLNSC.Fail.Location  
VALUE MessageFlowLabel ||  
'.' ||  
InputLocalEnvironment.Node;
```

On testing the flow, there is a failure within the CalculatePrice node.

What is the content of the Location tag in the message written to the ORDER.ERROR queue?

A.

- B. OrderProcess.
- C. OrderProcess.CalculatePrice
- D. OrderProcess.CreateShippingInfoD.OrderProcess.Creat eShippingInfo

Correct Answer: A

QUESTION 7

A solution developer needs to troubleshoot why a message flow does not process any messages from a remote resource. To review how the message flow interacts with all external resources, where should the solution developer look?

- A. The ODBC log.
- B. The JVERBOSE log.
- C. The WebSphere MQ log.
- D. The WebSphere Message Broker Activity log.

Correct Answer: D

QUESTION 8

A solution developer codes a JavaCompute node using a `getJDBCType4Connection` API call to connect to a JDBC database that is globally coordinated, and then writes code to insert new records into that database based on the contents of incoming MQ messages. The solution developer observes that database inserts are not rolled back if the message flow experiences an error after this Compute node. What must the solution developer do to correct this?

- A. Alter the code to use `MbSQLStatement`
- B. Insert code to issue statements to rollback
- C. Alter the Transaction Mode of the JavaCompute node to commit
- D. Alter the `type4DatasourceClassName` property of the `JDBCProvider`

Correct Answer: D

QUESTION 9

An electronics store needs to enhance their online inventory verification system regarding available inventory for a requested product. Instead of returning the inventory count as a web response, an invoice for the purchase is to be generated and automatically sent to the online shipping system. Which web service standard and which SOAP node can the solution developer change to enhance the message flow?

- A. WS-Addressing and `SOAPInput`
- B. WS-Addressing and `SOAPReply`

C. WS-Security and SOAPRequest

D. WS-ReliableMessaging and SOAPAsyncRequest

Correct Answer: A

QUESTION 10

To activate any new function included in a fix pack, which command must the solution developer issue?

A. mqsicvp command.

B. mqsireload command.

C. mqsichangebroker command with the -f parameter.

D. mqsichangeproperties command with the -n parameter.

Correct Answer: C

[Latest C9530-272 Dumps](#)

[C9530-272 PDF Dumps](#)

[C9530-272 Exam Questions](#)