

# NSE7\_PBC-6.4<sup>Q&As</sup>

Fortinet NSE 7 - Public Cloud Security 6.4

## Pass Fortinet NSE7\_PBC-6.4 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

[https://www.pass2lead.com/nse7\\_pbc-6-4.html](https://www.pass2lead.com/nse7_pbc-6-4.html)

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Fortinet  
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

```
207     "osDisk": {
208       "osType": "Linux",
209       "name": "sstentazfgt0402build3232disk01",
210       "caching": "ReadWrite",
211       "createOption": "Empty",
212       "managedDisk": {
213         "storageAccountType": "Standard_LRS"
214       },
215       "diskSizeGB": 2
216     },
217     "dataDisks": {
218       {
219         "lun": 0,
220         "name": "sstentazfgt0402build3232disk02",
221         "createOption": "Empty",
222         "caching": "None",
223         "managedDisk": {
224           "storageAccountType": "Standard_LRS"
225         },
226         "diskSizeGB": 30
227       },
228     ]
229   },
```

Refer to the exhibit. You attempted to deploy the FortiGate-VM in Microsoft Azure with the JSON template, and it failed to boot up. The exhibit shows an excerpt from the JSON template.

What is incorrect with the template?

- A. The LUN ID is not defined.
- B. FortiGate-VM does not support managedDisk from Azure.
- C. The caching parameter should be None.
- D. The CreateOptions parameter should be FromImage.

Correct Answer: D

**QUESTION 2**

You have been asked to secure your organization's salesforce application that is running on Microsoft Azure, and find an effective method for inspecting shadow IT activities in the organization. After an initial investigation, you find that many users access the salesforce application remotely as well as on-premises. Your goal is to find a way to get more visibility, control over shadow IT-related activities, and identify any data leaks in the salesforce application.


Which three steps should you take to achieve your goal? (Choose three.)

- A. Deploy and configure FortiCASB with a Fortinet FortiCASB subscription license.
- B. Configure FortiCASB and set up access rights, privileges, and data protection policies.

- C. Use FortiGate, FortiGuard, and FortiAnalyzer solutions.
- D. Deploy and configure FortiCWP with a workload guardian license.
- E. Deploy and configure FortiGate with Security Fabric solutions, and FortiCWP with a storage guardian advance license.

Correct Answer: ABC

### QUESTION 3

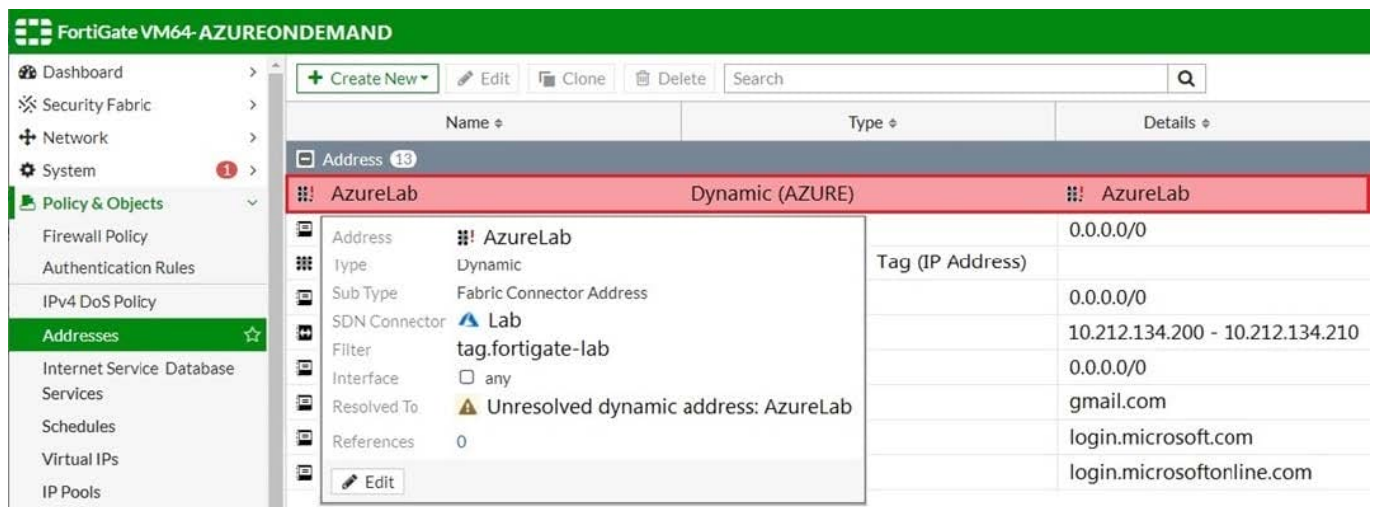

Refer to the exhibit. Your senior administrator successfully configured a FortiGate fabric connector with the Azure resource manager, and created a dynamic address object on the FortiGate VM to connect with a windows server in Microsoft Azure. However, there is now an error on the dynamic address object, and you must resolve the issue.

How do you resolve this issue?

- A. Run diagnose debug application azd -l on FortiGate.
- B. In the Microsoft Azure portal, set the correct tag values for the windows server.
- C. In the Microsoft Azure portal, access the windows server, obtain the private IP address, and assign the IP address under the FortiGate-VM AzureLab address object.
- D. Delete the address object and recreate a new address object with the type set to FQDN.

Correct Answer: C

### QUESTION 4

Your company deploys FortiGate VM devices in high availability (HA) (active-active) mode with Microsoft Azure load balancers using the Microsoft Azure ARM template. Your senior administrator instructs you to connect to one of the FortiGate devices and configure the necessary firewall rules. However, you are not sure now to obtain the correct public IP address of the deployed FortiGate VM and identify the access ports.

How do you obtain the public IP address of the FortiGate VM and identify the correct ports to access the device?

- A. In the configured load balancer, access the inbound NAT rules section.
- B. In the configured load balancer, access the backend pools section.
- C. In the configured load balancer, access the inbound and outbound NAT rules section.
- D. In the configured load balancer, access the health probes section.

Correct Answer: C

Reference: <https://www.fortinet.com/content/dam/fortinet/assets/deployment-guides/dg-fortigate-highavailability-azure.pdf>

---

#### QUESTION 5

An Amazon Web Services (AWS) auto-scale FortiGate cluster has just experienced a scale-down event, terminating a FortiGate in availability zone C.

What action will the worker node automatically perform to restore access to the black-holed subnet?

- A. The worker node applies a route table from a non-black-holed subnet to the black-holed subnet.
- B. The worker node moves the virtual IP of the terminated FortiGate to a running FortiGate on the worker node's private subnet interface.
- C. The worker node modifies the route table applied to the black-holed subnet changing its default route to point to a running FortiGate on the worker node's private subnet interface.
- D. The worker node migrates the subnet to a different availability zone.

Correct Answer: D

[Latest NSE7\\_PBC-6.4 Dumps](#)

[NSE7\\_PBC-6.4 Study Guide](#)

[NSE7\\_PBC-6.4 Braindumps](#)